



DATA SHEET		Date	29-Mar-24
Model	GHA700F-12-J1	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Ikehata

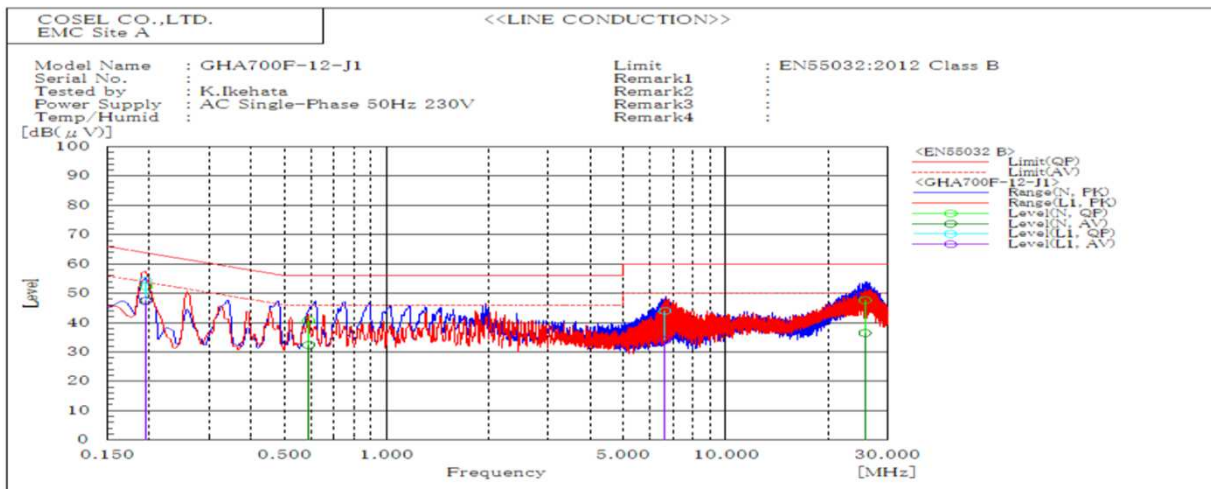


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.195	L1	54.5	47.4	63.8	53.8	9.3	6.4	Pass	
6.623	L1	44.0	34.0	60.0	50.0	16.0	16.0	Pass	
0.196	N	52.4	47.6	63.8	53.8	11.4	6.2	Pass	
0.590	N	40.7	32.3	56.0	46.0	15.3	13.7	Pass	
25.722	N	47.7	36.4	60.0	50.0	12.3	13.6	Pass	

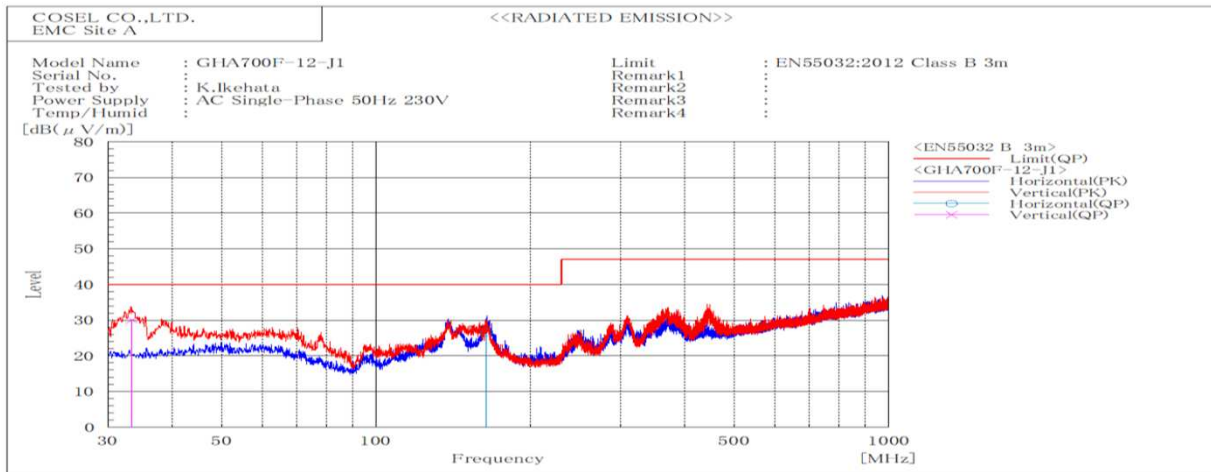


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP					
33.431	V	Stable	30.1	40.0	9.9	Pass	100.2	261.9	
164.389	H	Stable	26.5	40.0	13.5	Pass	247.4	27.2	

DATA SHEET		Date	29-Mar-24
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Ikehata

1. Line conduction

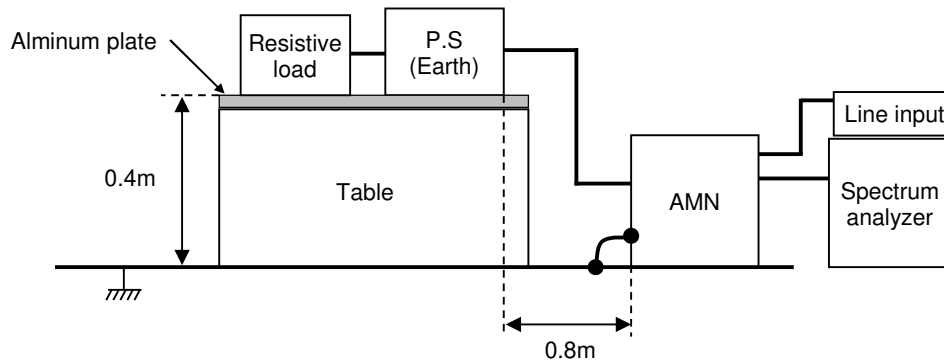

2. Radiated emission

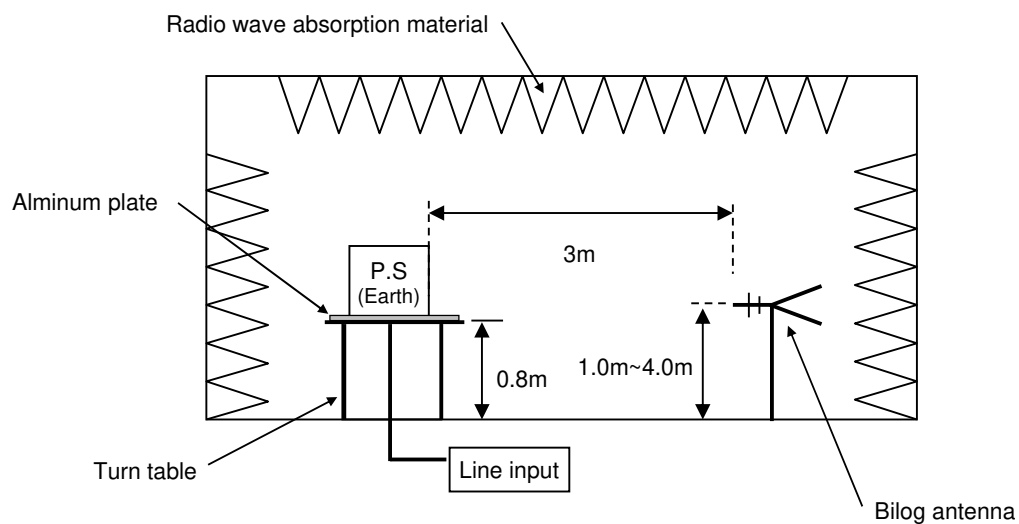


Conditions

Test : EMI
Model Name: GHA700F-12-J1

○Photographs of Test Set-Up

1.LINE CONDUCTION

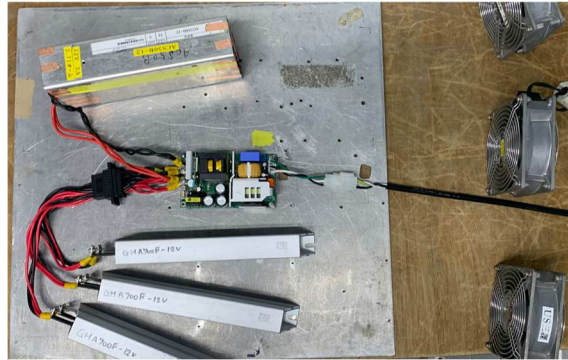

2.RADIATED EMISSION

