



DATA SHEET		Date	30-Jan-23
Model	GHA700F-30-J1	Temp.	21 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	26 %RH
		Tested by	K.Ikehata

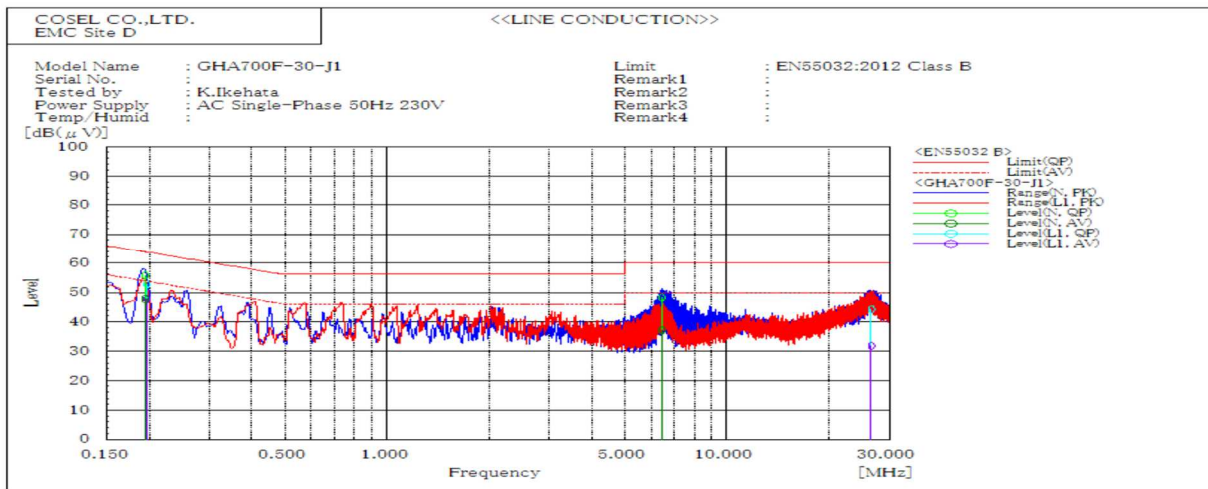


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.196	L1	52.8	47.8	63.8	53.8	11.0	6.0	Pass	
26.572	L1	44.3	32.0	60.0	50.0	15.7	18.0	Pass	
0.194	N	55.9	47.8	63.9	53.9	8.0	6.1	Pass	
6.440	N	48.2	37.2	60.0	50.0	11.8	12.8	Pass	

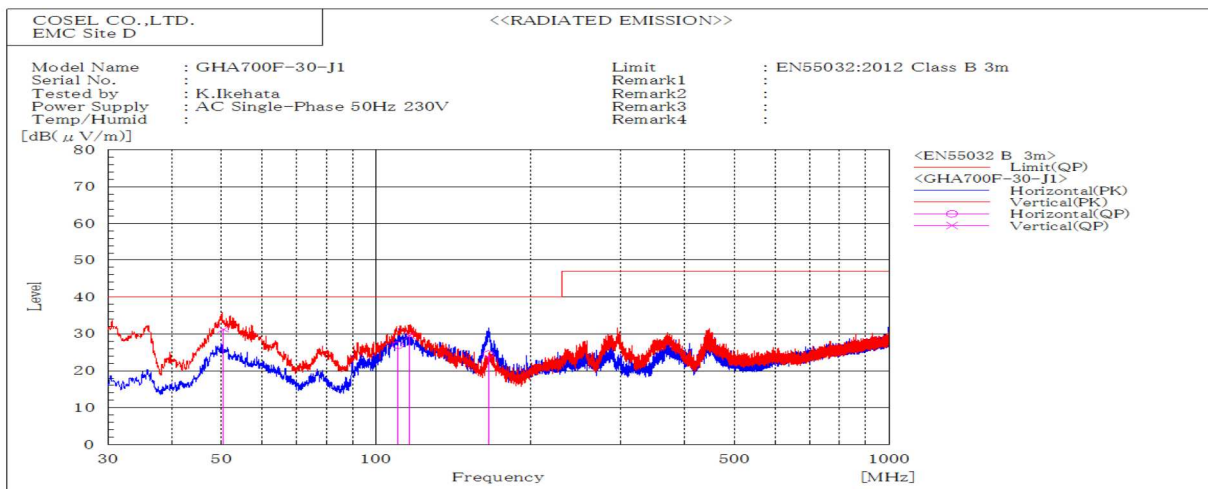


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	AV						
110.340	H	Stable	26.9	40.0	13.1	Pass	173.7	186.9		
165.677	H	Stable	24.4	40.0	15.6	Pass	190.2	0.0		
50.460	V	Stable	31.2	40.0	8.8	Pass	100.2	0.0		
116.387	V	Stable	29.5	40.0	10.5	Pass	101.7	34.2		

DATA SHEET		Date	30-Jan-23
Model	Circuit used for measurement	Temp.	21 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	26 %RH
		Tested by	K.Ikehata

1. Line conduction

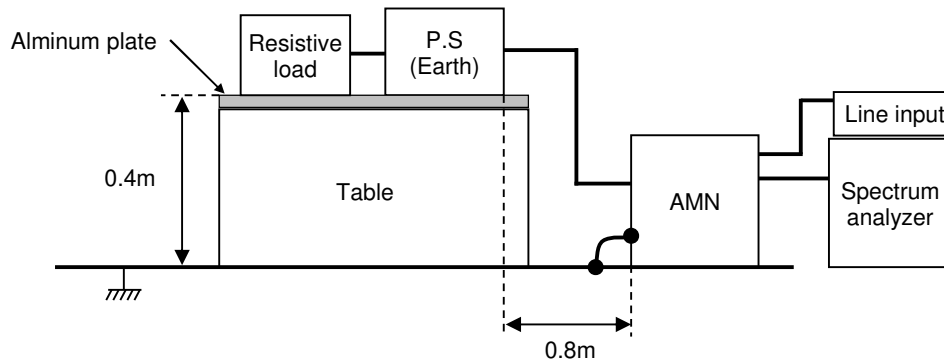

2. Radiated emission

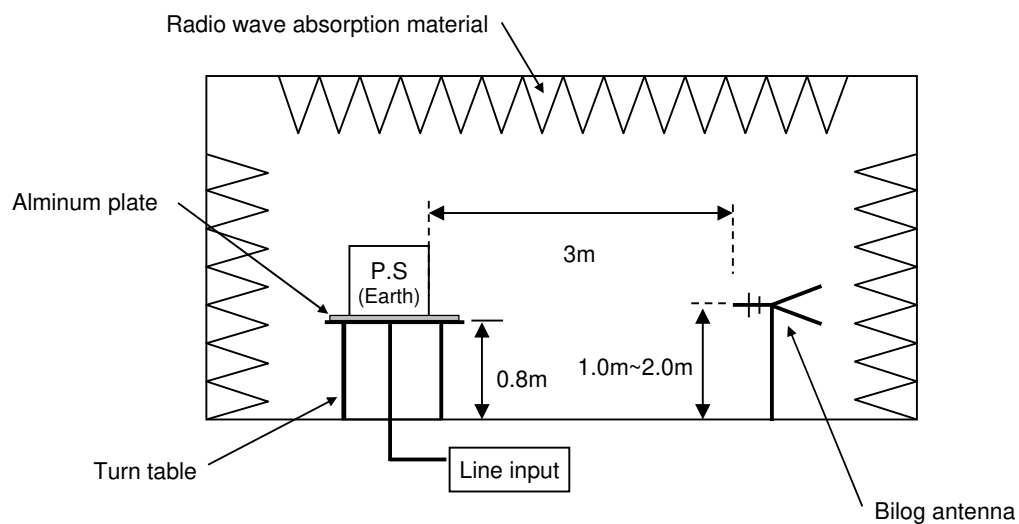

Conditions

Test : EMI
Model Name: GHA700F-30-J1

○Photographs of Test Set-Up

1.LINE CONDUCTION



2.RADIATED EMISSION

