



DATA SHEET		Date	01-Nov-17
Model	GMA300F-12	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	R.Motoyama

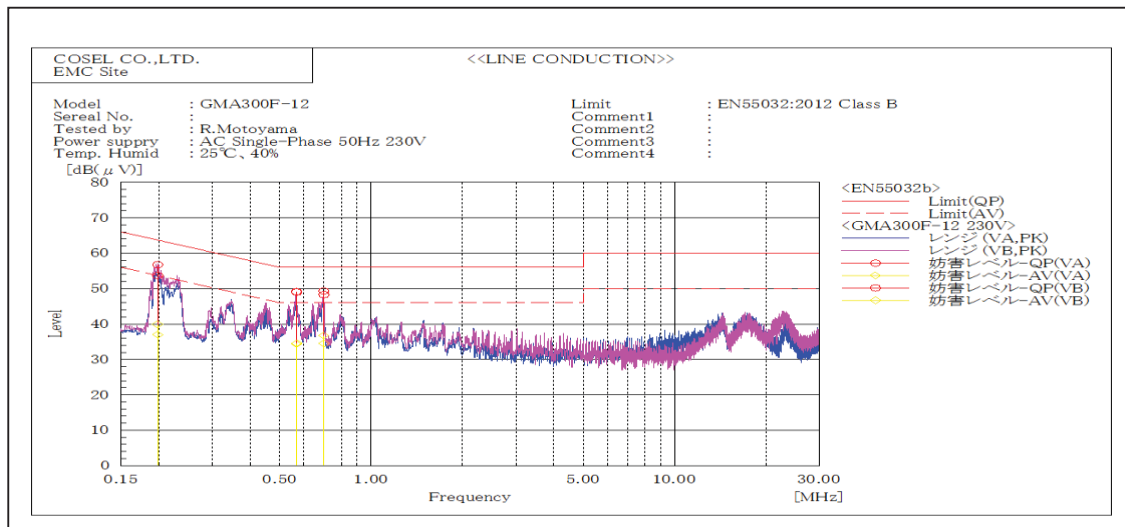


Frequency MHz	Line Phase	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.19805	VA	53.7	37.0	63.7	53.7	10.0	16.7	Pass	
0.19809	VB	56.7	39.9	63.7	53.7	7.0	13.8	Pass	
0.56701	VA	49.1	34.4	56.0	46.0	6.9	11.6	Pass	
0.56884	VB	49.0	34.6	56.0	46.0	7.0	11.4	Pass	
0.69827	VB	49.3	36.7	56.0	46.0	6.7	9.3	Pass	
0.69940	VA	48.3	34.5	56.0	46.0	7.7	11.5	Pass	

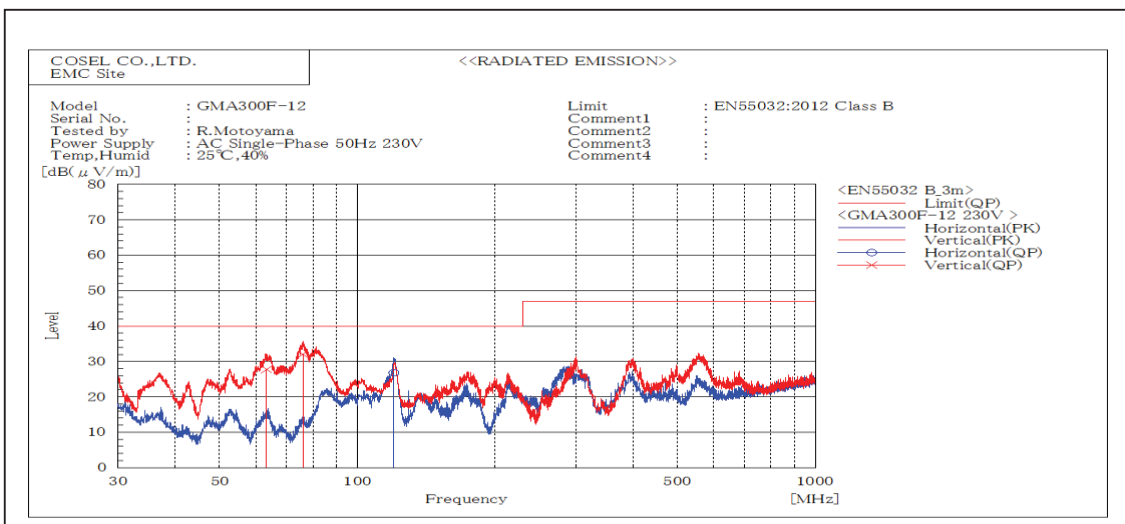


Frequency MHz	Polarization	Stability	Level dB(μV)	Limit dB(μV/m)	Margin dB(μV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
63.246	V	Stable	27.8	40.0	12.2	Pass	114	131	
76.028	V	Stable	32.0	40.0	8.0	Pass	102	130	
120.115	H	Stable	26.8	40.0	13.2	Pass	141	43	

DATA SHEET		Date	01-Nov-17
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Motoyama

1. Line conduction

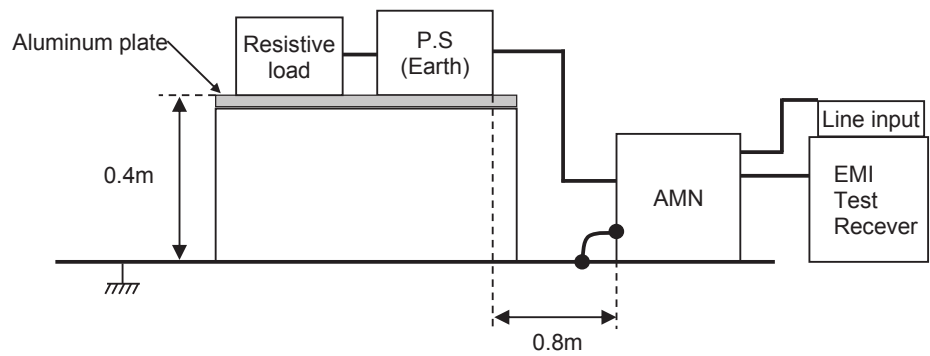

2. Radiated emission

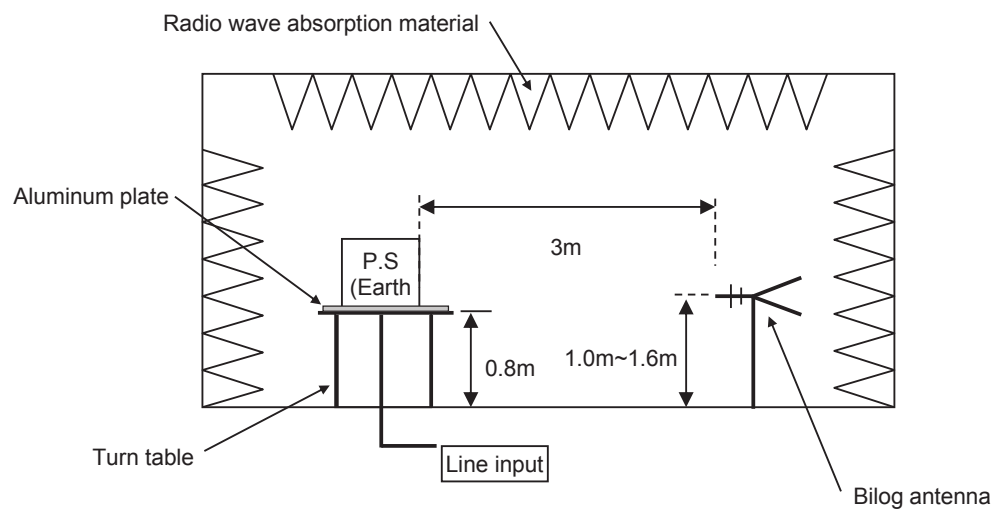


Conditions

Test : EMI
Model Name : GMA300F-12

Photographs of test set-up

1.LINE CONDUCTION

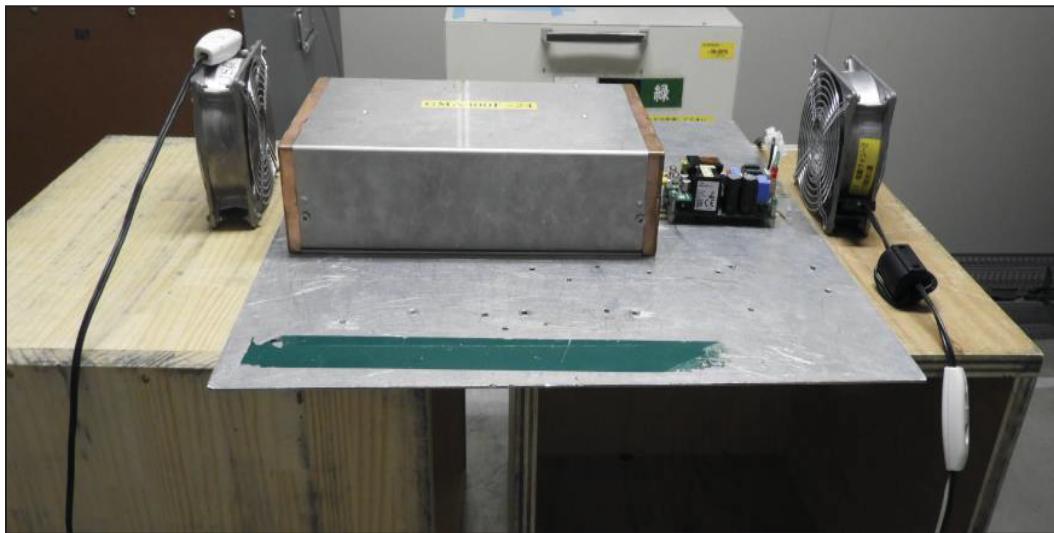

2.RADIATED EMISSION

