



# DATA SHEET

Model		GMA300F-24	Date	01-Nov-17
Test		EMI Line conduction & Radiated emission	Temp.	25 degreeC
			Humid.	40 %RH
			Tested by	R.Motoyama

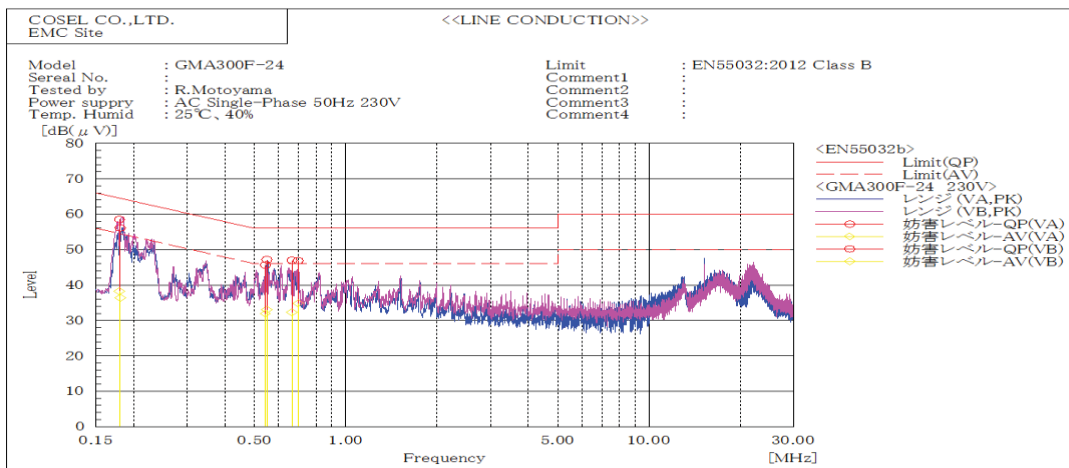


Frequency MHz	Line Phase	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.17927	VB	58.5	38.3	64.5	54.5	6.0	16.2	Pass	
0.18027	VA	56.1	36.4	64.5	54.5	8.4	18.1	Pass	
0.54286	VB	45.6	31.9	56.0	46.0	10.4	14.1	Pass	
0.54913	VA	47.2	33.0	56.0	46.0	8.8	13.0	Pass	
0.66515	VA	47.0	32.3	56.0	46.0	9.0	13.7	Pass	
0.69713	VB	46.9	34.9	56.0	46.0	9.1	11.1	Pass	

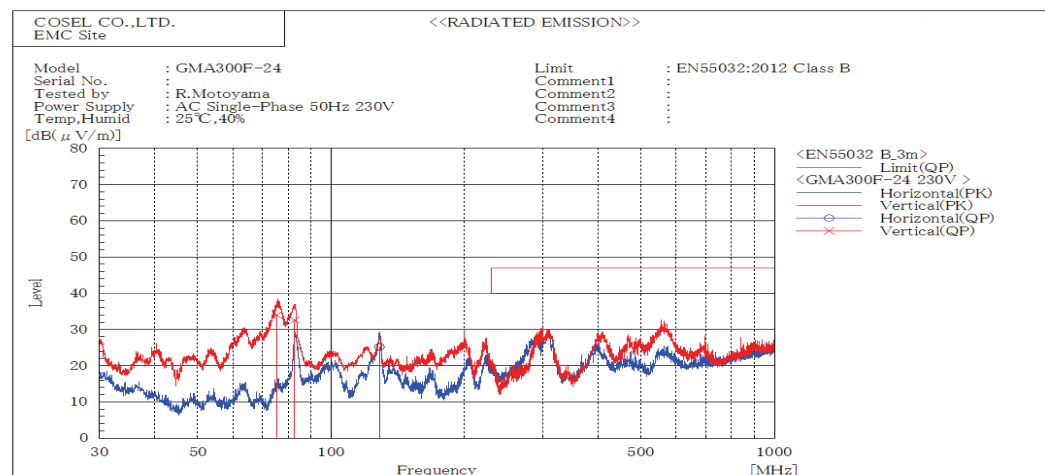


Frequency MHz	Polarization	Stability	Level dB(μV)		Limit dB(μV/m)		Margin dB(μV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	AV	QP	AV					
75.517	V	Stable	34.0		40.0		6.0	Pass	101	126	
82.702	V	Stable	32.5		40.0		7.5	Pass	131	2	
128.502	H	Stable	25.2		40.0		14.8	Pass	151	35	

DATA SHEET		Date	01-Nov-17
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Motoyama

1. Line conduction

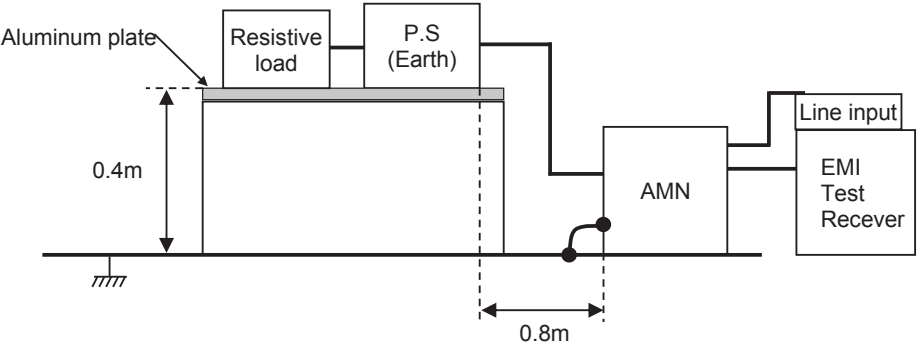

2. Radiated emission

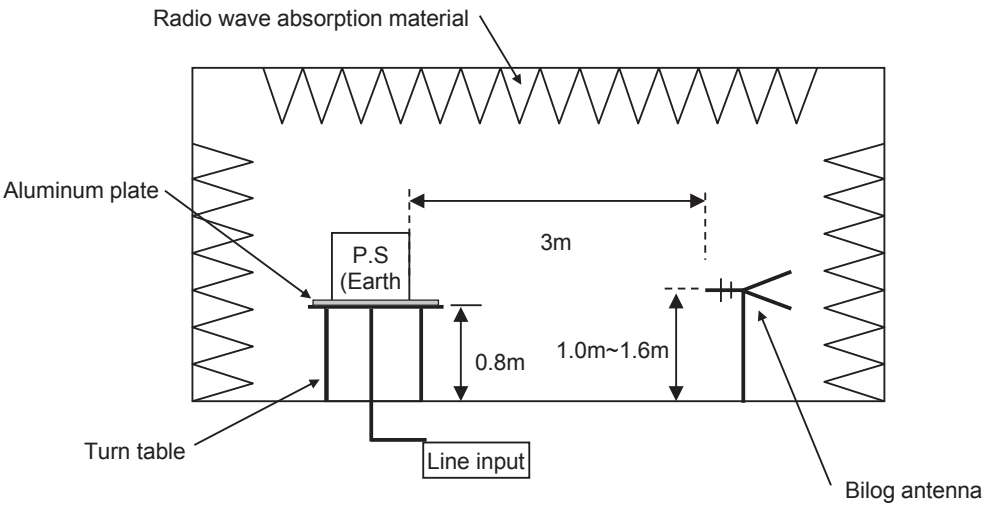


## Conditions

Test : EMI  
Model Name : GMA300F-24

## Photographs of test set-up

### 1.LINE CONDUCTION

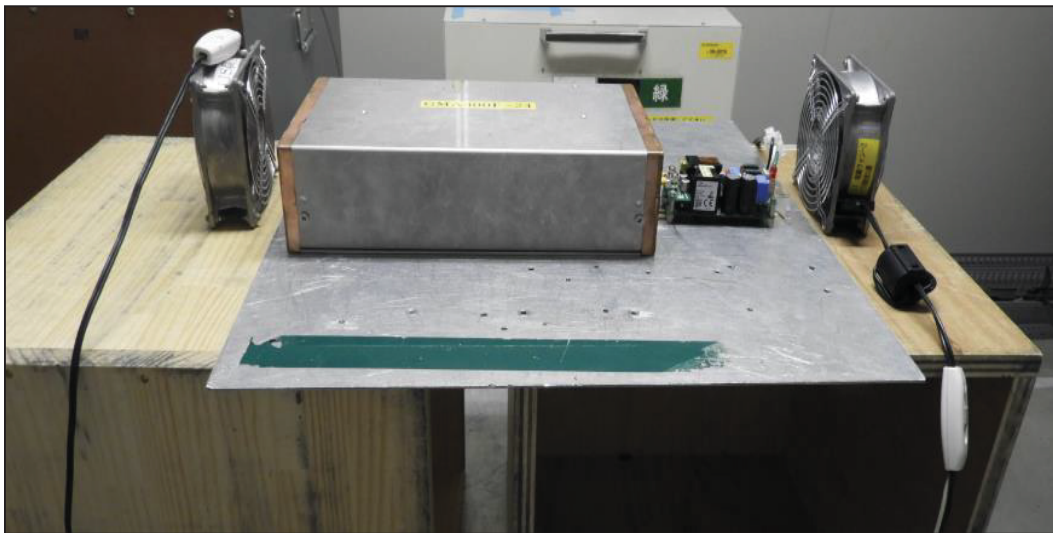

### 2.RADIATED EMISSION

