

Temperature increase of main components: 主要部品温度上昇

Model: KHEA480F

1. Conditions

- (1) Input :AC 85 ~ 264 [V]
- (2) Output :Rated output \*Derating is required at AC85 - 100[V] input.
- (3) Mounting method :Shown as Fig.1.1

2. Result

No.	Parts name	Symbol No.	Increase ( $\Delta T$ )						Rated temp. [°C]	Reference
			[deg]							
			24V	48V						
1	Line Filter	L104	57.4	55.7					120	
2	Rectifier(Input)	SS101	54.5	65.0					150	Junction Temp.
3	Choke Coil(Input)	L106	44.8	42.5					130	
4	Choke Coil(PFC)	L107	51.7	49.0					130	
5	Transistor(PFC)	TR101	62.2	56.2					105	Junction Temp.
6	Rectified Diode(PFC)	SS102	50.5	51.9					150	Junction Temp.
7	Input Capacitor	C111	29.9	30.4					105	
8	Switching Transistor	TR402	57.3	58.6					150	Junction Temp.
9	Transformer	T301	55.9	57.6					150	
10	Transformer	T401	80.0	67.9					150	
11	Rectified MOS-FET(Output)	TR501	59.7	56.0					150	Junction Temp.
12	Output Capacitor	C501	43.6	35.2					105	
13	Output Capacitor	C504	43.9	38.4					105	
14										
15										
16										
17										
18										
19										
20										

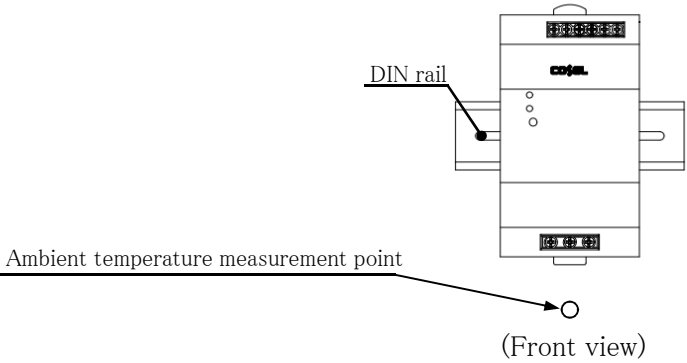


Fig.1.1 Mounting method  
(Normal position)

\*All information presented herein are not guaranteed.  
\*本資料は参考資料であり、その内容を保証するものではありません。