



# TEST DATA OF LCA10S-12

(100V INPUT)

Regulated DC Power Supply

Date : June 16. 1999

Approved by : N. Yamaguchi  
Design Manager

Prepared by : S. Taniguchi  
Design Engineer

コーワセル株式会社  
COSEL CO., LTD.



## C O N T E N T S

1. Line Regulation . . . . .	1
静的入力変動	
2. Input Current (by Load Current) . . . . .	2
入力電流 (負荷特性)	
3. Input Power (by Load Current) . . . . .	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage) . . . . .	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current) . . . . .	5
効率 (負荷特性)	
6. Hold-Up Time . . . . .	6
出力保持時間	
7. Instantaneous Interruption Compensation . . . . .	7
瞬時停電保障	
8. Load Regulation . . . . .	8
静的負荷変動	
9. Ripple Voltage (by Load Current) . . . . .	9
リップル電圧 (負荷特性)	
10. Ripple-Noise . . . . .	10
リップルノイズ	
11. Overcurrent Protection . . . . .	11
過電流保護	
12. Inrush Current . . . . .	12
突入電流	
13. Dynamic Load Response . . . . .	13
動的負荷変動	
14. Rise and Fall Time . . . . .	14
立上り、立下がり時間	
15. Ambient Temperature Drift . . . . .	15
周囲温度変動	
16. Minimum Input Voltage for Regulated Output Voltage .	16
最低レギュレーション電圧	
17. Ripple Voltage (by Ambient Temperature) . . . . .	17
リップル電圧 (周囲温度特性)	
18. Time Lapse Drift . . . . .	18
経時ドリフト	
19. Output Voltage Accuracy . . . . .	19
定電圧精度	
20. Condensation . . . . .	20
結露特性	
21. Leakage Current . . . . .	21
漏洩電流	
22. Line Noise Tolerance . . . . .	22
入力雑音耐量	
23. Conducted Emission . . . . .	23
雑音端子電圧	
24. Figure of Testing Circuitry . . . . .	24
測定回路図	

(Final Page 25 )

**COSEL**

Model	LCA10S-12	Temperature Testing Circuitry	25°C Figure A																																
Item	Line Regulation 静的入力変動																																		
Object	+12.0V 0.9A																																		
1. Graph			2. Values																																
<p style="text-align: center;">□ Load 50% △ Load 100%</p>			<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>75</td><td>12.085</td><td>12.083</td></tr> <tr><td>80</td><td>12.085</td><td>12.084</td></tr> <tr><td>85</td><td>12.085</td><td>12.084</td></tr> <tr><td>90</td><td>12.085</td><td>12.084</td></tr> <tr><td>100</td><td>12.085</td><td>12.084</td></tr> <tr><td>110</td><td>12.085</td><td>12.084</td></tr> <tr><td>120</td><td>12.085</td><td>12.084</td></tr> <tr><td>132</td><td>12.084</td><td>12.083</td></tr> <tr><td>140</td><td>12.084</td><td>12.083</td></tr> </tbody> </table>	Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	75	12.085	12.083	80	12.085	12.084	85	12.085	12.084	90	12.085	12.084	100	12.085	12.084	110	12.085	12.084	120	12.085	12.084	132	12.084	12.083	140	12.084	12.083
Input Voltage [V]	Output Voltage [V]																																		
	Load 50%	Load 100%																																	
75	12.085	12.083																																	
80	12.085	12.084																																	
85	12.085	12.084																																	
90	12.085	12.084																																	
100	12.085	12.084																																	
110	12.085	12.084																																	
120	12.085	12.084																																	
132	12.084	12.083																																	
140	12.084	12.083																																	

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

**COSEL**


Model	LCA10S-12																																																									
Item	Input Current (by Load Current) 入力電流 (負荷特性)	Temperature Testing Circuitry	25°C Figure A																																																							
Output	—																																																									
1. Graph	—△— Input Volt. 85V —□— Input Volt. 100V —○— Input Volt. 132V																																																									
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.045</td><td>0.048</td><td>0.053</td></tr> <tr><td>0.15</td><td>0.097</td><td>0.092</td><td>0.087</td></tr> <tr><td>0.30</td><td>0.140</td><td>0.130</td><td>0.117</td></tr> <tr><td>0.45</td><td>0.182</td><td>0.167</td><td>0.147</td></tr> <tr><td>0.60</td><td>0.221</td><td>0.202</td><td>0.175</td></tr> <tr><td>0.75</td><td>0.260</td><td>0.236</td><td>0.203</td></tr> <tr><td>0.90</td><td>0.298</td><td>0.269</td><td>0.230</td></tr> <tr><td>0.99</td><td>0.320</td><td>0.289</td><td>0.246</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Current [A]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	0.045	0.048	0.053	0.15	0.097	0.092	0.087	0.30	0.140	0.130	0.117	0.45	0.182	0.167	0.147	0.60	0.221	0.202	0.175	0.75	0.260	0.236	0.203	0.90	0.298	0.269	0.230	0.99	0.320	0.289	0.246	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Current [A]																																																									
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																							
0.00	0.045	0.048	0.053																																																							
0.15	0.097	0.092	0.087																																																							
0.30	0.140	0.130	0.117																																																							
0.45	0.182	0.167	0.147																																																							
0.60	0.221	0.202	0.175																																																							
0.75	0.260	0.236	0.203																																																							
0.90	0.298	0.269	0.230																																																							
0.99	0.320	0.289	0.246																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
	<p>Note: Slanted line shows the range of the rated load current</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>																																																									

**COSEL**

Model	LCA10S-12																																																										
Item	Input Power (by Load Current) 入力電力（負荷特性）	Temperature 25°C	Testing Circuitry Figure A																																																								
Output	_____																																																										
1. Graph	<p>Legend:</p> <ul style="list-style-type: none"> <li>Input Volt. 85V (open triangle)</li> <li>Input Volt. 100V (open square)</li> <li>Input Volt. 132V (open circle)</li> </ul> <table border="1"> <thead> <tr> <th>Load Current [A]</th> <th>Input Power [W] (85V)</th> <th>Input Power [W] (100V)</th> <th>Input Power [W] (132V)</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>1.53</td><td>1.86</td><td>2.60</td></tr> <tr><td>0.15</td><td>3.76</td><td>4.03</td><td>4.67</td></tr> <tr><td>0.30</td><td>5.90</td><td>6.13</td><td>6.69</td></tr> <tr><td>0.45</td><td>8.07</td><td>8.28</td><td>8.80</td></tr> <tr><td>0.60</td><td>10.19</td><td>10.39</td><td>10.87</td></tr> <tr><td>0.75</td><td>12.41</td><td>12.56</td><td>13.01</td></tr> <tr><td>0.90</td><td>14.60</td><td>14.72</td><td>15.09</td></tr> <tr><td>0.99</td><td>15.98</td><td>16.05</td><td>16.40</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Load Current [A]	Input Power [W] (85V)	Input Power [W] (100V)	Input Power [W] (132V)	0.00	1.53	1.86	2.60	0.15	3.76	4.03	4.67	0.30	5.90	6.13	6.69	0.45	8.07	8.28	8.80	0.60	10.19	10.39	10.87	0.75	12.41	12.56	13.01	0.90	14.60	14.72	15.09	0.99	15.98	16.05	16.40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—						
Load Current [A]	Input Power [W] (85V)	Input Power [W] (100V)	Input Power [W] (132V)																																																								
0.00	1.53	1.86	2.60																																																								
0.15	3.76	4.03	4.67																																																								
0.30	5.90	6.13	6.69																																																								
0.45	8.07	8.28	8.80																																																								
0.60	10.19	10.39	10.87																																																								
0.75	12.41	12.56	13.01																																																								
0.90	14.60	14.72	15.09																																																								
0.99	15.98	16.05	16.40																																																								
—	—	—	—																																																								
—	—	—	—																																																								
—	—	—	—																																																								
—	—	—	—																																																								
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>1.53</td><td>1.86</td><td>2.60</td></tr> <tr><td>0.15</td><td>3.76</td><td>4.03</td><td>4.67</td></tr> <tr><td>0.30</td><td>5.90</td><td>6.13</td><td>6.69</td></tr> <tr><td>0.45</td><td>8.07</td><td>8.28</td><td>8.80</td></tr> <tr><td>0.60</td><td>10.19</td><td>10.39</td><td>10.87</td></tr> <tr><td>0.75</td><td>12.41</td><td>12.56</td><td>13.01</td></tr> <tr><td>0.90</td><td>14.60</td><td>14.72</td><td>15.09</td></tr> <tr><td>0.99</td><td>15.98</td><td>16.05</td><td>16.40</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Load Current [A]	Input Power [W]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	1.53	1.86	2.60	0.15	3.76	4.03	4.67	0.30	5.90	6.13	6.69	0.45	8.07	8.28	8.80	0.60	10.19	10.39	10.87	0.75	12.41	12.56	13.01	0.90	14.60	14.72	15.09	0.99	15.98	16.05	16.40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
Load Current [A]	Input Power [W]																																																										
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																								
0.00	1.53	1.86	2.60																																																								
0.15	3.76	4.03	4.67																																																								
0.30	5.90	6.13	6.69																																																								
0.45	8.07	8.28	8.80																																																								
0.60	10.19	10.39	10.87																																																								
0.75	12.41	12.56	13.01																																																								
0.90	14.60	14.72	15.09																																																								
0.99	15.98	16.05	16.40																																																								
—	—	—	—																																																								
—	—	—	—																																																								
—	—	—	—																																																								
—	—	—	—																																																								


Note: Slanted line shows the range of the rated load current

(注) 斜線は定格負荷電流範囲を示す。

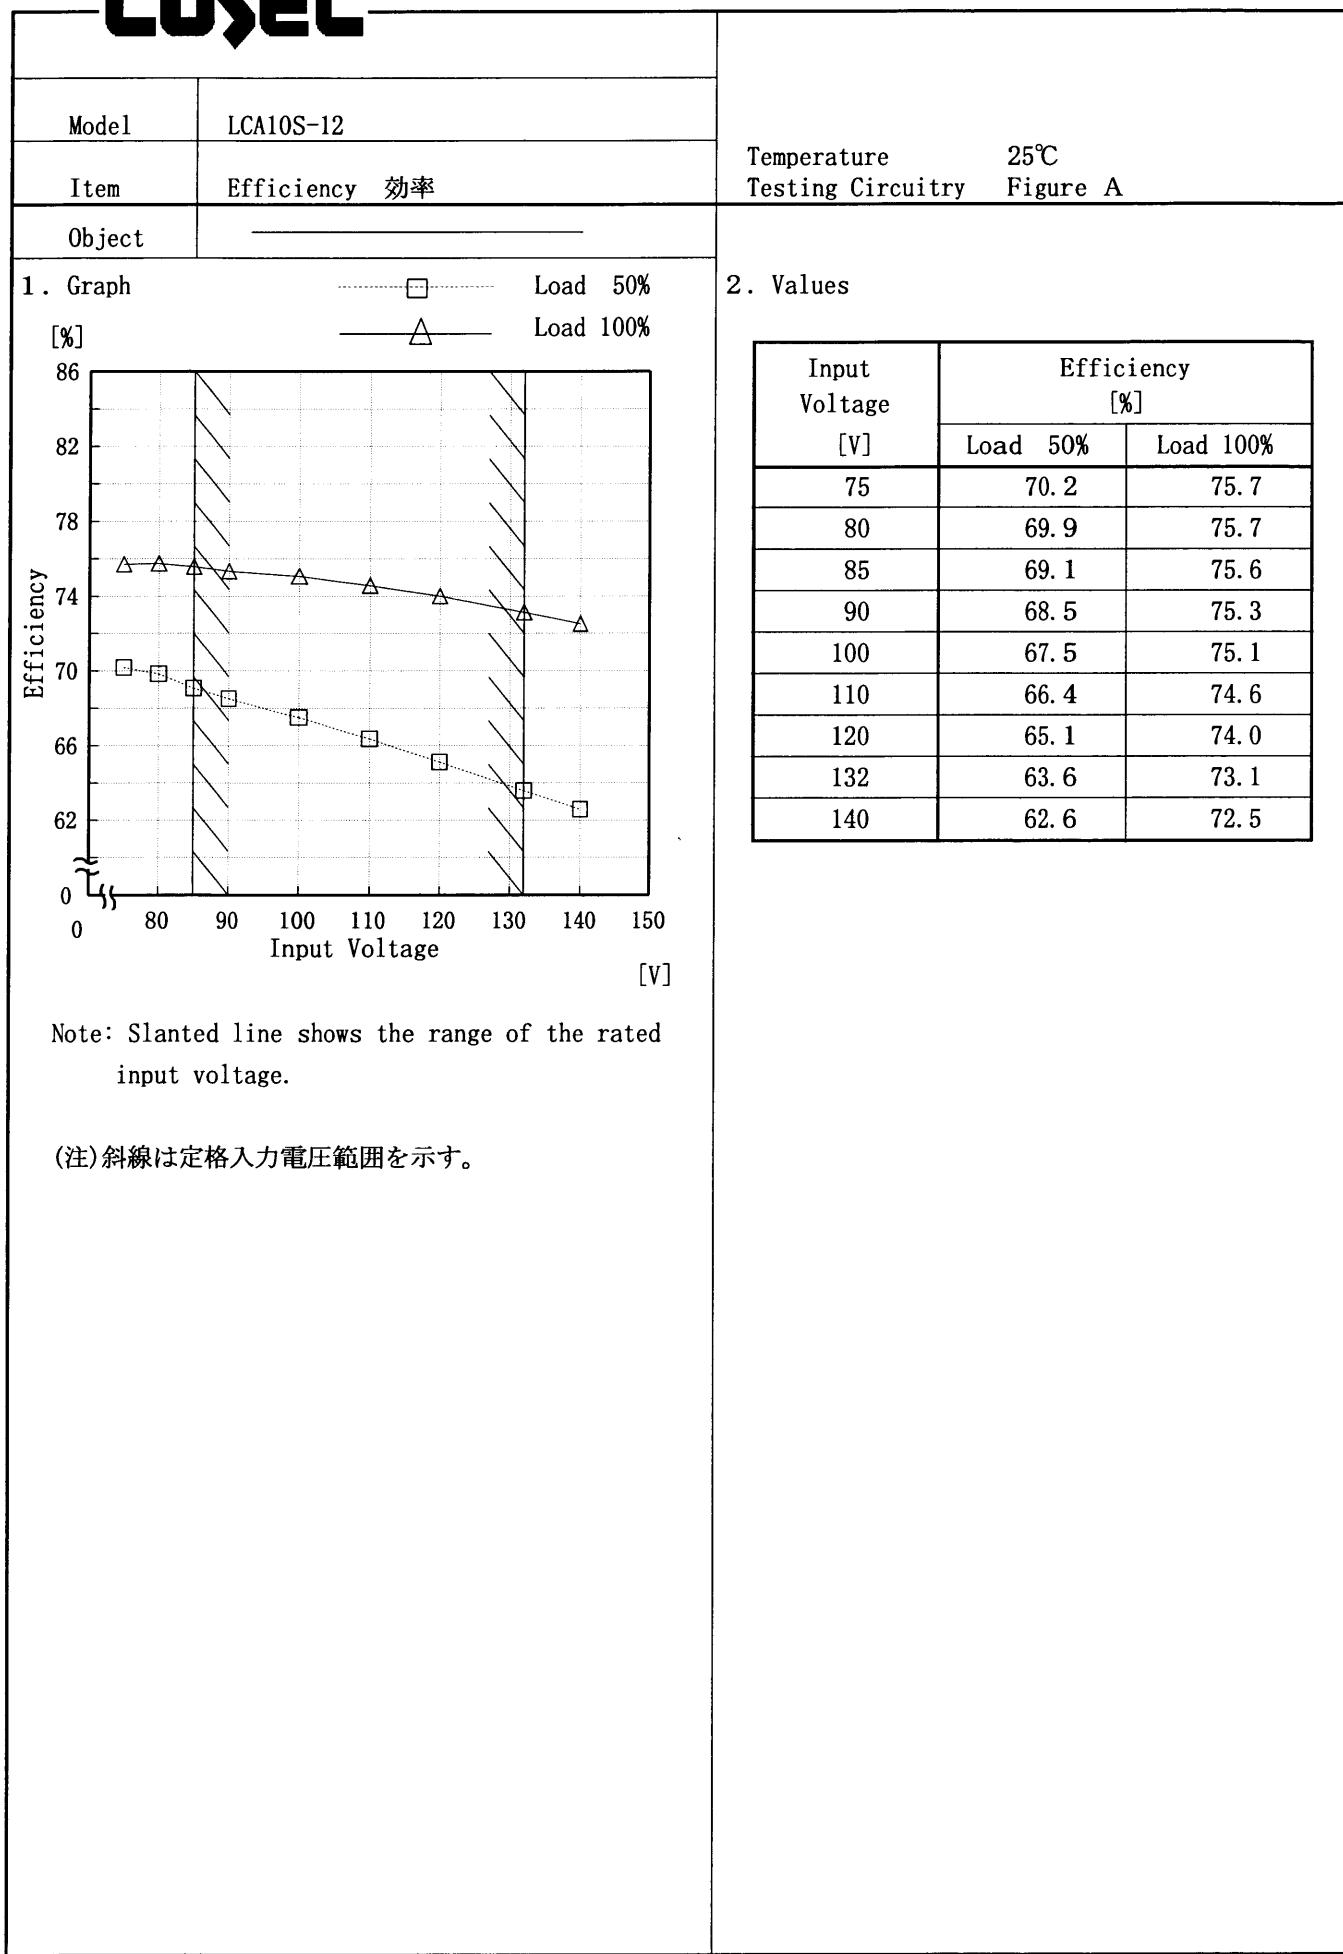**COSEL**

**COSEL**

Model	LCA10S-12
Item	Efficiency (by Load Current) 効率(負荷電流特性)
Output	—

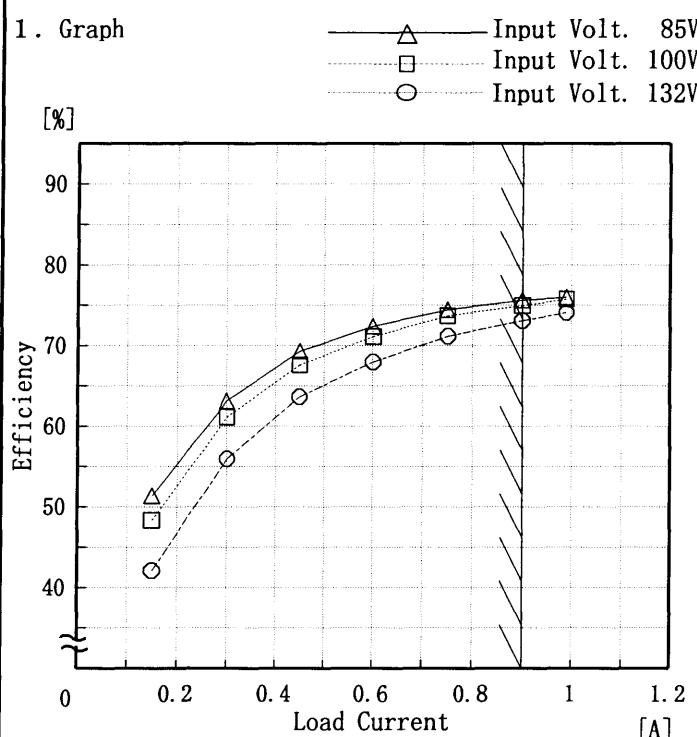

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。


Temperature 25°C  
Testing Circuitry Figure A

### 2. Values

Load Current [A]	Efficiency [%]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
0.15	51.4	48.4	42.1
0.30	63.2	61.1	56.0
0.45	69.3	67.6	63.7
0.60	72.4	71.1	68.0
0.75	74.5	73.7	71.2
0.90	75.6	75.0	73.1
0.99	76.0	75.8	74.1
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

**COSEL**

Model	LCA10S-12		Temperature Testing Circuitry	25°C Figure A
Item	Hold-Up Time 出力保持時間			
Object	+12.0V 0.9A			
1. Graph	Load 50%	Load 100%	2. Values	
[mS]	—□—	—△—		
1000				
100				
10				
1				
Hold-Up Time [mS]				
1000				
100				
10				
1				
Input Voltage [V]				
100	72	24		
110	87	30		
120	103	38		
132	125	48		
140	140	55		
Hold-Up Time [mS]	Load 50%	Load 100%		
1000	39	9		
100	45	12		
10	51	15		
1	58	17		
Input Voltage [V]	Load 50%	Load 100%		
75	39	9		
80	45	12		
85	51	15		
90	58	17		
100	72	24		
110	87	30		
120	103	38		
132	125	48		
140	140	55		

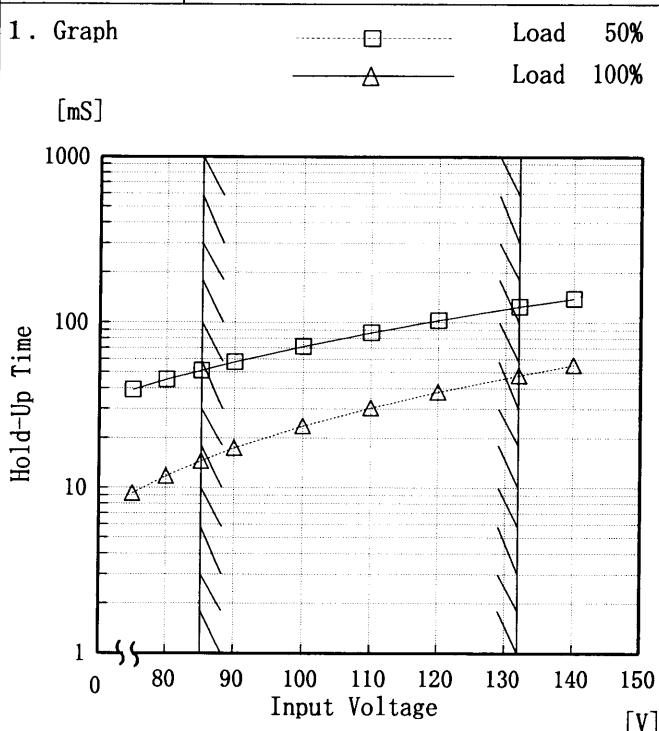

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated input voltage.

出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。

(注)斜線は定格入力電圧範囲を示す。




Model	LCA10S-12																																																				
Item	Instantaneous Interruption Compensation 瞬時停電保障																																																				
Object	+12.0V 0.9A																																																				
<b>1. Graph</b> <p>Legend: Input Volt. 85 V (open triangle), Input Volt. 100 V (open square), Input Volt. 132 V (open circle)</p>																																																					
<b>2. Values</b> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Time [mS]</th> </tr> <tr> <th>Input Volt. 85 [V]</th> <th>Input Volt. 100 [V]</th> <th>Input Volt. 132 [V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>0.15</td><td>115</td><td>157</td><td>257</td></tr> <tr><td>0.30</td><td>60</td><td>84</td><td>147</td></tr> <tr><td>0.45</td><td>39</td><td>56</td><td>103</td></tr> <tr><td>0.60</td><td>26</td><td>40</td><td>77</td></tr> <tr><td>0.75</td><td>18</td><td>30</td><td>60</td></tr> <tr><td>0.90</td><td>12</td><td>21</td><td>48</td></tr> <tr><td>0.99</td><td>5</td><td>14</td><td>40</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Time [mS]			Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]	0.00	—	—	—	0.15	115	157	257	0.30	60	84	147	0.45	39	56	103	0.60	26	40	77	0.75	18	30	60	0.90	12	21	48	0.99	5	14	40	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Time [mS]																																																				
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]																																																		
0.00	—	—	—																																																		
0.15	115	157	257																																																		
0.30	60	84	147																																																		
0.45	39	56	103																																																		
0.60	26	40	77																																																		
0.75	18	30	60																																																		
0.90	12	21	48																																																		
0.99	5	14	40																																																		
—	—	—	—																																																		
—	—	—	—																																																		
—	—	—	—																																																		

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated load current.

瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。  
(注)斜線は定格負荷電流範囲を示す。

**COSEL**

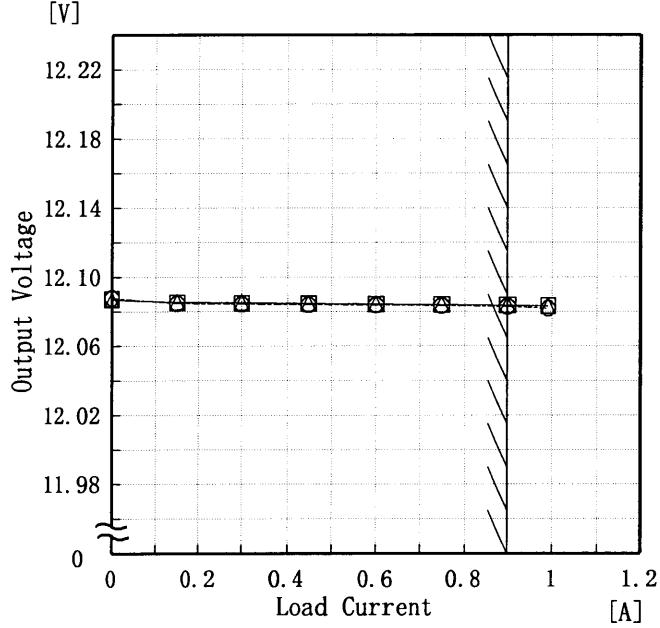Model	LCA10S-12																																																	
Item	Load Regulation 靜的負荷変動	Temperature Testing Circuitry	25°C Figure A																																															
Object	+12.0V 0.9A																																																	
1. Graph	<p>—△— Input Volt. 85 V        -□- Input Volt. 100 V        -○- Input Volt. 132 V</p> 																																																	
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>12.087</td><td>12.087</td><td>12.088</td></tr> <tr><td>0.15</td><td>12.085</td><td>12.085</td><td>12.085</td></tr> <tr><td>0.30</td><td>12.085</td><td>12.085</td><td>12.084</td></tr> <tr><td>0.45</td><td>12.085</td><td>12.085</td><td>12.084</td></tr> <tr><td>0.60</td><td>12.084</td><td>12.084</td><td>12.084</td></tr> <tr><td>0.75</td><td>12.084</td><td>12.084</td><td>12.084</td></tr> <tr><td>0.90</td><td>12.084</td><td>12.084</td><td>12.083</td></tr> <tr><td>0.99</td><td>12.083</td><td>12.083</td><td>12.082</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Output Voltage [V]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	12.087	12.087	12.088	0.15	12.085	12.085	12.085	0.30	12.085	12.085	12.084	0.45	12.085	12.085	12.084	0.60	12.084	12.084	12.084	0.75	12.084	12.084	12.084	0.90	12.084	12.084	12.083	0.99	12.083	12.083	12.082	—	—	—	—	—	—	—	—
Load Current [A]	Output Voltage [V]																																																	
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																															
0.00	12.087	12.087	12.088																																															
0.15	12.085	12.085	12.085																																															
0.30	12.085	12.085	12.084																																															
0.45	12.085	12.085	12.084																																															
0.60	12.084	12.084	12.084																																															
0.75	12.084	12.084	12.084																																															
0.90	12.084	12.084	12.083																																															
0.99	12.083	12.083	12.082																																															
—	—	—	—																																															
—	—	—	—																																															
Note:	Slanted line shows the range of the rated load current.																																																	
(注)	斜線は定格負荷電流範囲を示す。																																																	

COSEL

Model	LCA10S-12	Temperature Testing Circuitry 25°C Figure A																																						
Item	Ripple Voltage (by Load Current) リップル電圧(負荷電流特性)																																							
Object	+12.0V 0.9A																																							
1. Graph	<p style="text-align: center;">-----□----- Input Volt. 85V [mV]                    -----△----- Input Volt. 132V</p>	2. Values																																						
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 85 [V]</th> <th>Input Volt. 132 [V]</th> </tr> <tr> <th>Ripple Output Volt. [mV]</th> <th>Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>10</td><td>10</td></tr> <tr><td>0.10</td><td>10</td><td>10</td></tr> <tr><td>0.20</td><td>10</td><td>10</td></tr> <tr><td>0.30</td><td>10</td><td>10</td></tr> <tr><td>0.40</td><td>10</td><td>10</td></tr> <tr><td>0.50</td><td>10</td><td>15</td></tr> <tr><td>0.60</td><td>15</td><td>15</td></tr> <tr><td>0.70</td><td>15</td><td>15</td></tr> <tr><td>0.80</td><td>25</td><td>15</td></tr> <tr><td>0.90</td><td>30</td><td>20</td></tr> <tr><td>0.99</td><td>50</td><td>20</td></tr> </tbody> </table>	Load Current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.00	10	10	0.10	10	10	0.20	10	10	0.30	10	10	0.40	10	10	0.50	10	15	0.60	15	15	0.70	15	15	0.80	25	15	0.90	30	20	0.99	50	20
Load Current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]																																						
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																						
0.00	10	10																																						
0.10	10	10																																						
0.20	10	10																																						
0.30	10	10																																						
0.40	10	10																																						
0.50	10	15																																						
0.60	15	15																																						
0.70	15	15																																						
0.80	25	15																																						
0.90	30	20																																						
0.99	50	20																																						
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p>																																								
<p>リップル電圧は、下図 p - p 値で示される。 (注)斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line T2: Due to Switching</p>																																								
<p>Ripple [mVp-p]</p> <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																								

COSEL

Model	LCA10S-12	Temperature Testing Circuitry	25°C Figure A																																						
Item	Ripple-Noise リップルノイズ																																								
Object	+12.0V 0.9A																																								
1. Graph	<p>-----□----- Input Volt. 85V        [mV] -----△----- Input Volt. 132V</p>																																								
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load current [A]</th> <th>Input Volt. 85 [V]</th> <th>Input Volt. 132 [V]</th> </tr> <tr> <th>Ripple-Noise [mV]</th> <th>Ripple-Noise [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>15</td><td>15</td></tr> <tr><td>0.10</td><td>15</td><td>15</td></tr> <tr><td>0.20</td><td>15</td><td>15</td></tr> <tr><td>0.30</td><td>15</td><td>15</td></tr> <tr><td>0.40</td><td>15</td><td>15</td></tr> <tr><td>0.50</td><td>20</td><td>20</td></tr> <tr><td>0.60</td><td>20</td><td>20</td></tr> <tr><td>0.70</td><td>25</td><td>20</td></tr> <tr><td>0.80</td><td>35</td><td>20</td></tr> <tr><td>0.90</td><td>40</td><td>20</td></tr> <tr><td>0.99</td><td>70</td><td>30</td></tr> </tbody> </table>			Load current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.00	15	15	0.10	15	15	0.20	15	15	0.30	15	15	0.40	15	15	0.50	20	20	0.60	20	20	0.70	25	20	0.80	35	20	0.90	40	20	0.99	70	30
Load current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]																																							
	Ripple-Noise [mV]	Ripple-Noise [mV]																																							
0.00	15	15																																							
0.10	15	15																																							
0.20	15	15																																							
0.30	15	15																																							
0.40	15	15																																							
0.50	20	20																																							
0.60	20	20																																							
0.70	25	20																																							
0.80	35	20																																							
0.90	40	20																																							
0.99	70	30																																							
<p>Ripple-Noise is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図 p - p 値で示される。</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>																																									
<p>T1: Due to AC Input Line T2: Due to Switching</p>																																									
<p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																									

**COSEL**


Model	LCA10S-12	Temperature 25°C Testing Circuitry Figure A																																																									
Item	Overcurrent Protection 過電流保護																																																										
Object	+12.0V 0.9A																																																										
1. Graph	<p>[V]</p> <p>Output Voltage [V]</p> <p>Load Current [A]</p>	2. Values																																																									
		<table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>12.00</td><td>1.14</td><td>1.21</td><td>1.01</td></tr> <tr><td>11.40</td><td>1.13</td><td>1.20</td><td>1.00</td></tr> <tr><td>10.80</td><td>1.13</td><td>1.20</td><td>0.99</td></tr> <tr><td>9.60</td><td>1.10</td><td>1.17</td><td>0.95</td></tr> <tr><td>8.40</td><td>1.06</td><td>1.13</td><td>0.92</td></tr> <tr><td>7.20</td><td>1.02</td><td>1.09</td><td>0.88</td></tr> <tr><td>6.00</td><td>0.96</td><td>1.03</td><td>0.83</td></tr> <tr><td>4.80</td><td>0.90</td><td>0.96</td><td>0.78</td></tr> <tr><td>3.60</td><td>0.82</td><td>0.87</td><td>0.73</td></tr> <tr><td>2.40</td><td>0.73</td><td>0.78</td><td>0.67</td></tr> <tr><td>1.20</td><td>0.64</td><td>0.68</td><td>0.61</td></tr> <tr><td>0.00</td><td>0.53</td><td>0.57</td><td>0.55</td></tr> </tbody> </table>			Output Voltage [V]	Load Current [A]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	12.00	1.14	1.21	1.01	11.40	1.13	1.20	1.00	10.80	1.13	1.20	0.99	9.60	1.10	1.17	0.95	8.40	1.06	1.13	0.92	7.20	1.02	1.09	0.88	6.00	0.96	1.03	0.83	4.80	0.90	0.96	0.78	3.60	0.82	0.87	0.73	2.40	0.73	0.78	0.67	1.20	0.64	0.68	0.61	0.00	0.53	0.57	0.55
Output Voltage [V]	Load Current [A]																																																										
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																								
12.00	1.14	1.21	1.01																																																								
11.40	1.13	1.20	1.00																																																								
10.80	1.13	1.20	0.99																																																								
9.60	1.10	1.17	0.95																																																								
8.40	1.06	1.13	0.92																																																								
7.20	1.02	1.09	0.88																																																								
6.00	0.96	1.03	0.83																																																								
4.80	0.90	0.96	0.78																																																								
3.60	0.82	0.87	0.73																																																								
2.40	0.73	0.78	0.67																																																								
1.20	0.64	0.68	0.61																																																								
0.00	0.53	0.57	0.55																																																								

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。


**COSEL**

Model	LCA10S-12	Temperature Testing Circuitry	25°C
Item	Inrush Current 突入電流		Figure A
Object			

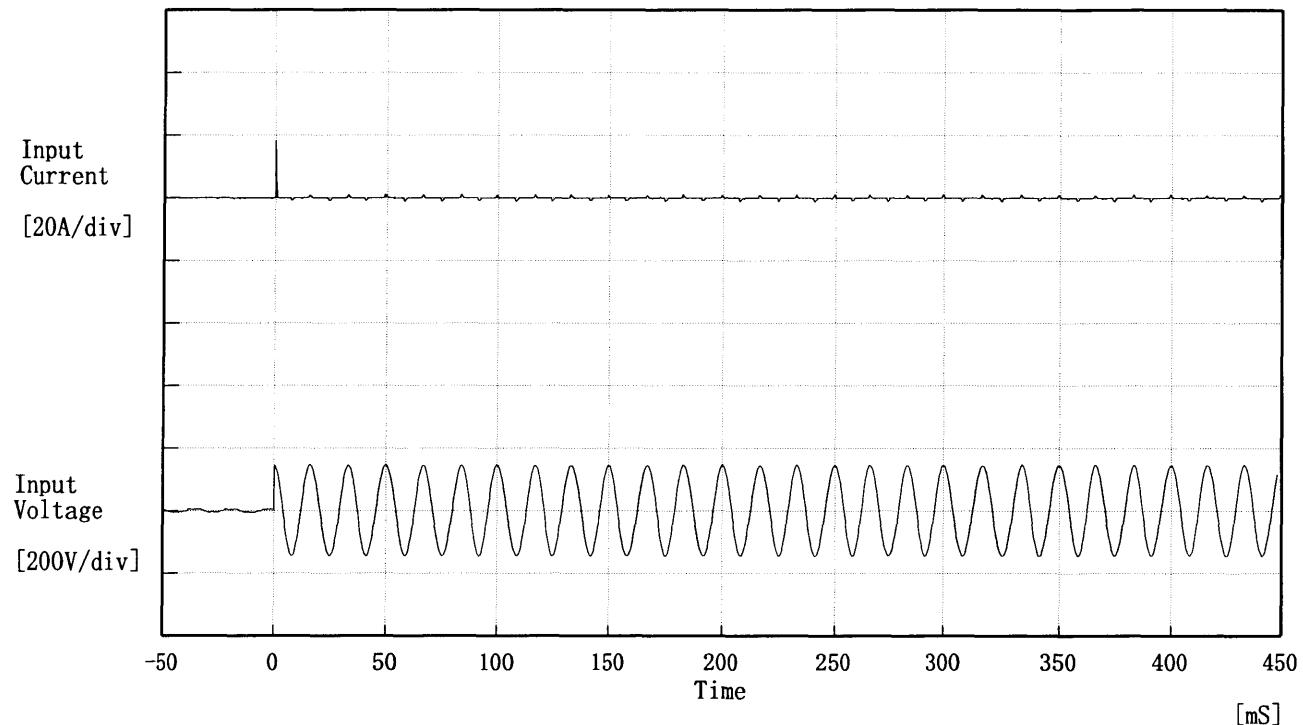

Input Voltage 100 V  
 Frequency 60 Hz  
 Load 100 %  
 Inrush Current

- ① 18.41 [A]
- ② 1.21 [A]

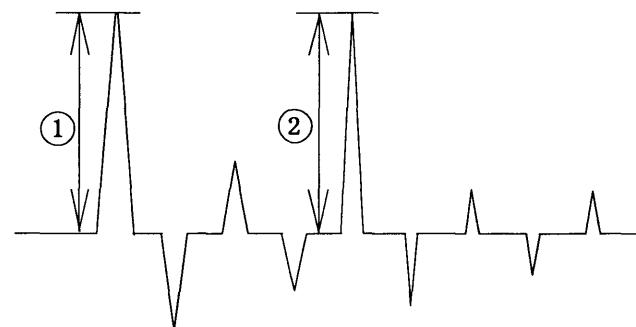


**COSEL**

Model	LCA10S-12	Temperature	25°C
Item	Dynamic Load Response 動的負荷変動	Testing Circuitry	Figure A
Object	+12.0V 0.9A		



Input Volt. 100 V

Cycle 1000 mS





Load 0% ↔

Load 100 %

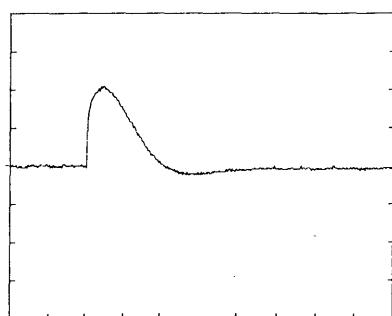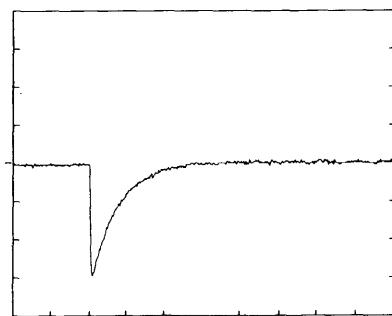

Load 0% ↔

Load 50 %

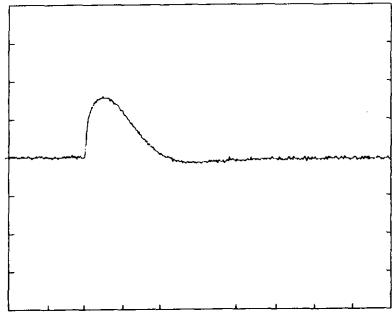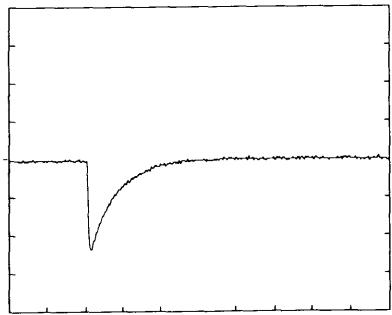



200 mV/div

10 mS/div

**COSEL**


Model	LCA10S-12	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+12.0V 0.9A		

## 1. Graph

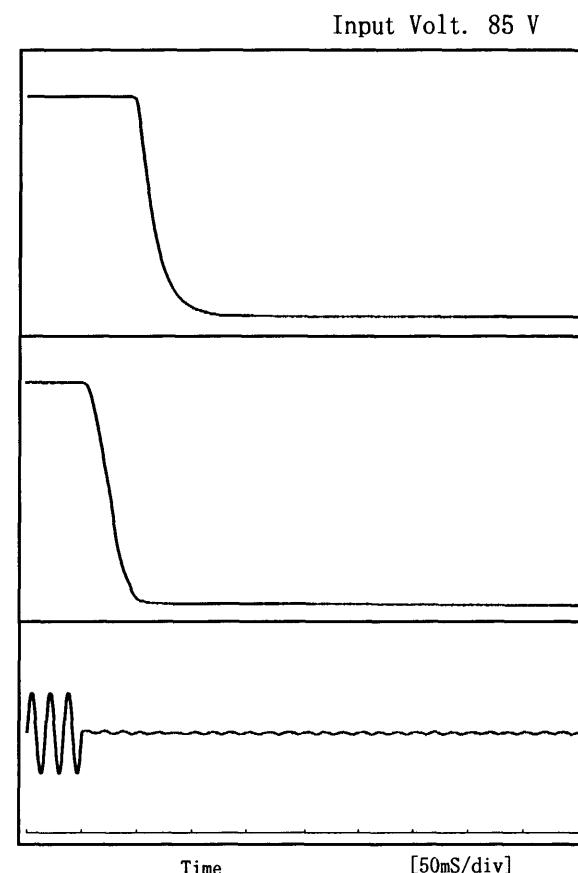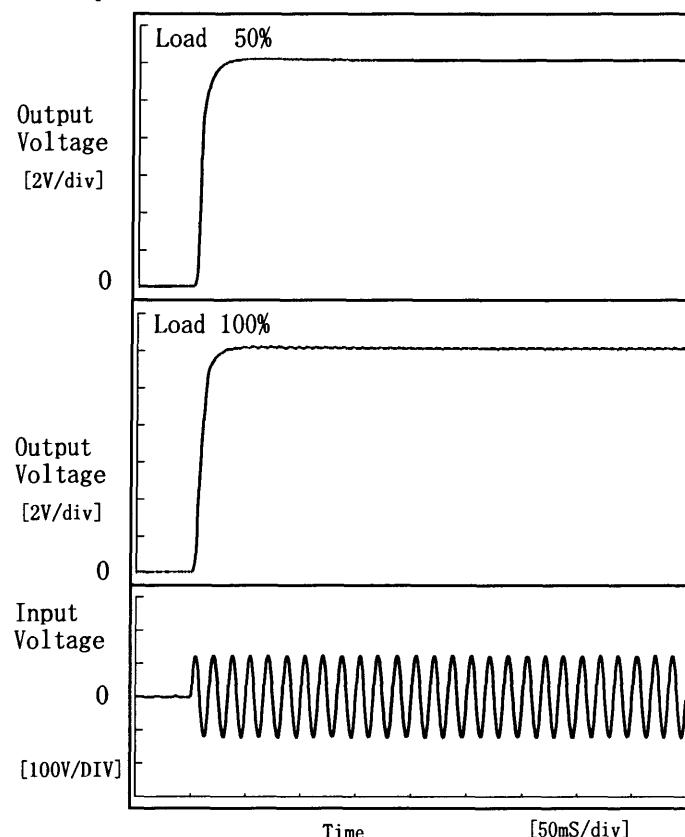

## 2. Values

Load	Time	T <sub>d</sub>	T <sub>r</sub>	T <sub>s</sub>	T <sub>h</sub>	T <sub>f</sub>	[mS]
50 %		4.0	11.3	15.3	52.3	40.3	
100 %		4.0	11.5	15.5	12.0	33.3	

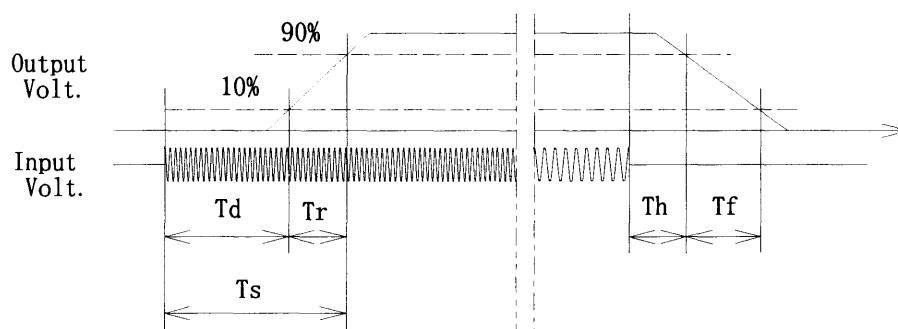


**COSSEL**

Model LCA10S-12

Item Ambient Temperature Drift  
周囲温度変動

Object +12.0V 0.9A

1. Graph
- △— Input Volt. 85V
  - Input Volt. 100V
  - Input Volt. 132V

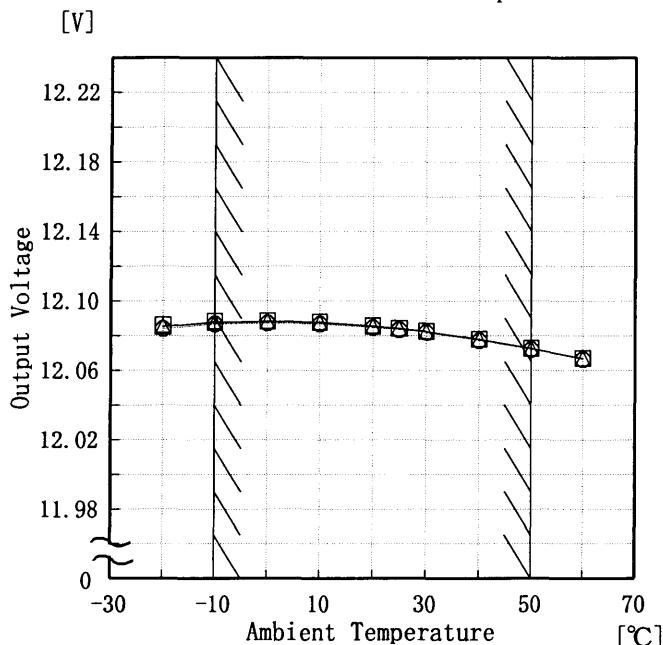

Load 100%

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A


## 2. Values

Temperature [°C]	Output Voltage [V]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
-20	12.085	12.086	12.084
-10	12.088	12.088	12.087
0	12.088	12.089	12.087
10	12.088	12.088	12.087
20	12.085	12.086	12.085
25	12.084	12.084	12.083
30	12.082	12.083	12.082
40	12.078	12.078	12.077
50	12.073	12.073	12.072
60	12.067	12.067	12.066
—	—	—	—

**COSEL**

Model	LCA10S-12
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧
Object	+12.0V 0.9A

## 1. Graph

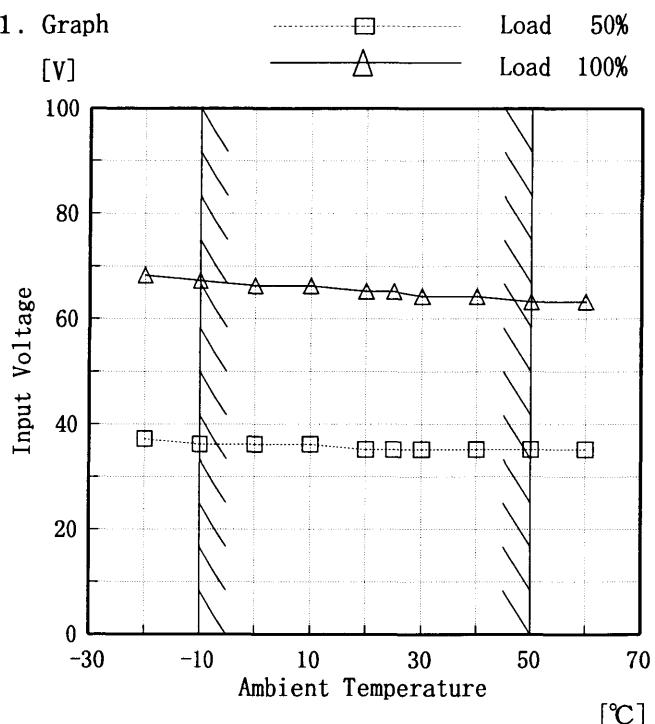

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A

## 2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-20	37	68
-10	36	67
0	36	66
10	36	66
20	35	65
25	35	65
30	35	64
40	35	64
50	35	63
60	35	63
—	—	—

**COSEL**

Model	LCA10S-12			
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)			
Object	+12.0V 0.9A			
1. Graph				
<p>Graph showing Ripple Voltage [mV] vs Ambient Temperature [°C]. The Y-axis ranges from 0 to 150 mV, and the X-axis ranges from -30 to 70 °C. Two sets of curves are shown: Load 50% (dashed line with square markers) and Load 100% (solid line with triangle markers). A slanted line indicates the rated ambient temperature range from -10°C to 50°C.</p>				
<p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注)斜線は定格周囲温度範囲を示す。</p>				

Testing Circuitry Figure A

## 2. Values


Ambient Temp. [°C]	Load 50%	Load 100%
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
-20	40	120
-10	25	80
0	20	50
10	15	30
20	15	20
25	15	20
30	10	20
40	10	20
50	10	20
60	10	15
—	—	—

**COSEL**

Model	LCA10S-12
Item	Time Lapse Drift 経時ドリフト
Object	+12.0V 0.9A

## 1. Graph

[V]

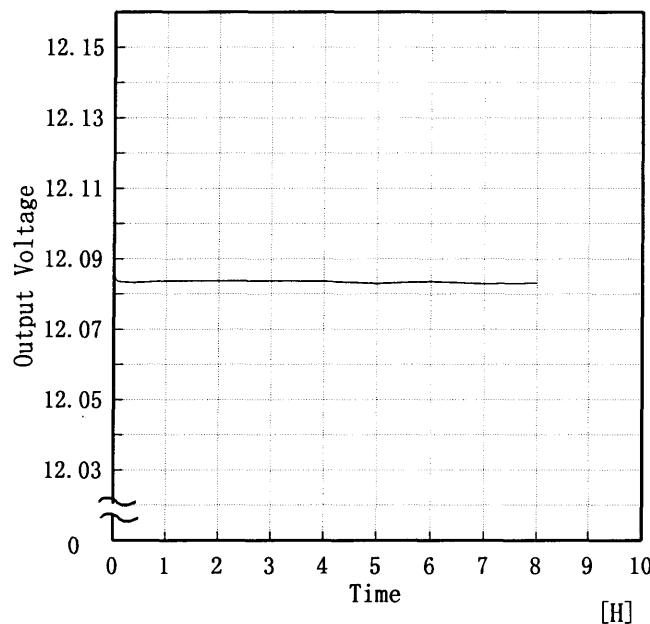

Input Volt. 100V

Load 100%

Temperature 25°C  
 Testing Circuitry Figure A

## 2. Values

Time since start [H]	Output Voltage [V]
0.0	12.086
0.5	12.083
1.0	12.084
2.0	12.084
3.0	12.084
4.0	12.084
5.0	12.083
6.0	12.084
7.0	12.083
8.0	12.083



Model	LCA10S-12	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+12.0V 0.9A	

#### Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature -10~50 °C

Input Voltage : 85~132 V

Load Current : 0~0.9 A

\* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage) / 2

$$* \text{Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

#### 定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 85~132 V

負荷電流 0~0.9 A

\* 定電圧精度(変動値) = ±(出力電圧の最高値-出力電圧の最低値) / 2

$$* \text{定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ration) [%]
Maximum Voltage	-10	132	0.0	12.092	±11	±0.1
Minimum Voltage	50	132	0.9	12.072		



Model	LCA10S-12		
Item	Condensation 結露特性	Testing Circuitry	Figure A
Object	+12.0V 0.9A		

### 1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

### 1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

### 2. Values

Item	Data	Testing Conditions
Output Voltage [V]	12.083	Input Volt.:100V, Load Current:0.9A
Line Regulation [mV]	3	Input Volt.:85~132V, Load Current:0.9A
Load Regulation [mV]	7	Input Volt.:100V, Load Current:0~0.9A



Model	LCA10S-12	Temperature	25°C
Item	Leakage Current 漏洩電流	Testing Circuitry	Figure B
Object	_____		

### 1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	0.07	0.09	0.10
(B) IEC60950	0.07	0.09	0.11

### 2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力の両相について測定し、その大きい方を漏洩電流測定値とする。

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	—	—	—



Model	LCA10S-12	Temperature Testing Circuitry 25°C Figure C
Item	Line Noise Tolerance 入力雑音耐量	
Object	+12.0V 0.9A	

### 1. Results

Pulse Width [ nS ]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

### 2. Conditions

Input Voltage : 100 V  
 Pulse Voltage : 2000 V  
 Pulse Cycle : 10 mS  
 Pulse Input Duration : 1 min. or more  
 Load : 100 %

COSEL

Model	LCA10S-12	Temperature Testing Circuitry	25°C Figure D
Item	Conducted Emission 雜音端子電圧		
Object			

## 1. Graph

## Remarks


Input Volt. 100 V (VCCI Class B)

120 V (FCC Class B)


Load 100 %

規格1: [VCCI] Class B(平均値)

規格2: [VCCI] Class B(QP)

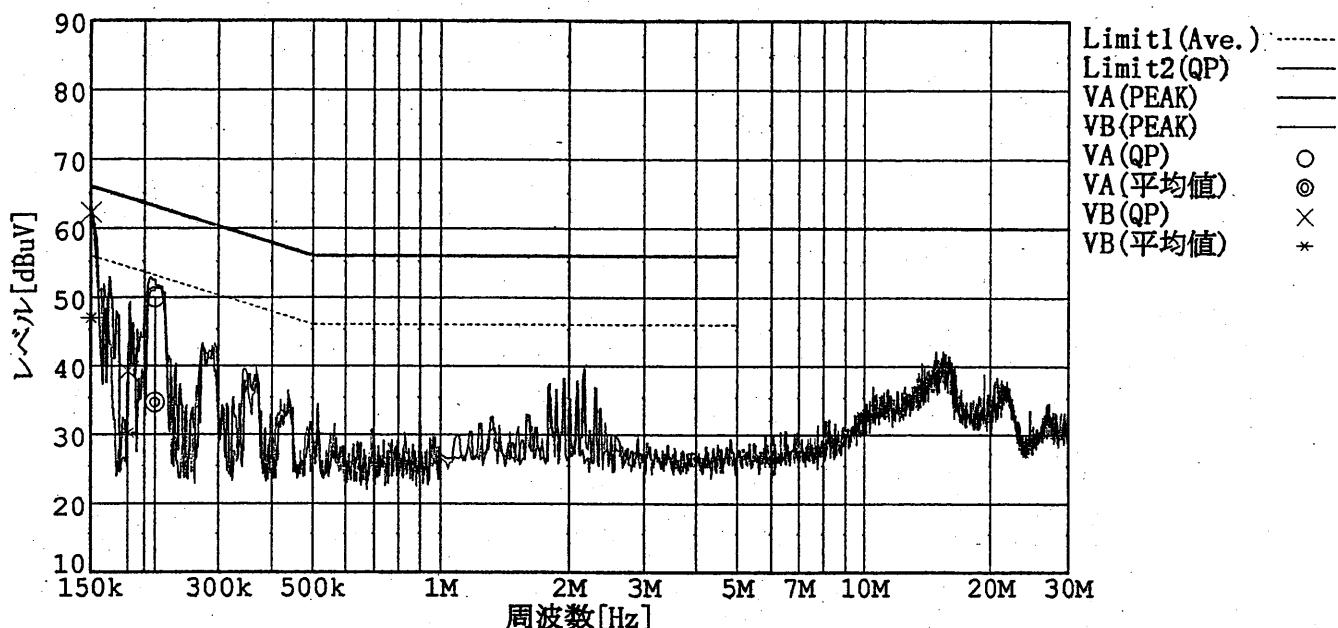

規格2: [FCC Part15] Class B

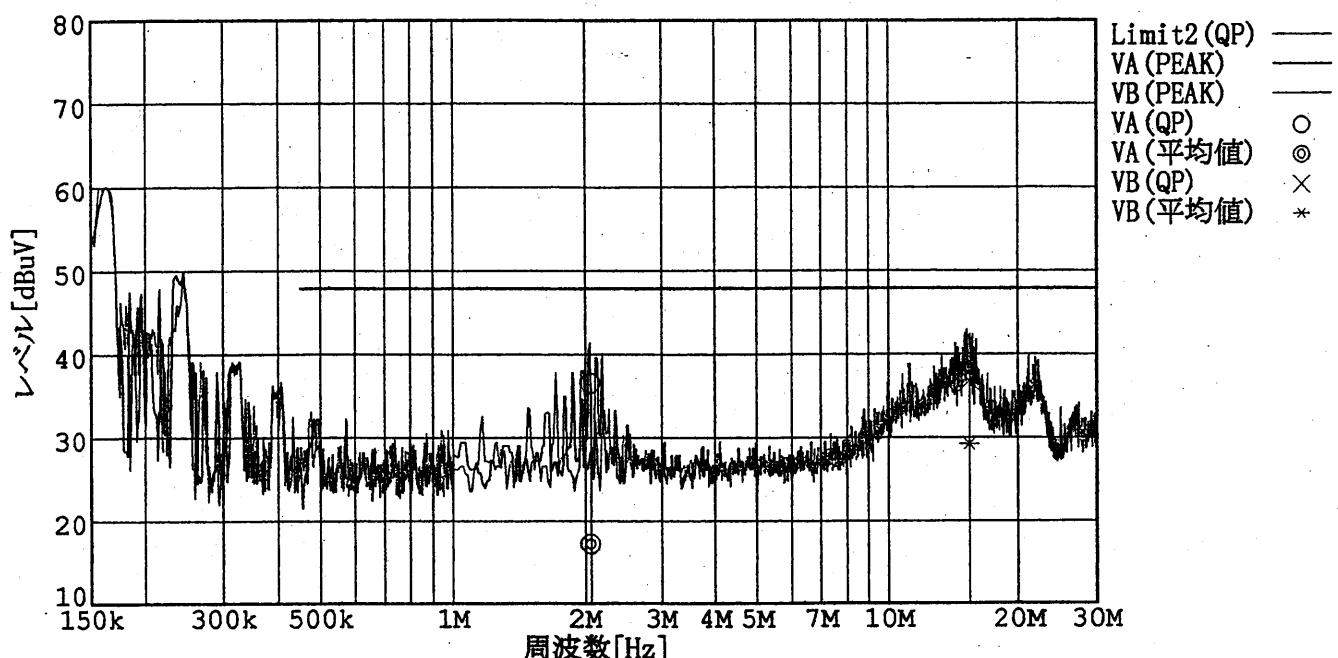

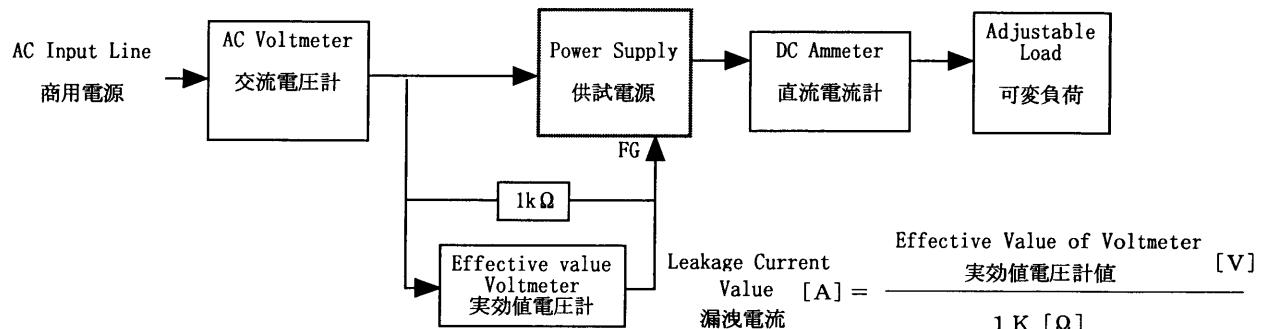
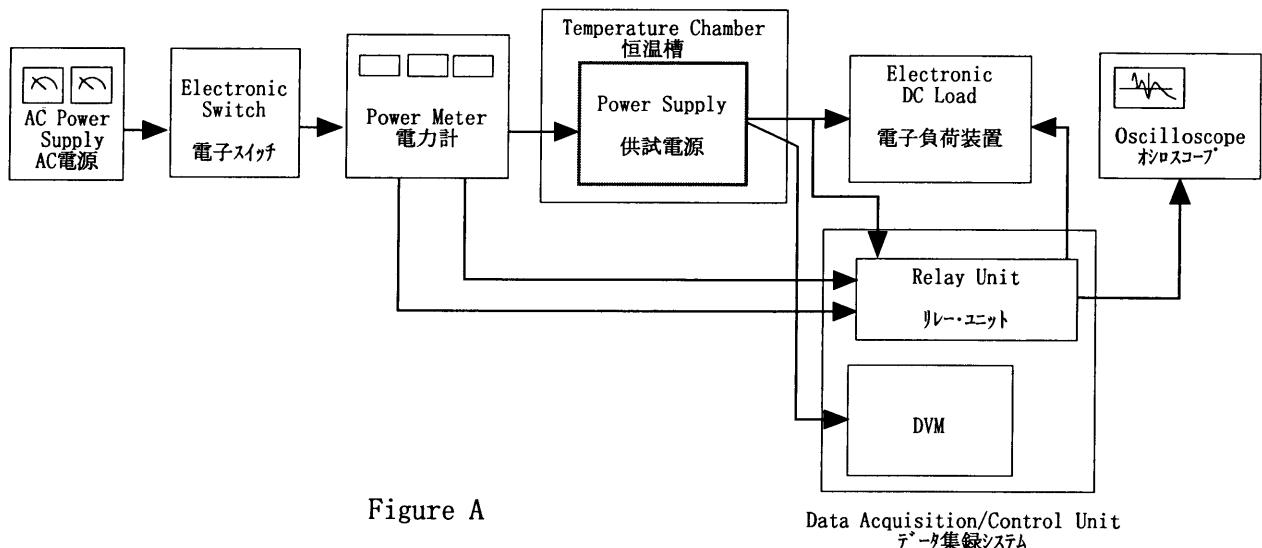


Figure B (DENTORI)

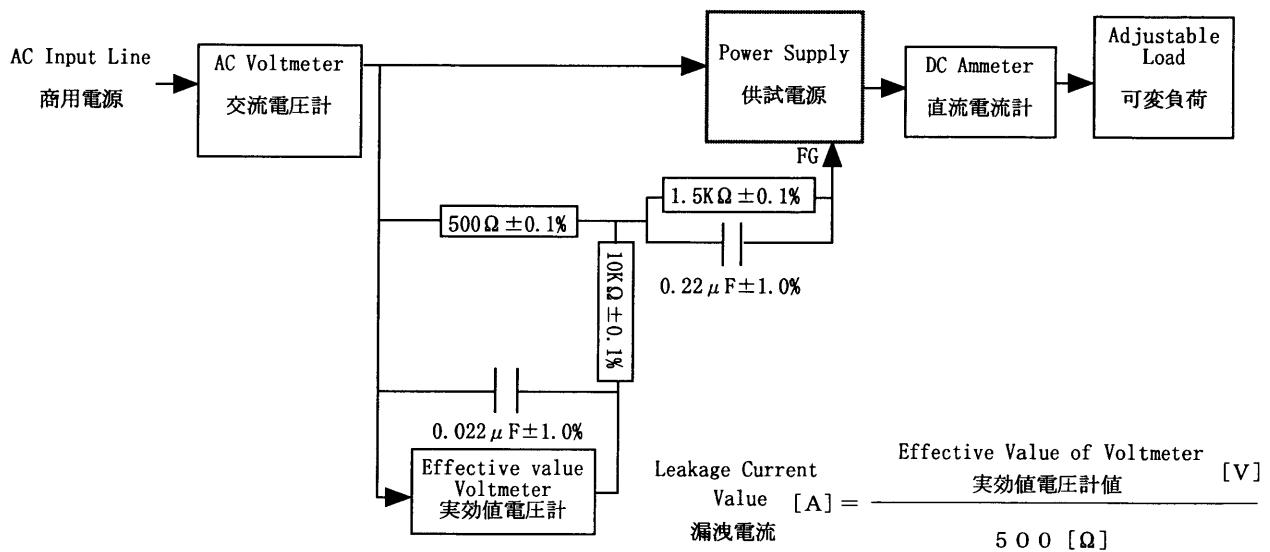


Figure B (IEC 60950)

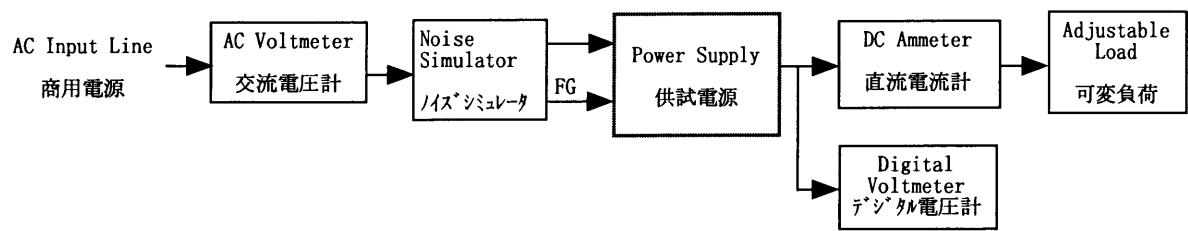


Figure C

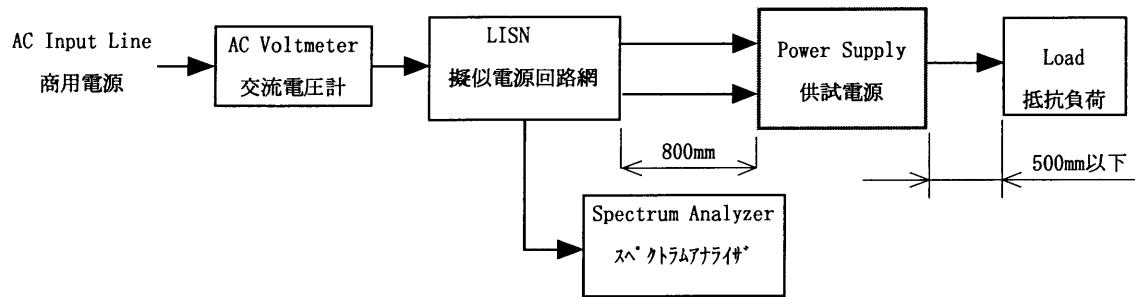


Figure D

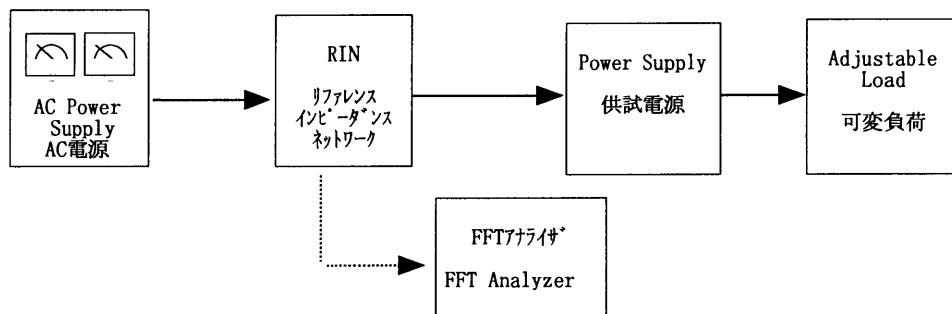


Figure E