



TEST DATA OF LCA30S-36

(100V INPUT)

Regulated DC Power Supply

Jan. 16, 2001

Approved by : *H. Shibutani*
Design Manager

Prepared by : *Jun Uchida*
Design Engineer

コーセル株式会社
COSEL CO., LTD.

C O N T E N T S

| | |
|--|----|
| 1. Line Regulation | 1 |
| 静的入力変動 | |
| 2. Input Current (by Load Current) | 2 |
| 入力電流 (負荷特性) | |
| 3. Input Power (by Load Current) | 3 |
| 入力電力 (負荷特性) | |
| 4. Efficiency (by Input Voltage) | 4 |
| 効率 (入力電圧特性) | |
| 5. Efficiency (by Load Current) | 5 |
| 効率 (負荷特性) | |
| 6. Hold-Up Time | 6 |
| 出力保持時間 | |
| 7. Instantaneous Interruption Compensation | 7 |
| 瞬時停電保障 | |
| 8. Load Regulation | 8 |
| 静的負荷変動 | |
| 9. Ripple Voltage (by Load Current) | 9 |
| リップル電圧 (負荷特性) | |
| 10. Ripple-Noise | 10 |
| リップルノイズ | |
| 11. Overcurrent Protection | 11 |
| 過電流保護 | |
| 12. Inrush Current | 12 |
| 突入電流 | |
| 13. Dynamic Load Responce | 13 |
| 動的負荷変動 | |
| 14. Rise and Fall Time | 14 |
| 立上り、立下り時間 | |
| 15. Ambient Temperature Drift | 15 |
| 周囲温度変動 | |
| 16. Minimum Input Voltage for Regulated Output Voltage | 16 |
| 最低レギュレーション電圧 | |
| 17. Ripple Voltage (by Ambient Temperature) | 17 |
| リップル電圧 (周囲温度特性) | |
| 18. Time Lapse Drift | 18 |
| 経時ドリフト | |
| 19. Output Voltage Accuracy | 19 |
| 定電圧精度 | |
| 20. Condensation | 20 |
| 結露特性 | |
| 21. Leakage Current | 21 |
| 漏洩電流 | |
| 22. Line Noise Tolerance | 22 |
| 入力雑音耐量 | |
| 23. Conducted Emission | 23 |
| 雑音端子電圧 | |
| 24. Figure of Testing Circuitry | 24 |
| 測定回路図 | |

(Final Page 25)

COSEL

| | | | |
|--------|--|---------------------------|---|
| Model | | LCA30S-36 | Temperature 25℃ Testing Circuitry Figure A |
| Item | | Line Regulation 静の入力変動 | |
| Object | | +36.0V0.9A | |

1. Graph

□-----

Load 50%

△-----

Load 100%

Output Voltage
[V]

COSEL

| | | | | | | | |
|----------|--|---|--|-------------------|--|----------|--|
| Model | | LCA30S-36 | | Temperature | | 25℃ | |
| Item | | Input Current (by Load Current) 入力電流（負荷特性） | | Testing Circuitry | | Figure A | |
| Object | | | | | | | |
| 1. Graph | | | | 2. Values | | | |

△

—

Input Volt. 85V

□

—

Input Volt. 100V

○

—

Input Volt. 132V

[A]

1

0.8

0.6

0.4

0.2

0

0

0.2

0.4

0.6

0.8

1

1.2

Input Current

Load Current

[A]

[A]

Note: Slanted line shows the range of the rated load current.


(注) 斜線は定格負荷電流範囲を示す。

| Load Current [A] | Input Current [A] | | |
|---------------------|----------------------|-----------------------|-----------------------|
| | Input Volt. 85[V] | Input Volt. 100[V] | Input Volt. 132[V] |
| 0.000 | 0.085 | 0.089 | 0.072 |
| 0.150 | 0.209 | 0.197 | 0.186 |
| 0.300 | 0.327 | 0.301 | 0.267 |
| 0.450 | 0.442 | 0.401 | 0.347 |
| 0.600 | 0.559 | 0.501 | 0.425 |
| 0.750 | 0.674 | 0.601 | 0.502 |
| 0.900 | 0.791 | 0.701 | 0.580 |
| 0.990 | 0.863 | 0.756 | 0.622 |
| — | — | — | — |
| — | — | — | — |
| — | — | — | — |
| — | — | — | — |

COSEL

| Model | | LCA30S-36 | | Temperature | | 25℃ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--------------------|---|---------------------|---|--|----------|--|------------------|-----------------|--|--|--------------------|---------------------|---------------------|-------|------|------|------|-------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Item | | Input Power (by Load Current) 入力電力（負荷特性） | | Testing Circuitry | | Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1. Graph | | | | 2. Values | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div><div><div>△</div>Input Volt. 85V</div><div><div>□</div>Input Volt. 100V</div><div><div>○</div>Input Volt. 132V</div></div> <div><div><div><div>Input Power [W]</div><div>50</div><div>40</div><div>30</div><div>20</div><div>10</div><div>0</div></div><div><div>0</div><div>0.2</div><div>0.4</div><div>0.6</div><div>0.8</div><div>1</div><div>1.2</div></div><div><div>Load Current [A]</div></div></div></div> | | | | <table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Power [W]</th></tr><tr><th>Input Volt. 85 [V]</th><th>Input Volt. 100 [V]</th><th>Input Volt. 132 [V]</th></tr><tr><td>0.000</td><td>3.37</td><td>4.08</td><td>3.89</td></tr><tr><td>0.150</td><td>9.53</td><td>10.19</td><td>11.94</td></tr><tr><td>0.300</td><td>15.63</td><td>16.30</td><td>17.86</td></tr><tr><td>0.450</td><td>21.73</td><td>22.26</td><td>23.83</td></tr><tr><td>0.600</td><td>27.98</td><td>28.39</td><td>29.72</td></tr><tr><td>0.750</td><td>34.29</td><td>34.52</td><td>35.62</td></tr><tr><td>0.900</td><td>40.84</td><td>40.90</td><td>41.76</td></tr><tr><td>0.990</td><td>44.97</td><td>45.03</td><td>45.70</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table> | | | | Load Current [A] | Input Power [W] | | | Input Volt. 85 [V] | Input Volt. 100 [V] | Input Volt. 132 [V] | 0.000 | 3.37 | 4.08 | 3.89 | 0.150 | 9.53 | 10.19 | 11.94 | 0.300 | 15.63 | 16.30 | 17.86 | 0.450 | 21.73 | 22.26 | 23.83 | 0.600 | 27.98 | 28.39 | 29.72 | 0.750 | 34.29 | 34.52 | 35.62 | 0.900 | 40.84 | 40.90 | 41.76 | 0.990 | 44.97 | 45.03 | 45.70 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Load Current [A] | Input Power [W] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Input Volt. 85 [V] | Input Volt. 100 [V] | Input Volt. 132 [V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.000 | 3.37 | 4.08 | 3.89 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.150 | 9.53 | 10.19 | 11.94 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.300 | 15.63 | 16.30 | 17.86 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.450 | 21.73 | 22.26 | 23.83 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.600 | 27.98 | 28.39 | 29.72 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.750 | 34.29 | 34.52 | 35.62 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.900 | 40.84 | 40.90 | 41.76 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.990 | 44.97 | 45.03 | 45.70 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div>Note: Slanted line shows the range of the rated load current.</div> <div>(注) 斜線は定格負荷電流範囲を示す。</div> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |


| | |
|-------------------|----------|
| Temperature | 25°C |
| Testing Circuitry | Figure A |

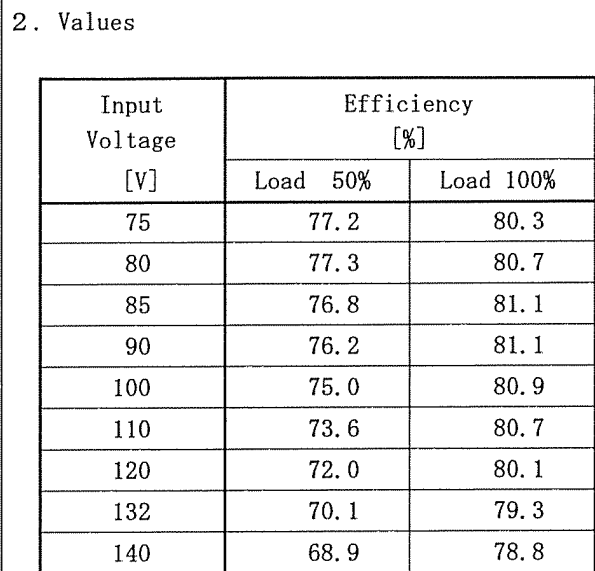

(注)斜線は定格入力電圧範囲を示す。

| | |
|-------------------|----------|
| Temperature | 25°C |
| Testing Circuitry | Figure A |

2. Values

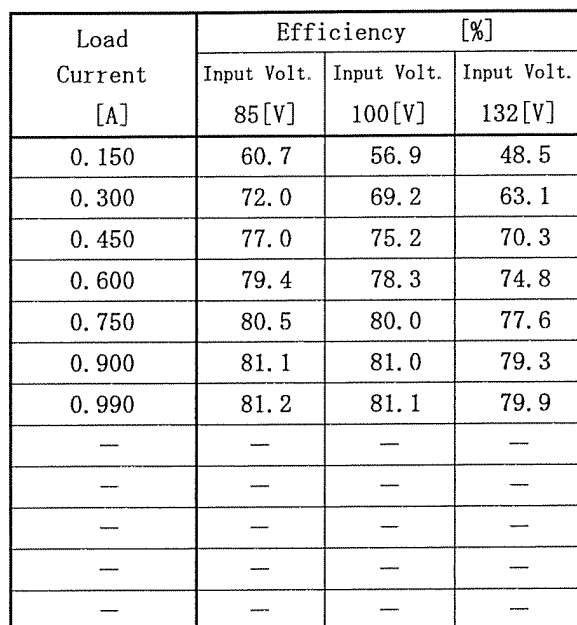

(注)斜線は定格負荷電流範囲を示す。

COSEL


| Model | | LCA30S-36 | | Temperature Testing Circuitry | 25℃ Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|----------------------|------------------------|--|---|-----------------|----------------------|----------------------|--|----------|-----------|----|----|----|----|----|----|----|----|----|----|----|----|-----|----|----|-----|----|----|-----|----|----|-----|-----|----|-----|-----|----|
| Item | | Hold-Up Time 出力保持時間 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | | +36.0V0.9A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1. Graph | | | | 2. Values | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div><div><div>-----□-----</div><div>Load 50%</div></div><div><div>-----△-----</div><div>Load 100%</div></div></div> <div><div>[mS]</div><div>1000</div><div>100</div><div>10</div><div>1</div></div> <div>Hold-Up Time</div> <div><div>70</div><div>80</div><div>90</div><div>100</div><div>110</div><div>120</div><div>130</div><div>140</div><div>150</div></div> <div>Input Voltage</div> <div>[V]</div> <div><div>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</div><div>Note: Slanted line shows the range of the rated input voltage.</div><div><div>出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。</div><div>(注)斜線は定格入力電圧範囲を示す。</div></div></div> | | | | <table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Hold-Up Time [mS]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>75</td><td>36</td><td>13</td></tr><tr><td>80</td><td>41</td><td>16</td></tr><tr><td>85</td><td>47</td><td>19</td></tr><tr><td>90</td><td>53</td><td>22</td></tr><tr><td>100</td><td>65</td><td>29</td></tr><tr><td>110</td><td>79</td><td>37</td></tr><tr><td>120</td><td>95</td><td>45</td></tr><tr><td>132</td><td>114</td><td>56</td></tr><tr><td>140</td><td>129</td><td>64</td></tr></table> | | Input Voltage [V] | Hold-Up Time [mS] | | Load 50% | Load 100% | 75 | 36 | 13 | 80 | 41 | 16 | 85 | 47 | 19 | 90 | 53 | 22 | 100 | 65 | 29 | 110 | 79 | 37 | 120 | 95 | 45 | 132 | 114 | 56 | 140 | 129 | 64 |
| Input Voltage [V] | Hold-Up Time [mS] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Load 50% | Load 100% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 75 | 36 | 13 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 80 | 41 | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 85 | 47 | 19 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 90 | 53 | 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 100 | 65 | 29 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 110 | 79 | 37 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 120 | 95 | 45 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 132 | 114 | 56 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 140 | 129 | 64 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

COSEL

| Model | | LCA30S-36 | | Temperature | | 25℃ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|-------------------|---|--------------------|---|--|----------|--|------------------|-----------|--|--|-------------------|--------------------|--------------------|------|---|---|---|------|-----|-----|-----|------|-----|-----|-----|------|----|-----|-----|------|----|----|-----|------|----|----|----|------|----|----|----|------|----|----|----|---|---|---|---|---|---|---|---|---|---|---|---|
| Item | | Instantaneous Interruption Compensation 瞬時停電保障 | | Testing Circuitry | | Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | | +36.0V0.9A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1. Graph | | | | 2. Values | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div><div><div>—△—</div><div>Input Volt. 85 V</div></div><div><div>- -□- -</div><div>Input Volt. 100 V</div></div><div><div>- -○- -</div><div>Input Volt. 132 V</div></div></div> <div><div>[mS]</div><div>1000</div><div>Instantaneous Compensation Time</div><div>100</div><div>10</div><div>1</div><div>0</div><div>0.2</div><div>0.4</div><div>0.6</div><div>0.8</div><div>1</div><div>1.2</div><div>Load Current</div><div>[A]</div></div> | | | | <table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Time [mS]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>0.00</td><td>—</td><td>—</td><td>—</td></tr><tr><td>0.15</td><td>195</td><td>231</td><td>346</td></tr><tr><td>0.30</td><td>123</td><td>152</td><td>222</td></tr><tr><td>0.45</td><td>87</td><td>106</td><td>157</td></tr><tr><td>0.60</td><td>64</td><td>79</td><td>119</td></tr><tr><td>0.75</td><td>52</td><td>64</td><td>97</td></tr><tr><td>0.90</td><td>45</td><td>55</td><td>82</td></tr><tr><td>0.99</td><td>41</td><td>51</td><td>77</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table> | | | | Load Current [A] | Time [mS] | | | Input Volt. 85[V] | Input Volt. 100[V] | Input Volt. 132[V] | 0.00 | — | — | — | 0.15 | 195 | 231 | 346 | 0.30 | 123 | 152 | 222 | 0.45 | 87 | 106 | 157 | 0.60 | 64 | 79 | 119 | 0.75 | 52 | 64 | 97 | 0.90 | 45 | 55 | 82 | 0.99 | 41 | 51 | 77 | — | — | — | — | — | — | — | — | — | — | — | — |
| Load Current [A] | Time [mS] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Input Volt. 85[V] | Input Volt. 100[V] | Input Volt. 132[V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.00 | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.15 | 195 | 231 | 346 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.30 | 123 | 152 | 222 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.45 | 87 | 106 | 157 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.60 | 64 | 79 | 119 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.75 | 52 | 64 | 97 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.90 | 45 | 55 | 82 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.99 | 41 | 51 | 77 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note:Slanted line shows the range of the rated load current.</p> <p>瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。</p> <p>(注)斜線は定格負荷電流範囲を示す。</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

BC-0759

COSEL

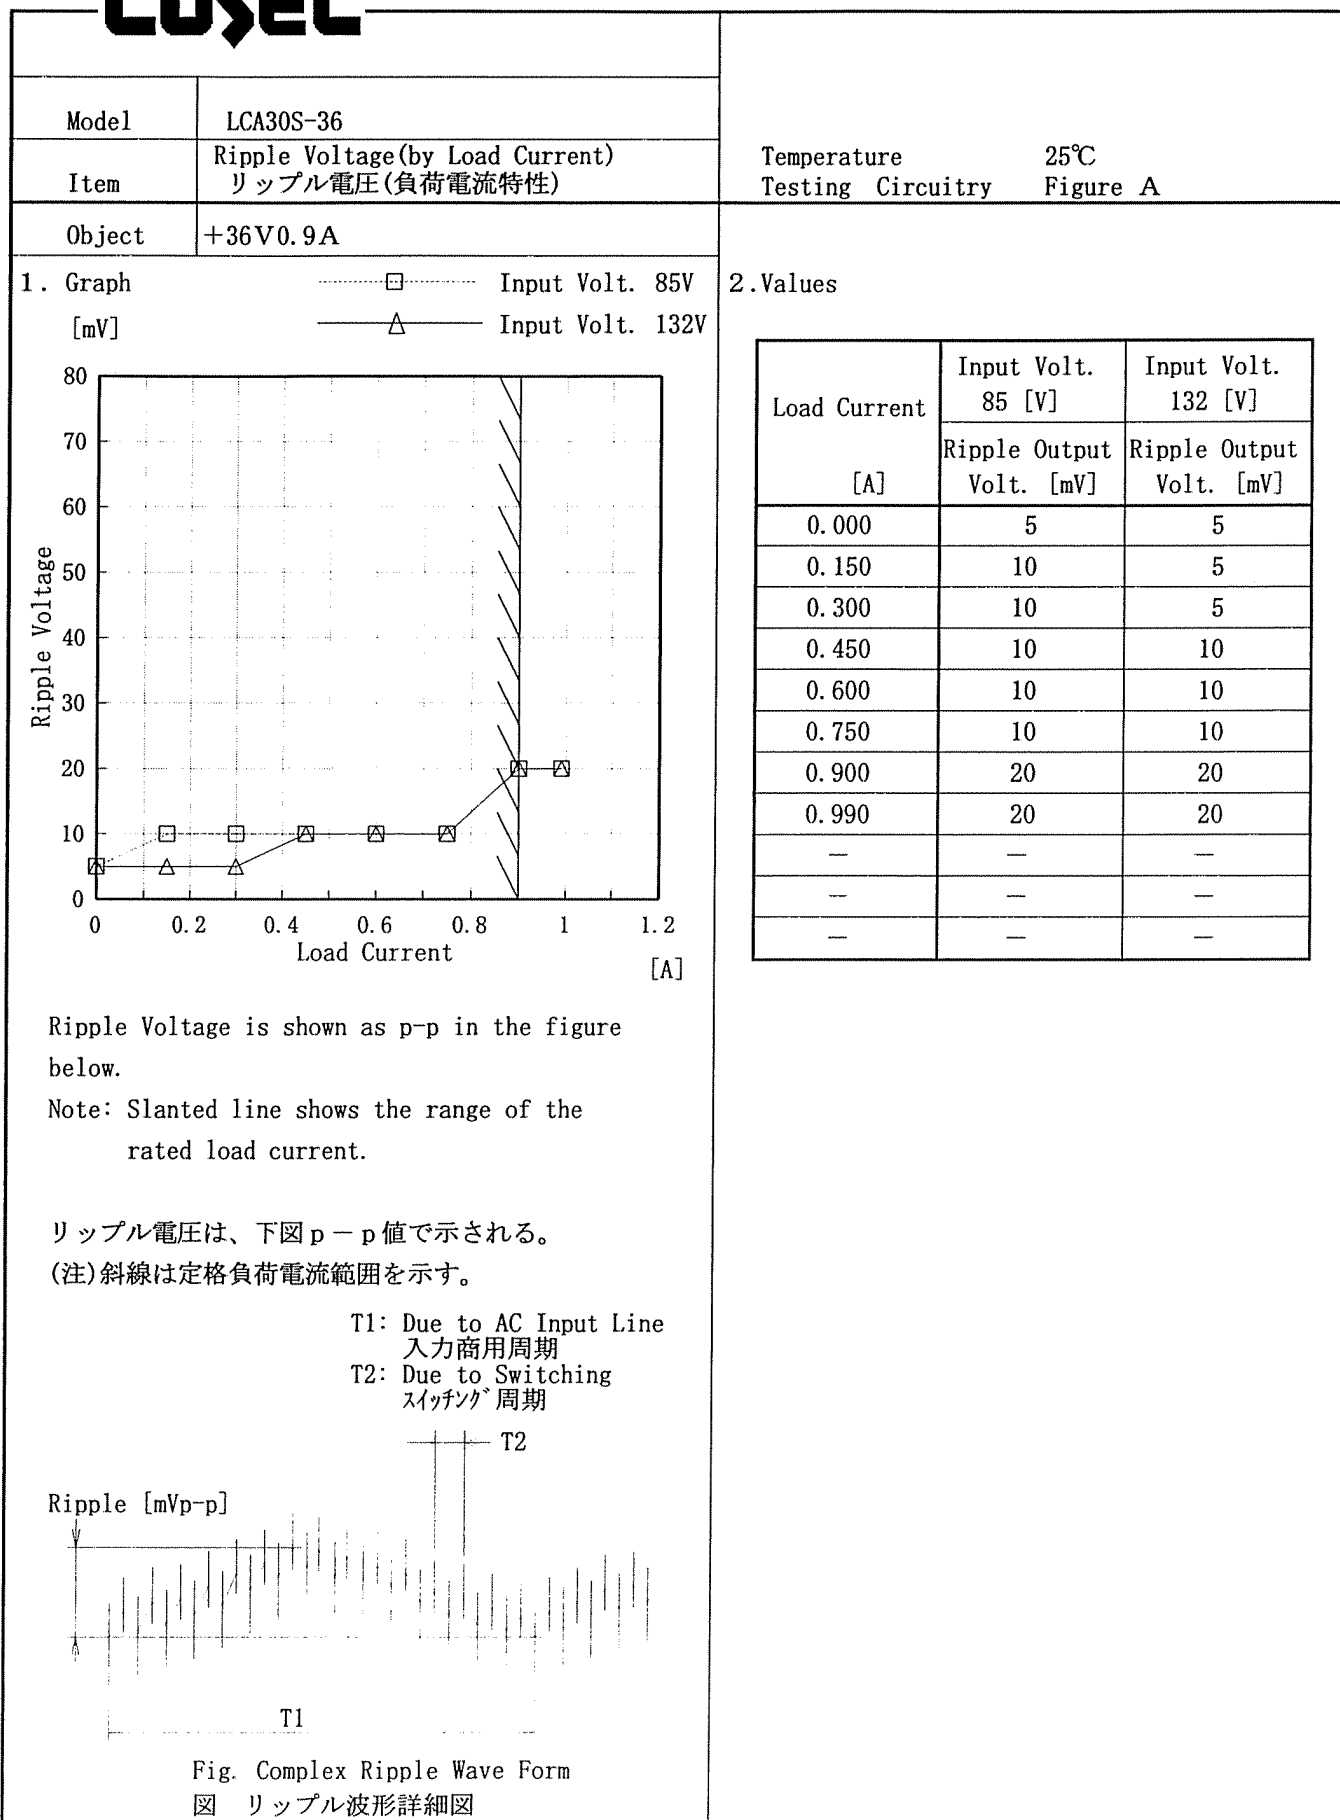

BC-0759

COSEL

| | | | |
|--------|--|---------------------------------|--|
| Model | | LCA30S-36 | |
| Item | | Overcurrent Protection 過電流保護 | |
| Object | | +36.0V0.9A | |

1. Graph

Input Volt. 85 V

Input Volt. 100 V

Input Volt. 132 V

[V]

50.0

40.0

30.0

20.0

10.0

0.0

0

0.2

0.4

0.6

0.8

1

1.2

Output Voltage

Load Current

[A]

Note: Slanted line shows the range of the rated load current.


(注)斜線は定格負荷電流範囲を示す。

| | | | |
|-----------------------|----------------------|-----------------------|-----------------------|
| Output Voltage [V] | Load Current [A] | | |
| | Input Volt. 85[V] | Input Volt. 100[V] | Input Volt. 132[V] |
| 36.00 | 1.010 | 1.009 | 1.023 |
| 34.20 | 1.017 | 1.012 | 1.024 |
| 32.40 | 1.023 | 1.016 | 1.026 |
| 28.80 | 1.034 | 1.024 | 1.032 |
| 25.20 | 1.039 | 1.025 | 1.031 |
| 21.60 | 1.033 | 1.017 | 1.022 |
| 18.00 | 1.017 | 1.000 | 1.007 |
| 14.40 | 0.985 | 0.969 | 0.978 |
| 10.80 | 0.929 | 0.917 | 0.932 |
| 7.20 | 0.840 | 0.835 | 0.858 |
| 3.60 | 0.695 | 0.700 | 0.735 |
| 0.00 | 0.463 | 0.481 | 0.532 |

2. Values

COSEL

| | | | |
|--------|------------------------|-------------------|----------|
| Model | LCA30S-36 | Temperature | 25°C |
| Item | Inrush Current 突入電流 | Testing Circuitry | Figure A |
| Object | _____ | | |

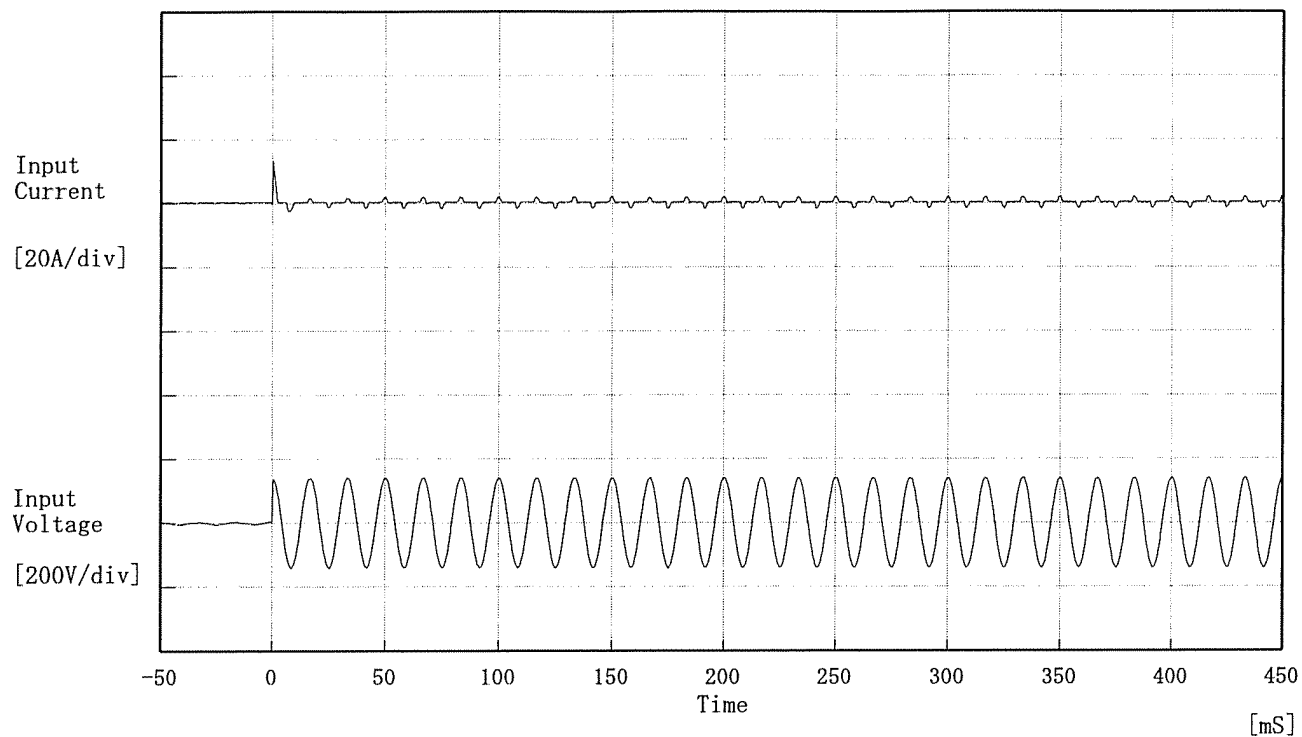

Input Voltage 100 V


Frequency 60 Hz

Load 100 %

Inrush Current

① 13.18 [A]

② 1.98 [A]

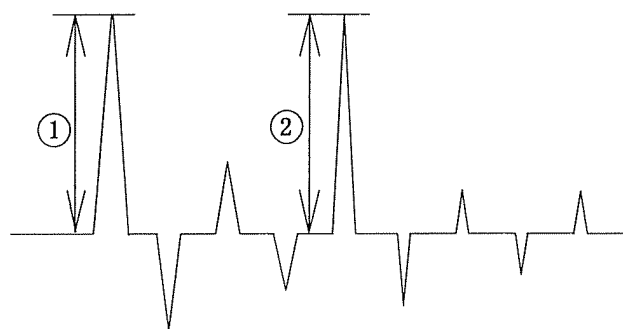

COSEL

| | | |
|--------|---------------------------------|--|
| Model | LCA30S-36 | Temperature 25°C Testing Circuitry Figure A |
| Item | Dynamic Load Responce 動的負荷変動 | |
| Object | +36V0.9A | |



Input Volt. 100 V

Cycle 1000 mS

Load Current



Load 0% ↔

Load 100 %

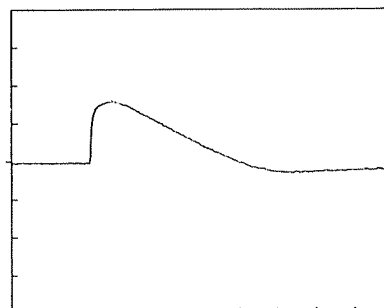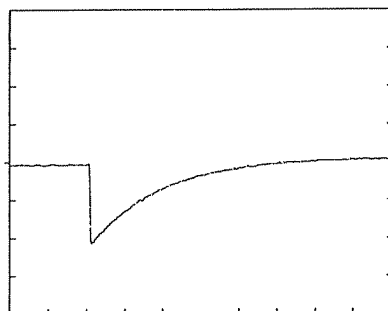

Load 0% ↔


Load 50 %

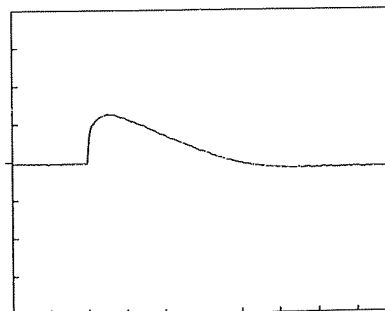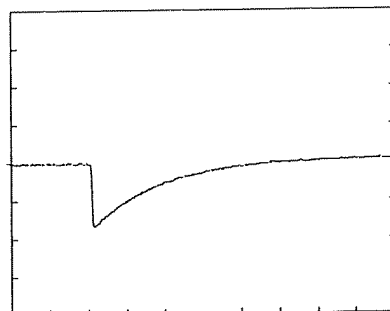

200 mV/div

10 mS/div

COSEL

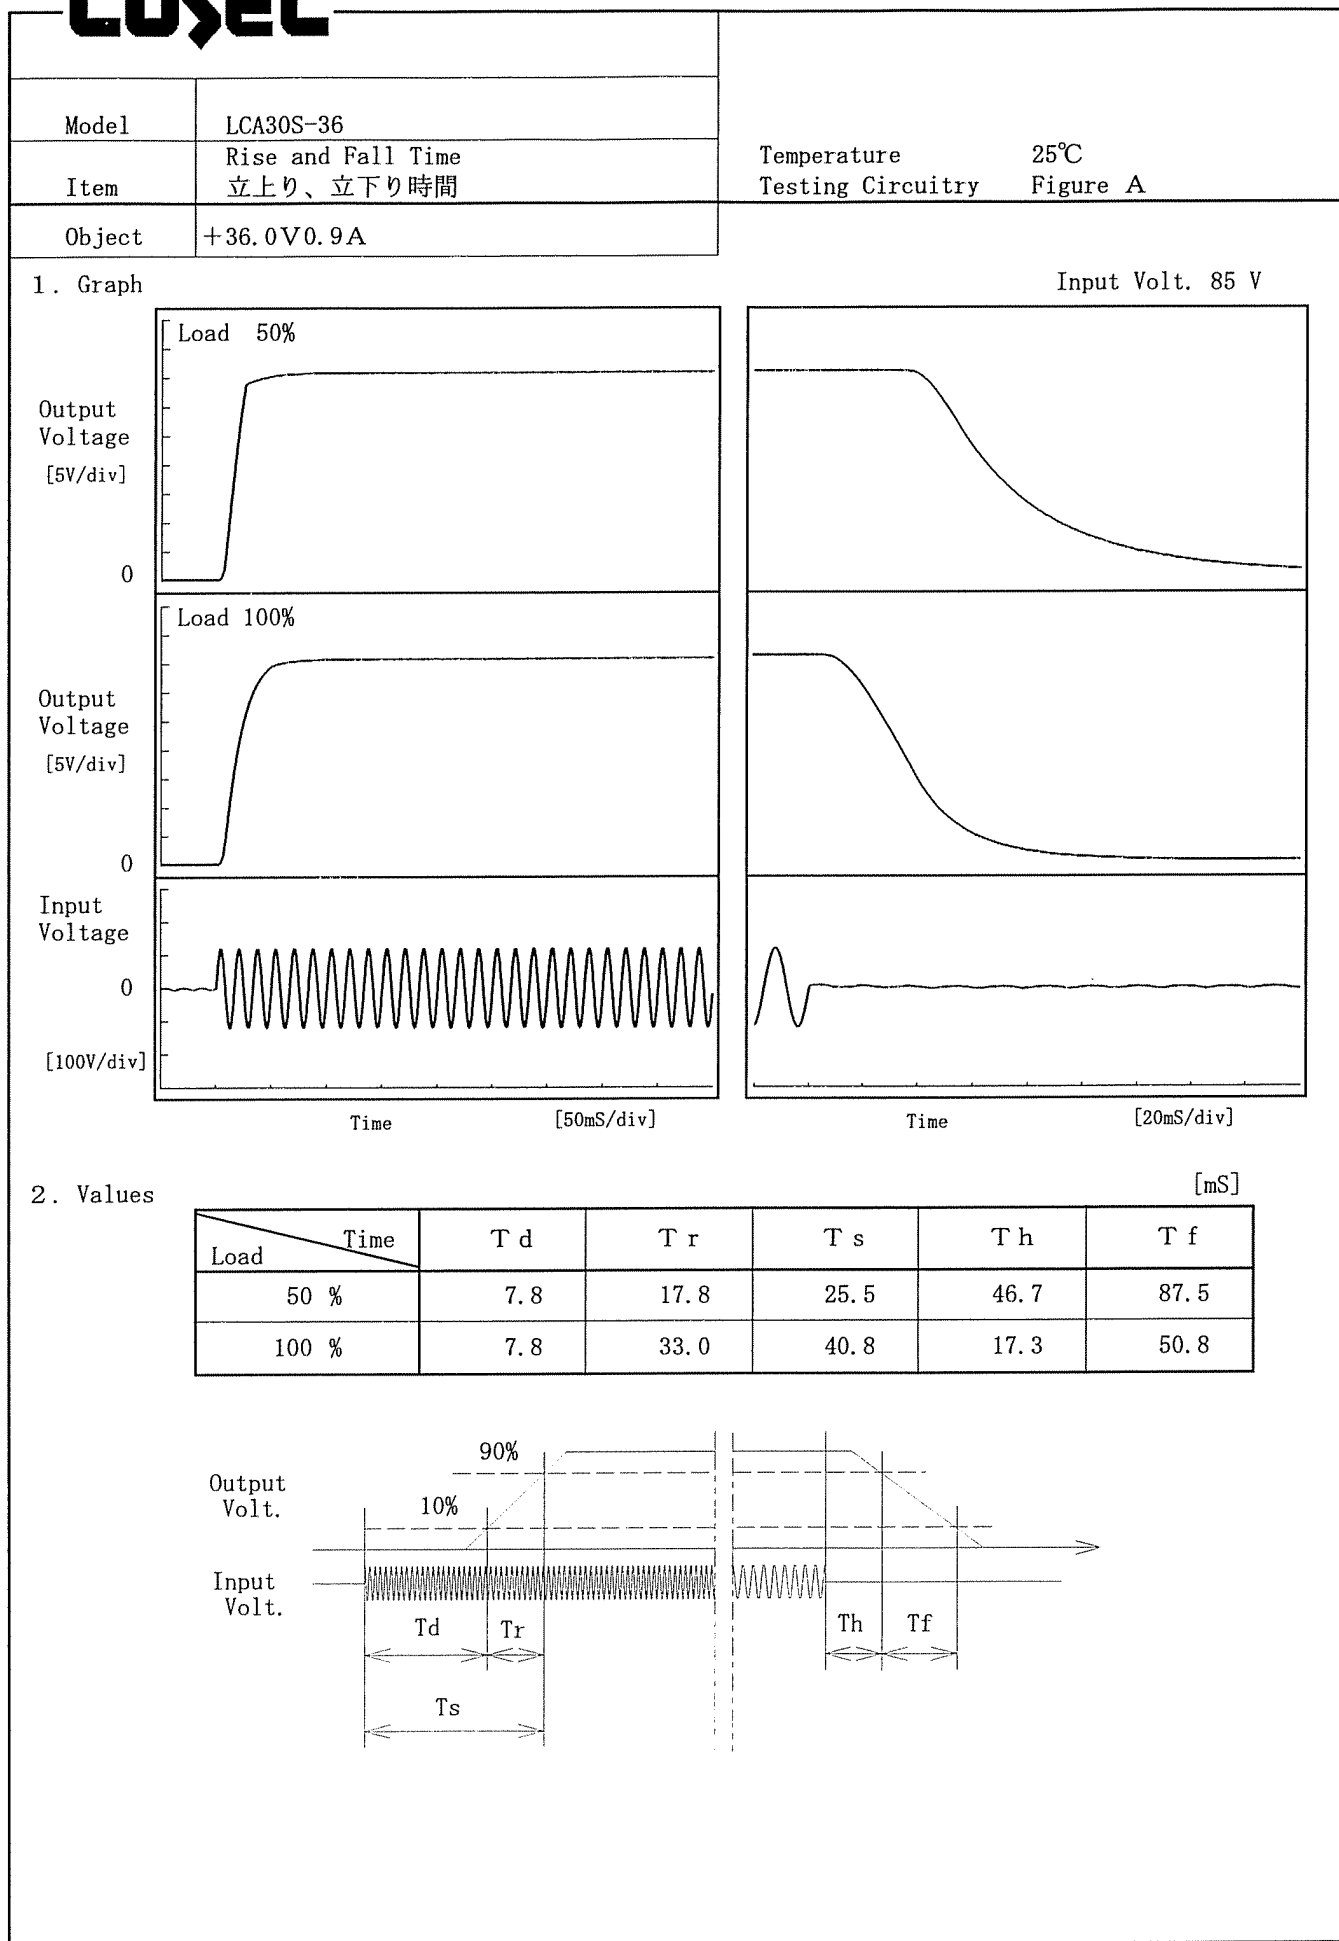

COSEL

| | | | |
|--------|--|-------------------------------------|--|
| Model | | LCA30S-36 | |
| Item | | Ambient Temperature Drift 周囲温度変動 | |
| Object | | +36.0V0.9A | |

1. Graph

—△—

—□—

—○—

Input Volt. 85V

Input Volt. 100V

Input Volt. 132V

[V]

Output Voltage

Ambient Temperature

Load 100%

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values

| Ambient Temperature [°C] | Output Voltage [V] | | |
|-----------------------------|-----------------------|-----------------------|-----------------------|
| | Input Volt. 85[V] | Input Volt. 100[V] | Input Volt. 132[V] |
| -20 | 36.357 | 36.357 | 36.356 |
| -10 | 36.362 | 36.362 | 36.361 |
| 0 | 36.361 | 36.361 | 36.360 |
| 10 | 36.356 | 36.356 | 36.355 |
| 20 | 36.349 | 36.348 | 36.347 |
| 25 | 36.343 | 36.342 | 36.341 |
| 30 | 36.342 | 36.341 | 36.339 |
| 40 | 36.325 | 36.324 | 36.322 |
| 50 | 36.309 | 36.308 | 36.306 |
| 60 | 36.295 | 36.294 | 36.292 |
| — | — | — | — |

COSEL

| Model | | LCA30S-36 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------|-------------------|--|--------------------------|-------------------|--|----------|-----------|-----|----|----|-----|----|----|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|
| Item | | Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | | +36.0V0.9A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1. Graph | | <div> <div> <div>-----□-----</div> <div>Load 50%</div> </div> <div> <div>-----△-----</div> <div>Load 100%</div> </div> </div> <p>Input Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注)斜線は定格周囲温度範囲を示す。</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2. Values | | <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th><th colspan="2">Input Voltage [V]</th></tr> <tr> <th>Load 50%</th><th>Load 100%</th></tr> </thead> <tbody> <tr><td>-20</td><td>39</td><td>70</td></tr> <tr><td>-10</td><td>39</td><td>69</td></tr> <tr><td>0</td><td>39</td><td>69</td></tr> <tr><td>10</td><td>39</td><td>68</td></tr> <tr><td>20</td><td>39</td><td>68</td></tr> <tr><td>25</td><td>39</td><td>68</td></tr> <tr><td>30</td><td>39</td><td>68</td></tr> <tr><td>40</td><td>39</td><td>68</td></tr> <tr><td>50</td><td>39</td><td>67</td></tr> <tr><td>60</td><td>39</td><td>67</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table> | Ambient Temperature [°C] | Input Voltage [V] | | Load 50% | Load 100% | -20 | 39 | 70 | -10 | 39 | 69 | 0 | 39 | 69 | 10 | 39 | 68 | 20 | 39 | 68 | 25 | 39 | 68 | 30 | 39 | 68 | 40 | 39 | 68 | 50 | 39 | 67 | 60 | 39 | 67 | — | — | — |
| Ambient Temperature [°C] | Input Voltage [V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Load 50% | Load 100% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -20 | 39 | 70 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -10 | 39 | 69 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 39 | 69 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | 39 | 68 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 20 | 39 | 68 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25 | 39 | 68 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30 | 39 | 68 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 40 | 39 | 68 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50 | 39 | 67 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 60 | 39 | 67 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

COSEL

| Model LCA30S-36 | | Testing Circuitry Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|--|--------------------|--------------------------------------|---------------------------------------|-----|----|----|-----|----|----|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|
| Item | Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | +36V0.9A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>1. Graph</p> <p>-----□----- Load 50%</p> <p>-----△----- Load 100%</p> <p>[mV]</p> <p>Ripple Voltage</p> <p>Ambient Temperature [°C]</p> <p>Input Volt. 85 V</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注)斜線は定格周囲温度範囲を示す。</p> | | <p>2. Values</p> <table border="1"> <thead> <tr> <th>Ambient Temp. [°C]</th><th>Load 50% Ripple Output Volt. [mV]</th><th>Load 100% Ripple Output Volt. [mV]</th></tr> </thead> <tbody> <tr><td>-20</td><td>55</td><td>55</td></tr> <tr><td>-10</td><td>55</td><td>50</td></tr> <tr><td>0</td><td>40</td><td>40</td></tr> <tr><td>10</td><td>35</td><td>30</td></tr> <tr><td>20</td><td>25</td><td>20</td></tr> <tr><td>25</td><td>20</td><td>20</td></tr> <tr><td>30</td><td>20</td><td>20</td></tr> <tr><td>40</td><td>20</td><td>20</td></tr> <tr><td>50</td><td>20</td><td>20</td></tr> <tr><td>60</td><td>20</td><td>20</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table> | Ambient Temp. [°C] | Load 50% Ripple Output Volt. [mV] | Load 100% Ripple Output Volt. [mV] | -20 | 55 | 55 | -10 | 55 | 50 | 0 | 40 | 40 | 10 | 35 | 30 | 20 | 25 | 20 | 25 | 20 | 20 | 30 | 20 | 20 | 40 | 20 | 20 | 50 | 20 | 20 | 60 | 20 | 20 | — | — | — |
| Ambient Temp. [°C] | Load 50% Ripple Output Volt. [mV] | Load 100% Ripple Output Volt. [mV] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -20 | 55 | 55 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -10 | 55 | 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 40 | 40 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | 35 | 30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 20 | 25 | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25 | 20 | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30 | 20 | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 40 | 20 | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50 | 20 | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 60 | 20 | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

COSEL

| COSEL | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|----------------------------|--|----------|----------------------|--------------------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|
| Model | LCA30S-36 | | | | | | | | | | | | | | | | | | | | | | | | |
| Item | Time Lapse Drift 経時ドリフト | Temperature | 25℃ | | | | | | | | | | | | | | | | | | | | | | |
| Object | +36V0.9A | Testing Circuitry | Figure C | | | | | | | | | | | | | | | | | | | | | | |
| 1. Graph | | 2.Values | | | | | | | | | | | | | | | | | | | | | | | |
| <div>[V]</div> <div><p>Output Voltage</p><p>Time [H]</p><p>Input Volt. 100V</p><p>Load 100%</p></div> | | <table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>36.347</td></tr><tr><td>0.5</td><td>36.334</td></tr><tr><td>1.0</td><td>36.334</td></tr><tr><td>2.0</td><td>36.334</td></tr><tr><td>3.0</td><td>36.334</td></tr><tr><td>4.0</td><td>36.334</td></tr><tr><td>5.0</td><td>36.334</td></tr><tr><td>6.0</td><td>36.334</td></tr><tr><td>7.0</td><td>36.334</td></tr><tr><td>8.0</td><td>36.333</td></tr></table> | | Time since start [H] | Output Voltage [V] | 0.0 | 36.347 | 0.5 | 36.334 | 1.0 | 36.334 | 2.0 | 36.334 | 3.0 | 36.334 | 4.0 | 36.334 | 5.0 | 36.334 | 6.0 | 36.334 | 7.0 | 36.334 | 8.0 | 36.333 |
| Time since start [H] | Output Voltage [V] | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.0 | 36.347 | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.5 | 36.334 | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.0 | 36.334 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.0 | 36.334 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.0 | 36.334 | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.0 | 36.334 | | | | | | | | | | | | | | | | | | | | | | | | |
| 5.0 | 36.334 | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.0 | 36.334 | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.0 | 36.334 | | | | | | | | | | | | | | | | | | | | | | | | |
| 8.0 | 36.333 | | | | | | | | | | | | | | | | | | | | | | | | |



| | | |
|--------|----------------------------------|--------------------------------|
| COSEL | | Testing Circuitry Figure A |
| Model | LCA30S-36 | |
| Item | Output Voltage Accuracy 定電圧精度 | |
| Object | +36.0V0.9A | |

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 85~132 V

Load Current : 0~0.9 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ratio) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

1. 定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 85~132 V

負荷電流 0~0.9 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

2. Values

| Item | Temperature [°C] | Input Voltage [V] | Output Current [A] | Output Voltage [V] | Output Voltage Accuracy [mV] | Output Voltage Accuracy (Ratio) [%] |
|-----------------|---------------------|----------------------|-----------------------|-----------------------|---------------------------------|--|
| Maximum Voltage | -10 | 85 | 0.9 | 36.363 | ±33 | ±0.1 |
| Minimum Voltage | 50 | 132 | 0.0 | 36.299 | | |

COSEL

LUXEL

| | |
|--------|-------------------------|
| Model | LCA30S-36 |
| Item | Leakage Current 漏洩電流 |
| Object | |

1. Results

| Standards | Leakage Current [mA] | | |
|--------------|-----------------------|------------------------|------------------------|
| | Input Volt. 85 [V] | Input Volt. 100 [V] | Input Volt. 132 [V] |
| (A) DENTORI | 0.09 | 0.11 | 0.14 |
| (B) IEC60950 | 0.09 | 0.11 | 0.14 |

| Standards | Leakage Current [mA] | | |
|--------------|------------------------|------------------------|------------------------|
| | Input Volt. 170 [V] | Input Volt. 230 [V] | Input Volt. 264 [V] |
| (B) IEC60950 | — | — | — |

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力の両相について測定し、その大きい方を漏洩電流測定値とする。

— 21 —

BC-0759

COSEL

| | | | |
|-----------|--------------------------------|--|--|
| LCA30S-36 | | Temperature 25°C Testing Circuitry Figure C | |
| Model | LCA30S-36 | | |
| Item | Line Noise Tolerance 入力雑音耐量 | | |
| Object | +36V0.9A | | |

1. Results

| Pulse Width [nS] | MODE | No protection failure should occur 保護回路の誤動作がない | DC-like Regulation of Output Voltage 出力電圧の直流的変動 |
|-----------------------|--------|---|--|
| 50 | COMMON | OK | no fluctuation |
| | NORMAL | OK | no fluctuation |
| 1000 | COMMON | OK | no fluctuation |
| | NORMAL | OK | no fluctuation |

2. Conditions

Input Voltage : 100 V
 Pulse Voltage : 2000 V
 Pulse Cycle : 10 mS
 Pulse Input Duration : 1 min. or more
 Load : 100 %

COSEL

| | | | |
|--------|------------------------------|----------------------------------|-----------------|
| Model | LCA30S-36 | Temperature Testing Circuitry | 25℃ Figure D |
| Item | Conducted Emission 雑音端子電圧 | | |
| Object | | | |

1. Graph

Remarks


Input Volt. 100 V (VCCI Class B)

120 V (FCC Class B)


Load 100 %

規格 1 : [VCCI] Class B (QP)

規格 2 : [VCCI] Class B (平均値)

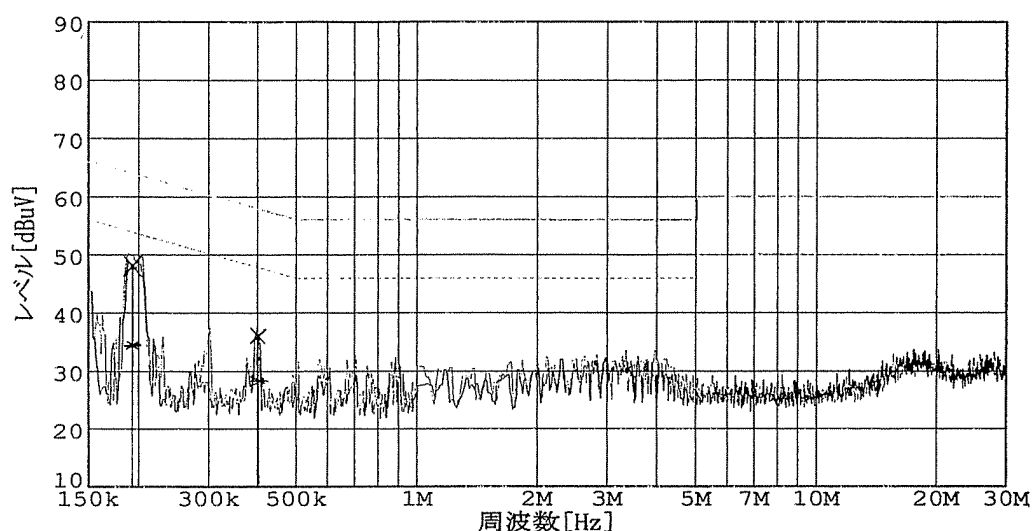

規格 1 : [FCC Part15] Class B

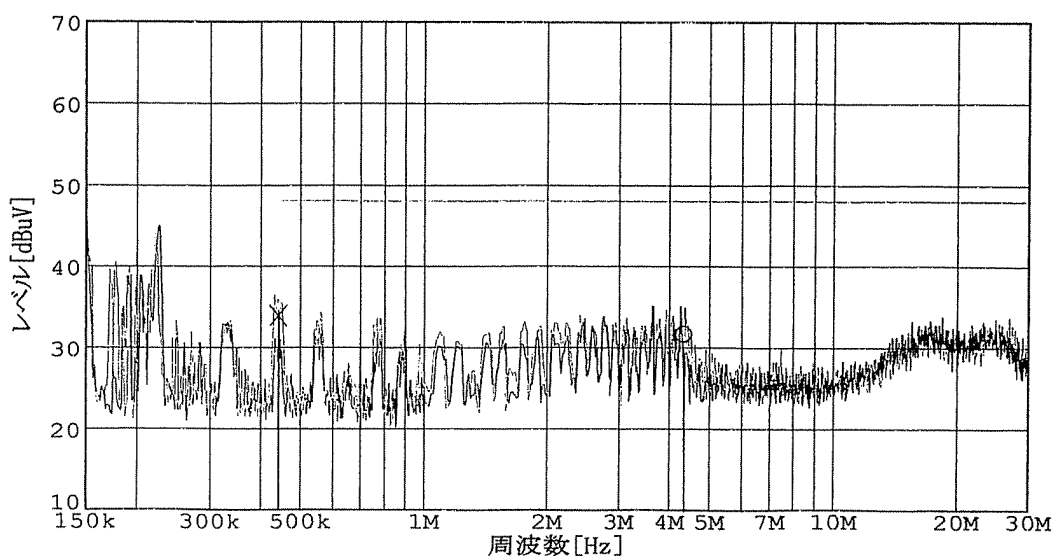

COSEL

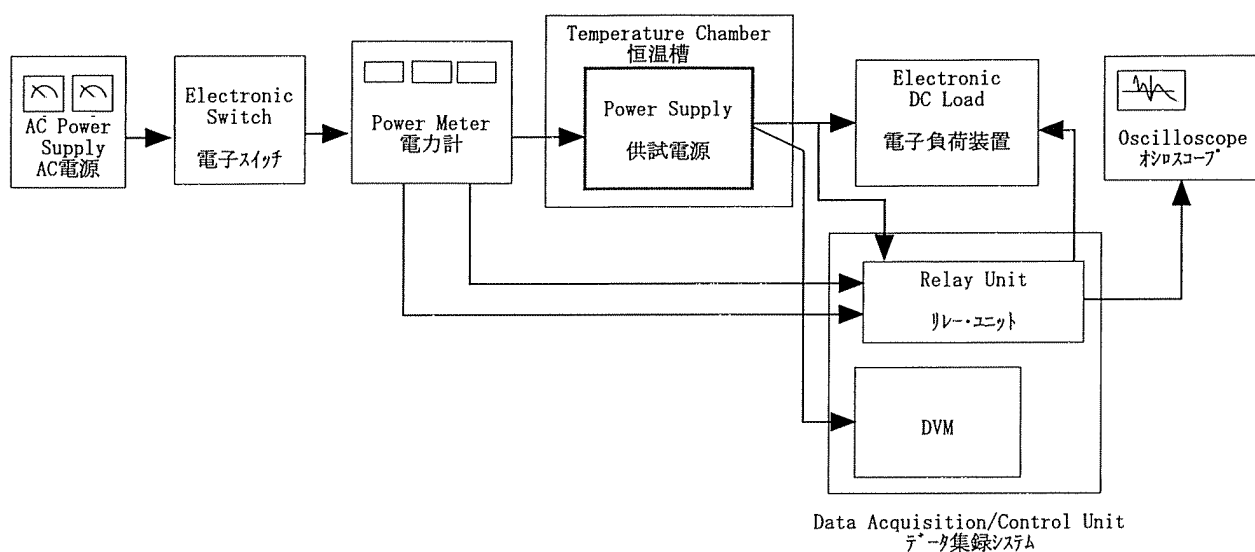


Figure A

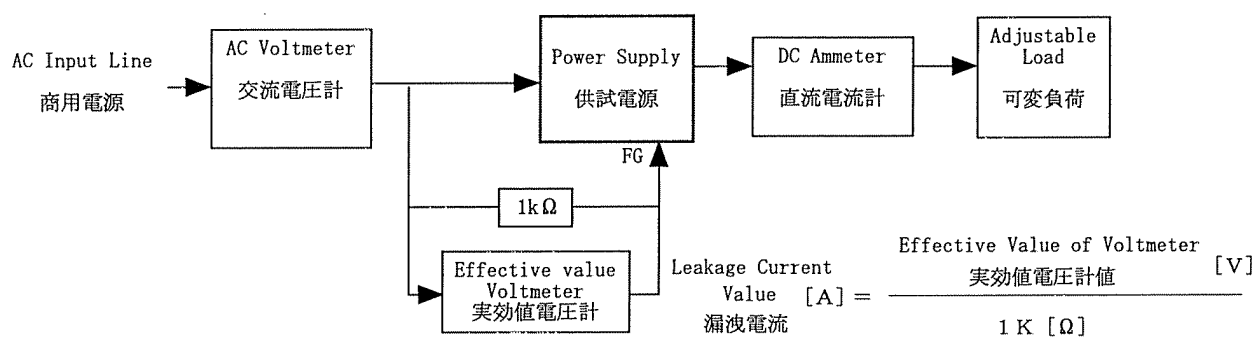


Figure B (DENTORI)

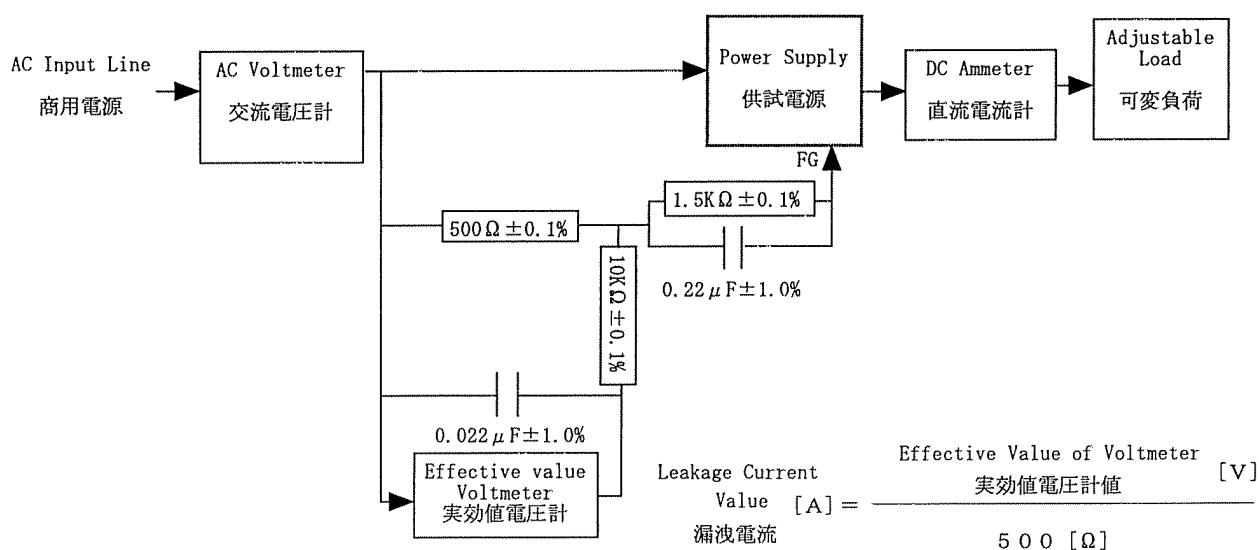


Figure B (IEC60950)

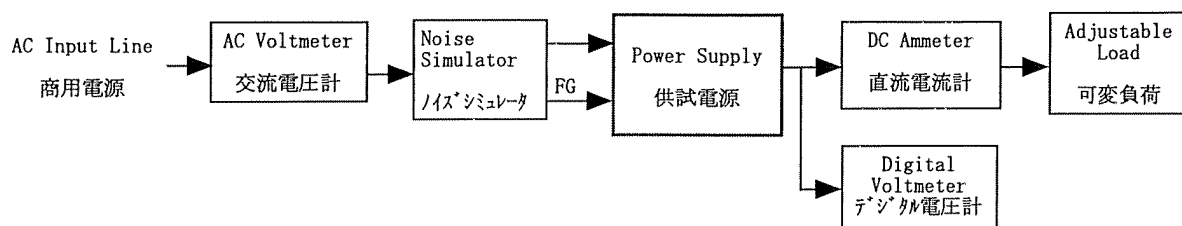


Figure C

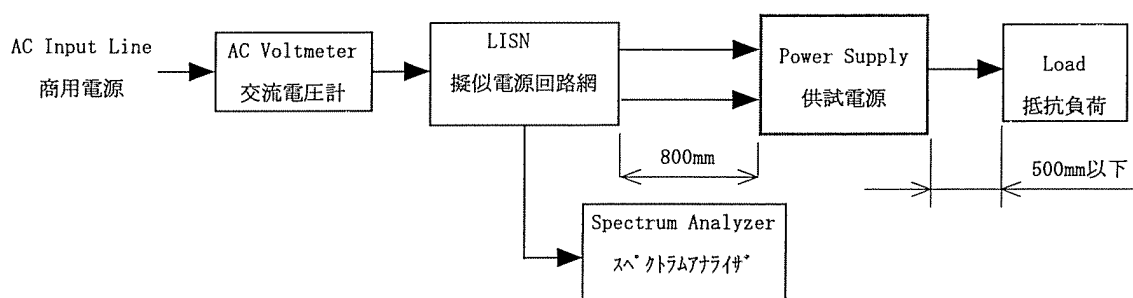


Figure D

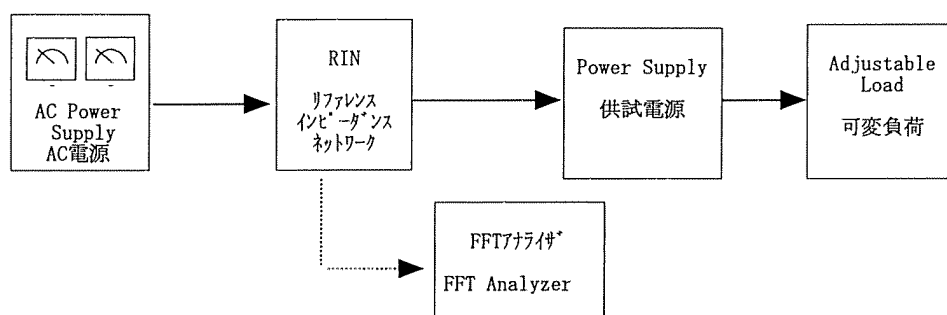


Figure E