



TEST DATA OF LCA50S-24

(100V INPUT)

Regulated DC Power Supply

Date : Aug. 6. 1999

Approved by : H. Yamaguchi
Design Manager

Prepared by : S. Taniguchi
Design Engineer

コーセル株式会社
COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Input Current (by Load Current)	2
入力電流 (負荷特性)	
3. Input Power (by Load Current)	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage)	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current)	5
効率 (負荷特性)	
6. Hold-Up Time	6
出力保持時間	
7. Instantaneous Interruption Compensation	7
瞬時停電保障	
8. Load Regulation	8
静的負荷変動	
9. Ripple Voltage (by Load Current)	9
リップル電圧 (負荷特性)	
10. Ripple-Noise	10
リップルノイズ	
11. Overcurrent Protection	11
過電流保護	
12. Overvoltage Protection	12
過電圧保護	
13. Inrush Current	13
突入電流	
14. Dynamic Load Response	14
動的負荷変動	
15. Rise and Fall Time	15
立上り、立下がり時間	
16. Ambient Temperature Drift	16
周囲温度変動	
17. Minimum Input Voltage for Regulated Output Voltage	17
最低レギュレーション電圧	
18. Ripple Voltage (by Ambient Temperature)	18
リップル電圧 (周囲温度特性)	
19. Time Lapse Drift	19
経時ドリフト	
20. Output Voltage Accuracy	20
定電圧精度	
21. Condensation	21
結露特性	
22. Leakage Current	22
漏洩電流	
23. Line Noise Tolerance	23
入力雑音耐量	
24. Conducted Emission	24
雑音端子電圧	
25. Figure of Testing Circuitry	25
測定回路図	

(Final Page 26)

COSEL


Model LCA50S-24

Item Line Regulation 静的入力変動

Object +24.0V2.5A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

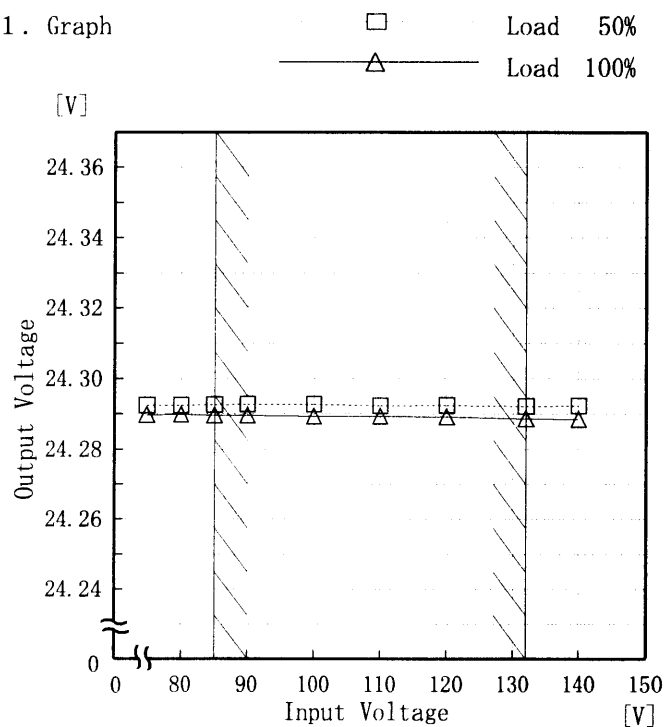

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
75	24.293	24.290
80	24.293	24.290
85	24.293	24.290
90	24.293	24.290
100	24.293	24.289
110	24.292	24.289
120	24.293	24.289
132	24.292	24.289
140	24.292	24.289

COSEL

Model		LCA50S-24	
Item		Input Current (by Load Current) 入力電流 (負荷特性)	
Output		—————	

1. Graph

—△— Input Volt. 85V

- - □ - - Input Volt. 100V

- - ○ - - Input Volt. 132V

Input Current [A]

Load Current [A]

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。

2. Values

Load Current [A]	Input Current [A]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
0.00	0.053	0.056	0.061
0.40	0.295	0.272	0.240
0.80	0.509	0.459	0.389
1.20	0.731	0.653	0.549
1.60	0.955	0.877	0.725
2.00	1.215	1.090	0.891
2.40	1.462	1.290	1.048
2.50	1.519	1.340	1.088
2.75	1.667	1.464	1.182
—	—	—	—
—	—	—	—
—	—	—	—

COSEL

Model		LCA50S-24		Temperature		25℃	
Item		Input Power (by Load Current) 入力電力 (負荷特性)		Testing Circuitry		Figure A	
Output		_____					
1. Graph				2. Values			

△

□

○

Input Volt. 85V
Input Volt. 100V
Input Volt. 132V

Input Power [W]

100
80
60
40
20
0

Load Current [A]

0123

COSEL

Model		LCA50S-24	Temperature Testing Circuitry	25℃ Figure A																																
Item		Efficiency 効率																																		
Object																																				
1. Graph			2. Values																																	
<div><div>□ Load 50%</div><div>—△— Load 100%</div></div> <p>Efficiency [%]</p> <p>Input Voltage [V]</p>			<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Efficiency [%]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>75</td><td>82.1</td><td>80.6</td></tr><tr><td>80</td><td>82.3</td><td>80.6</td></tr><tr><td>85</td><td>82.3</td><td>81.4</td></tr><tr><td>90</td><td>82.0</td><td>81.9</td></tr><tr><td>100</td><td>81.9</td><td>82.5</td></tr><tr><td>110</td><td>81.5</td><td>82.4</td></tr><tr><td>120</td><td>81.0</td><td>82.4</td></tr><tr><td>132</td><td>80.0</td><td>82.3</td></tr><tr><td>140</td><td>79.7</td><td>82.2</td></tr></table>		Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	75	82.1	80.6	80	82.3	80.6	85	82.3	81.4	90	82.0	81.9	100	81.9	82.5	110	81.5	82.4	120	81.0	82.4	132	80.0	82.3	140	79.7	82.2
Input Voltage [V]	Efficiency [%]																																			
	Load 50%	Load 100%																																		
75	82.1	80.6																																		
80	82.3	80.6																																		
85	82.3	81.4																																		
90	82.0	81.9																																		
100	81.9	82.5																																		
110	81.5	82.4																																		
120	81.0	82.4																																		
132	80.0	82.3																																		
140	79.7	82.2																																		
Note: Slanted line shows the range of the rated input voltage.																																				
(注) 斜線は定格入力電圧範囲を示す。																																				

COSEL

Model		LCA50S-24		Temperature 25℃																																																								
Item		Efficiency (by Load Current) 効率 (負荷電流特性)		Testing Circuitry Figure A																																																								
Output		—																																																										
1. Graph				2. Values																																																								
<div><div>—△— Input Volt. 85V —□— Input Volt. 100V —○— Input Volt. 132V</div><p>Efficiency [%]</p><p>Load Current [A]</p></div> <div>Note: Slanted line shows the range of the rated load current</div> <div>(注)斜線は定格負荷電流範囲を示す。</div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Efficiency [%]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>0.40</td><td>73.4</td><td>71.0</td><td>65.5</td></tr><tr><td>0.80</td><td>80.1</td><td>78.9</td><td>75.5</td></tr><tr><td>1.20</td><td>81.9</td><td>81.6</td><td>79.4</td></tr><tr><td>1.60</td><td>82.9</td><td>82.5</td><td>81.3</td></tr><tr><td>2.00</td><td>81.9</td><td>82.7</td><td>82.2</td></tr><tr><td>2.40</td><td>81.6</td><td>82.3</td><td>82.3</td></tr><tr><td>2.50</td><td>81.4</td><td>82.2</td><td>82.3</td></tr><tr><td>2.75</td><td>80.8</td><td>81.8</td><td>82.5</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>		Load Current [A]	Efficiency [%]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.40	73.4	71.0	65.5	0.80	80.1	78.9	75.5	1.20	81.9	81.6	79.4	1.60	82.9	82.5	81.3	2.00	81.9	82.7	82.2	2.40	81.6	82.3	82.3	2.50	81.4	82.2	82.3	2.75	80.8	81.8	82.5	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Efficiency [%]																																																											
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																									
0.40	73.4	71.0	65.5																																																									
0.80	80.1	78.9	75.5																																																									
1.20	81.9	81.6	79.4																																																									
1.60	82.9	82.5	81.3																																																									
2.00	81.9	82.7	82.2																																																									
2.40	81.6	82.3	82.3																																																									
2.50	81.4	82.2	82.3																																																									
2.75	80.8	81.8	82.5																																																									
—	—	—	—																																																									
—	—	—	—																																																									
—	—	—	—																																																									
—	—	—	—																																																									

COSEL


Model LCA50S-24

Item Hold-Up Time 出力保持時間

Object +24.0V2.5A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

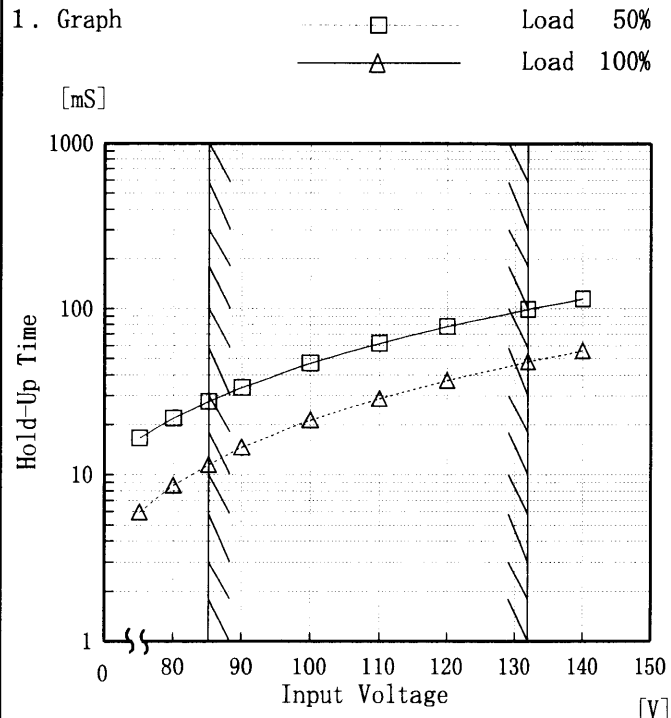

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated input voltage.

出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。

(注)斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	Hold-Up Time [mS]	
	Load 50%	Load 100%
75	17	6
80	22	9
85	28	12
90	34	15
100	47	21
110	62	29
120	78	37
132	99	48
140	115	56

COSEL

Model		LCA50S-24		Temperature		25℃																																																				
Item		Instantaneous Interruption Compensation 瞬時停電保障		Testing Circuitry		Figure A																																																				
Object		+24V2.5A																																																								
1. Graph				2. Values																																																						
<div><div><div>—△— Input Volt. 85V</div><div>---□--- Input Volt. 100V</div><div>-·-○-·- Input Volt. 132V</div></div><div><p>Instantaneous Compensation Time [ms]</p><p>Load Current [A]</p></div></div> <div>Note: Slanted line shows the range of the rated load current.</div> <div>(注) 斜線は定格負荷電流範囲を示す。</div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Time [ms]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>0.00</td><td>—</td><td>—</td><td>—</td></tr><tr><td>0.40</td><td>85</td><td>138</td><td>288</td></tr><tr><td>0.80</td><td>42</td><td>72</td><td>155</td></tr><tr><td>1.20</td><td>27</td><td>48</td><td>105</td></tr><tr><td>1.60</td><td>17</td><td>35</td><td>79</td></tr><tr><td>2.00</td><td>13</td><td>26</td><td>62</td></tr><tr><td>2.40</td><td>11</td><td>22</td><td>51</td></tr><tr><td>2.50</td><td>10</td><td>20</td><td>48</td></tr><tr><td>2.75</td><td>5</td><td>18</td><td>40</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr><tr><td>--</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Time [ms]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	—	—	—	0.40	85	138	288	0.80	42	72	155	1.20	27	48	105	1.60	17	35	79	2.00	13	26	62	2.40	11	22	51	2.50	10	20	48	2.75	5	18	40	--	—	—	—	--	—	—	—
Load Current [A]	Time [ms]																																																									
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																							
0.00	—	—	—																																																							
0.40	85	138	288																																																							
0.80	42	72	155																																																							
1.20	27	48	105																																																							
1.60	17	35	79																																																							
2.00	13	26	62																																																							
2.40	11	22	51																																																							
2.50	10	20	48																																																							
2.75	5	18	40																																																							
--	—	—	—																																																							
--	—	—	—																																																							

COSEL

COSEL																																																		
Model	LCA50S-24																																																	
Item	Load Regulation 静的負荷変動	Temperature	25℃																																															
		Testing Circuitry	Figure A																																															
Object	+24.0V2.5A																																																	
1. Graph		2. Values																																																
<div><div><div>△</div><div>□</div><div>○</div></div><div>Input Volt. 85 V Input Volt. 100 V Input Volt. 132 V</div></div> <p>Note: Slanted line shows the range of the rated load current.</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>0.00</td><td>24.296</td><td>24.296</td><td>24.296</td></tr><tr><td>0.40</td><td>24.295</td><td>24.294</td><td>24.294</td></tr><tr><td>0.80</td><td>24.294</td><td>24.293</td><td>24.293</td></tr><tr><td>1.20</td><td>24.293</td><td>24.292</td><td>24.292</td></tr><tr><td>1.60</td><td>24.292</td><td>24.291</td><td>24.291</td></tr><tr><td>2.00</td><td>24.291</td><td>24.291</td><td>24.290</td></tr><tr><td>2.40</td><td>24.290</td><td>24.289</td><td>24.289</td></tr><tr><td>2.50</td><td>24.290</td><td>24.289</td><td>24.289</td></tr><tr><td>2.75</td><td>24.289</td><td>24.289</td><td>24.288</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>		Load Current [A]	Output Voltage [V]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	24.296	24.296	24.296	0.40	24.295	24.294	24.294	0.80	24.294	24.293	24.293	1.20	24.293	24.292	24.292	1.60	24.292	24.291	24.291	2.00	24.291	24.291	24.290	2.40	24.290	24.289	24.289	2.50	24.290	24.289	24.289	2.75	24.289	24.289	24.288	—	—	—	—
Load Current [A]	Output Voltage [V]																																																	
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																															
0.00	24.296	24.296	24.296																																															
0.40	24.295	24.294	24.294																																															
0.80	24.294	24.293	24.293																																															
1.20	24.293	24.292	24.292																																															
1.60	24.292	24.291	24.291																																															
2.00	24.291	24.291	24.290																																															
2.40	24.290	24.289	24.289																																															
2.50	24.290	24.289	24.289																																															
2.75	24.289	24.289	24.288																																															
—	—	—	—																																															

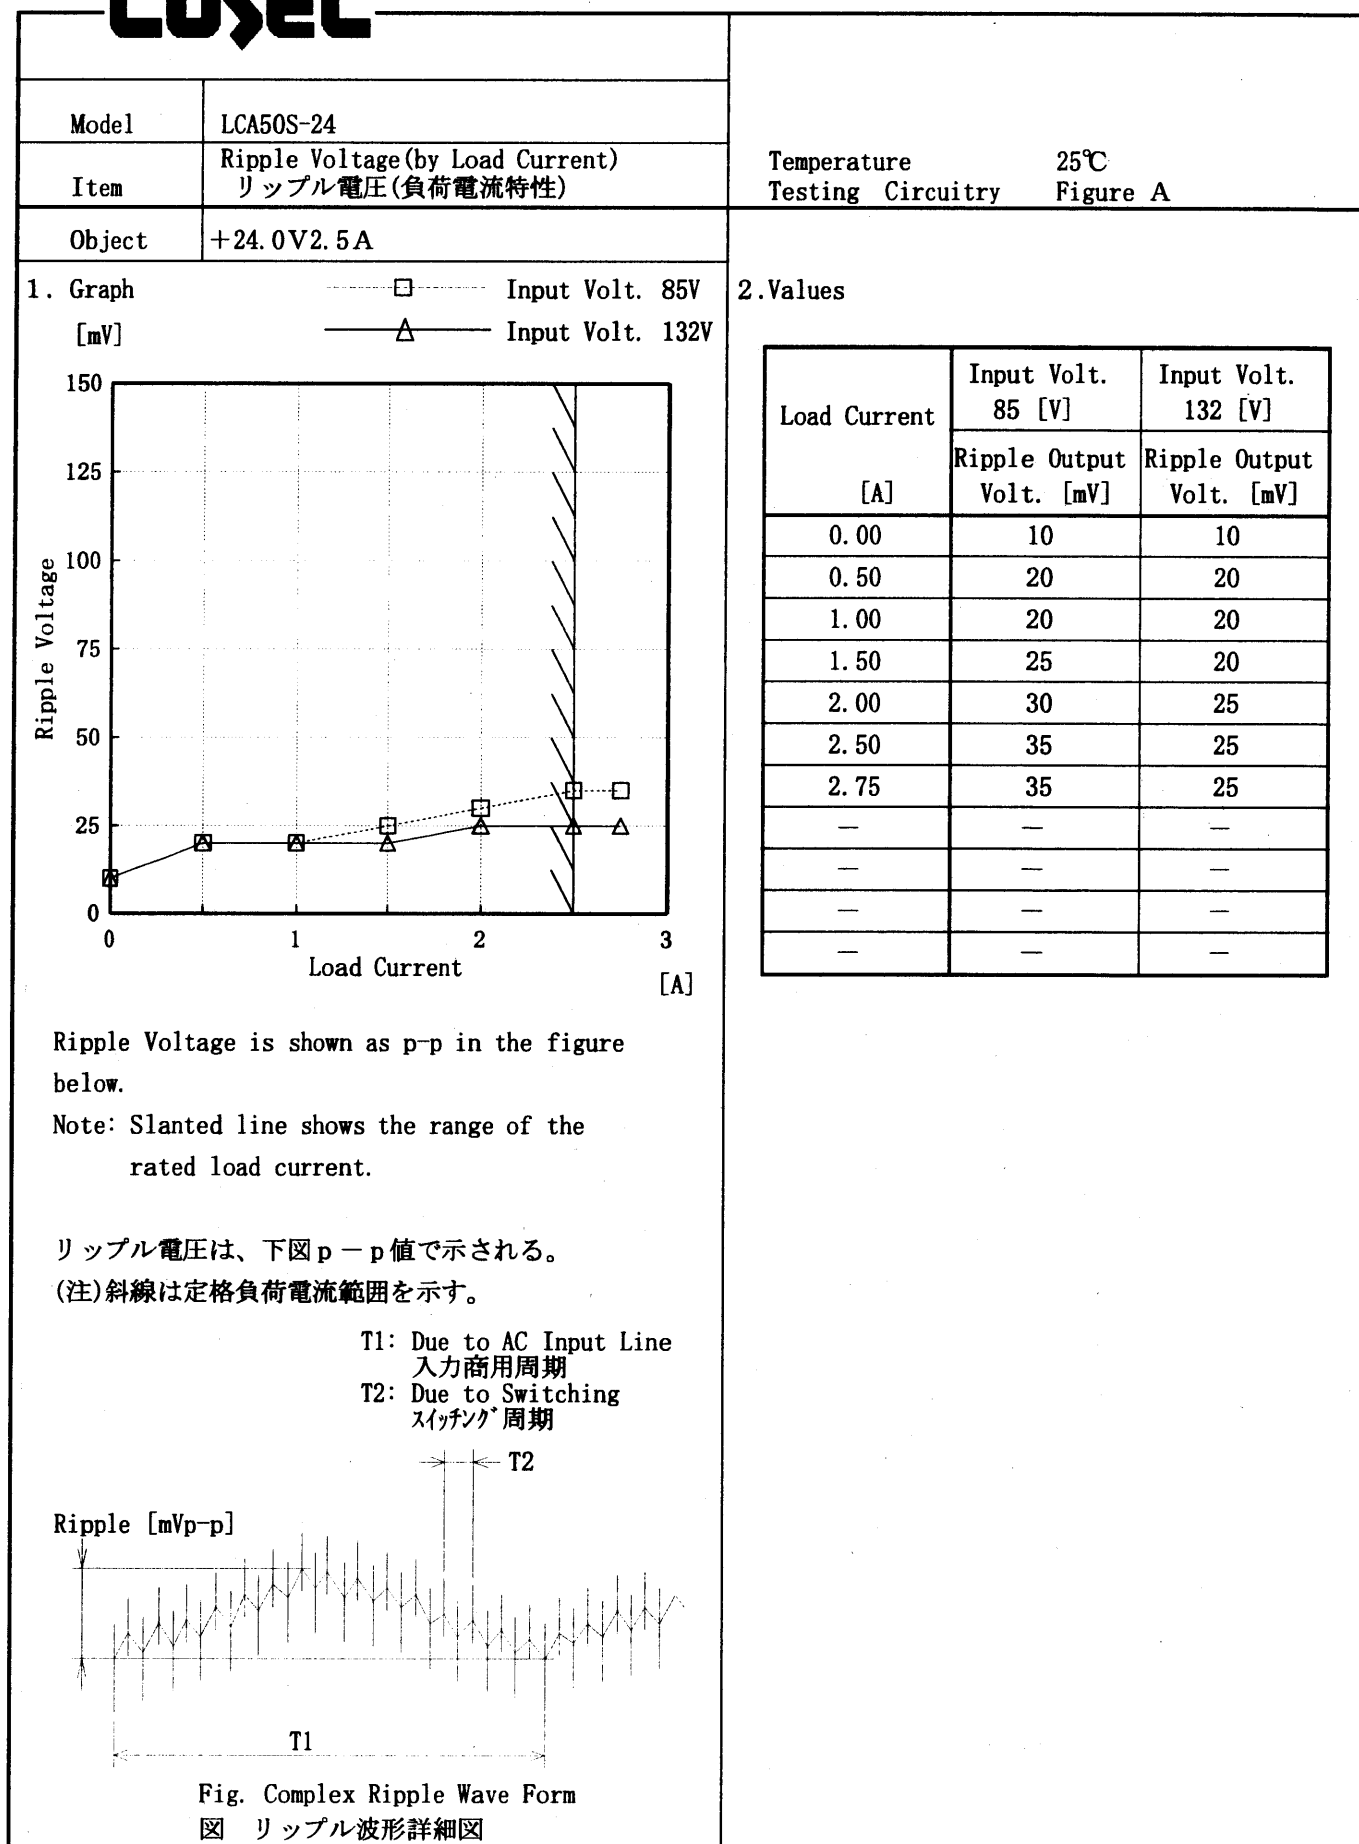
COSEL

Fig. Complex Ripple Wave Form
図 リップル波形詳細図

COSEL

Model		LCA50S-24		Temperature 25℃																																																						
Item		Overcurrent Protection 過電流保護		Testing Circuitry Figure A																																																						
Object		+24.0V2.5 A																																																								
1. Graph		Input Volt.85 V Input Volt.100 V Input Volt.132 V		2. Values																																																						
<div><div>[V]</div><div><div>40.0</div><div>30.0</div><div>20.0</div><div>10.0</div><div>0.0</div></div><div><div>0</div><div>1</div><div>2</div><div>3</div><div>4</div></div><div>Load Current [A]</div></div> <div><div>-----</div><div>-----</div><div>-----</div></div>		<table><tr><th rowspan="2">Output Voltage [V]</th><th colspan="3">Load Current [A]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>24.00</td><td>3.12</td><td>3.10</td><td>3.08</td></tr><tr><td>22.80</td><td>3.12</td><td>3.10</td><td>3.08</td></tr><tr><td>21.60</td><td>3.12</td><td>3.10</td><td>3.10</td></tr><tr><td>19.20</td><td>3.12</td><td>3.11</td><td>3.08</td></tr><tr><td>16.80</td><td>3.12</td><td>3.10</td><td>3.08</td></tr><tr><td>14.40</td><td>3.12</td><td>3.11</td><td>3.09</td></tr><tr><td>12.00</td><td>3.12</td><td>3.11</td><td>3.09</td></tr><tr><td>9.60</td><td>3.12</td><td>3.11</td><td>3.08</td></tr><tr><td>7.20</td><td>3.12</td><td>3.10</td><td>3.07</td></tr><tr><td>4.80</td><td>3.10</td><td>3.09</td><td>3.05</td></tr><tr><td>2.40</td><td>3.06</td><td>3.04</td><td>3.01</td></tr><tr><td>0.00</td><td>3.13</td><td>3.16</td><td>3.24</td></tr></table>		Output Voltage [V]	Load Current [A]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	24.00	3.12	3.10	3.08	22.80	3.12	3.10	3.08	21.60	3.12	3.10	3.10	19.20	3.12	3.11	3.08	16.80	3.12	3.10	3.08	14.40	3.12	3.11	3.09	12.00	3.12	3.11	3.09	9.60	3.12	3.11	3.08	7.20	3.12	3.10	3.07	4.80	3.10	3.09	3.05	2.40	3.06	3.04	3.01	0.00	3.13	3.16	3.24
Output Voltage [V]	Load Current [A]																																																									
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																							
24.00	3.12	3.10	3.08																																																							
22.80	3.12	3.10	3.08																																																							
21.60	3.12	3.10	3.10																																																							
19.20	3.12	3.11	3.08																																																							
16.80	3.12	3.10	3.08																																																							
14.40	3.12	3.11	3.09																																																							
12.00	3.12	3.11	3.09																																																							
9.60	3.12	3.11	3.08																																																							
7.20	3.12	3.10	3.07																																																							
4.80	3.10	3.09	3.05																																																							
2.40	3.06	3.04	3.01																																																							
0.00	3.13	3.16	3.24																																																							
Note: Slanted line shows the range of the rated load current.																																																										
(注)斜線は定格負荷電流範囲を示す。																																																										

COSEL


Model LCA50S-24

Item Overvoltage Protection
過電圧保護

Object +24.0V2.5A

Testing Circuitry Figure A

1. Graph

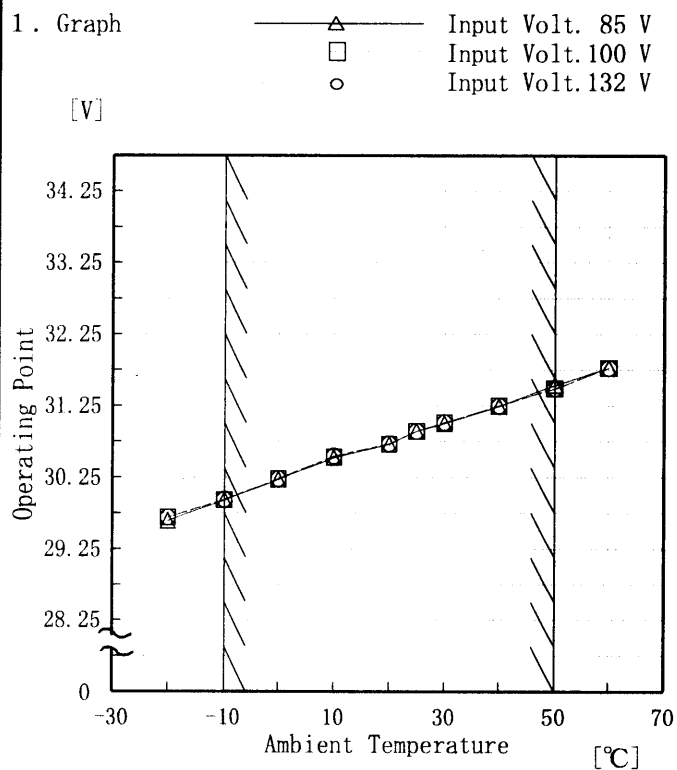


2. Values


Ambient Temperature [°C]	Operating Point [V]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
-20	29.64	29.69	29.69
-10	29.93	29.93	29.94
0	30.22	30.23	30.23
10	30.52	30.53	30.54
20	30.71	30.71	30.72
25	30.89	30.89	30.89
30	31.00	31.01	31.01
40	31.24	31.25	31.25
50	31.54	31.49	31.49
60	31.78	31.78	31.78
—	—	—	—


COSEL

Model	LCA50S-24	Temperature	25°C
Item	Inrush Current 突入電流	Testing Circuitry	Figure A
Object	_____		

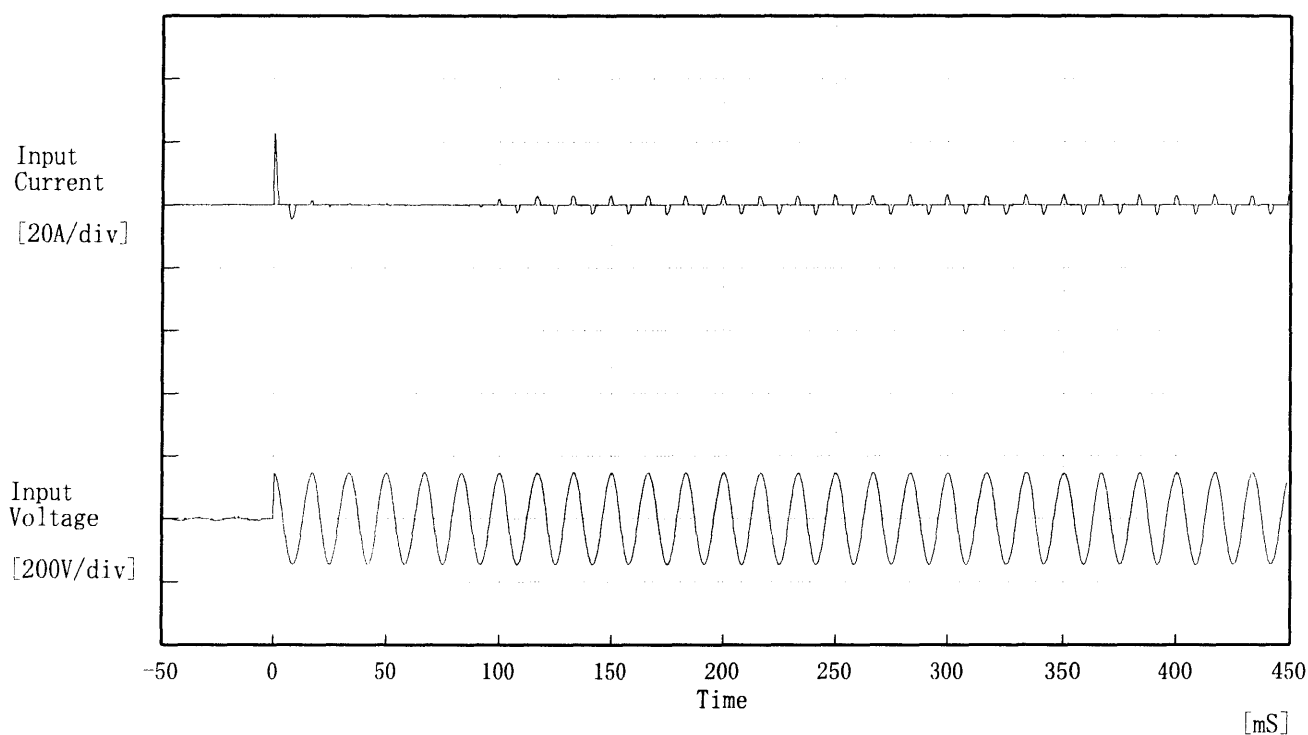

Input Voltage 100 V
 Frequency 60 Hz
 Load 100 %
 Inrush Current
 ① 22.45 [A]
 ② 3.25 [A]

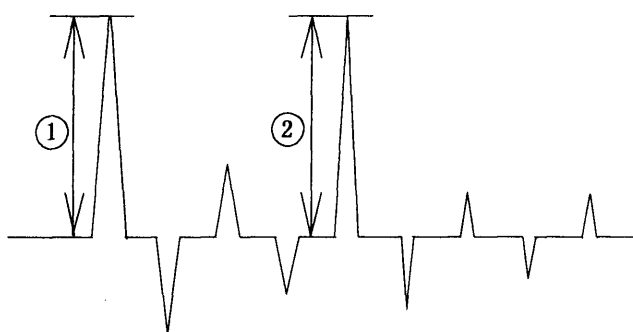

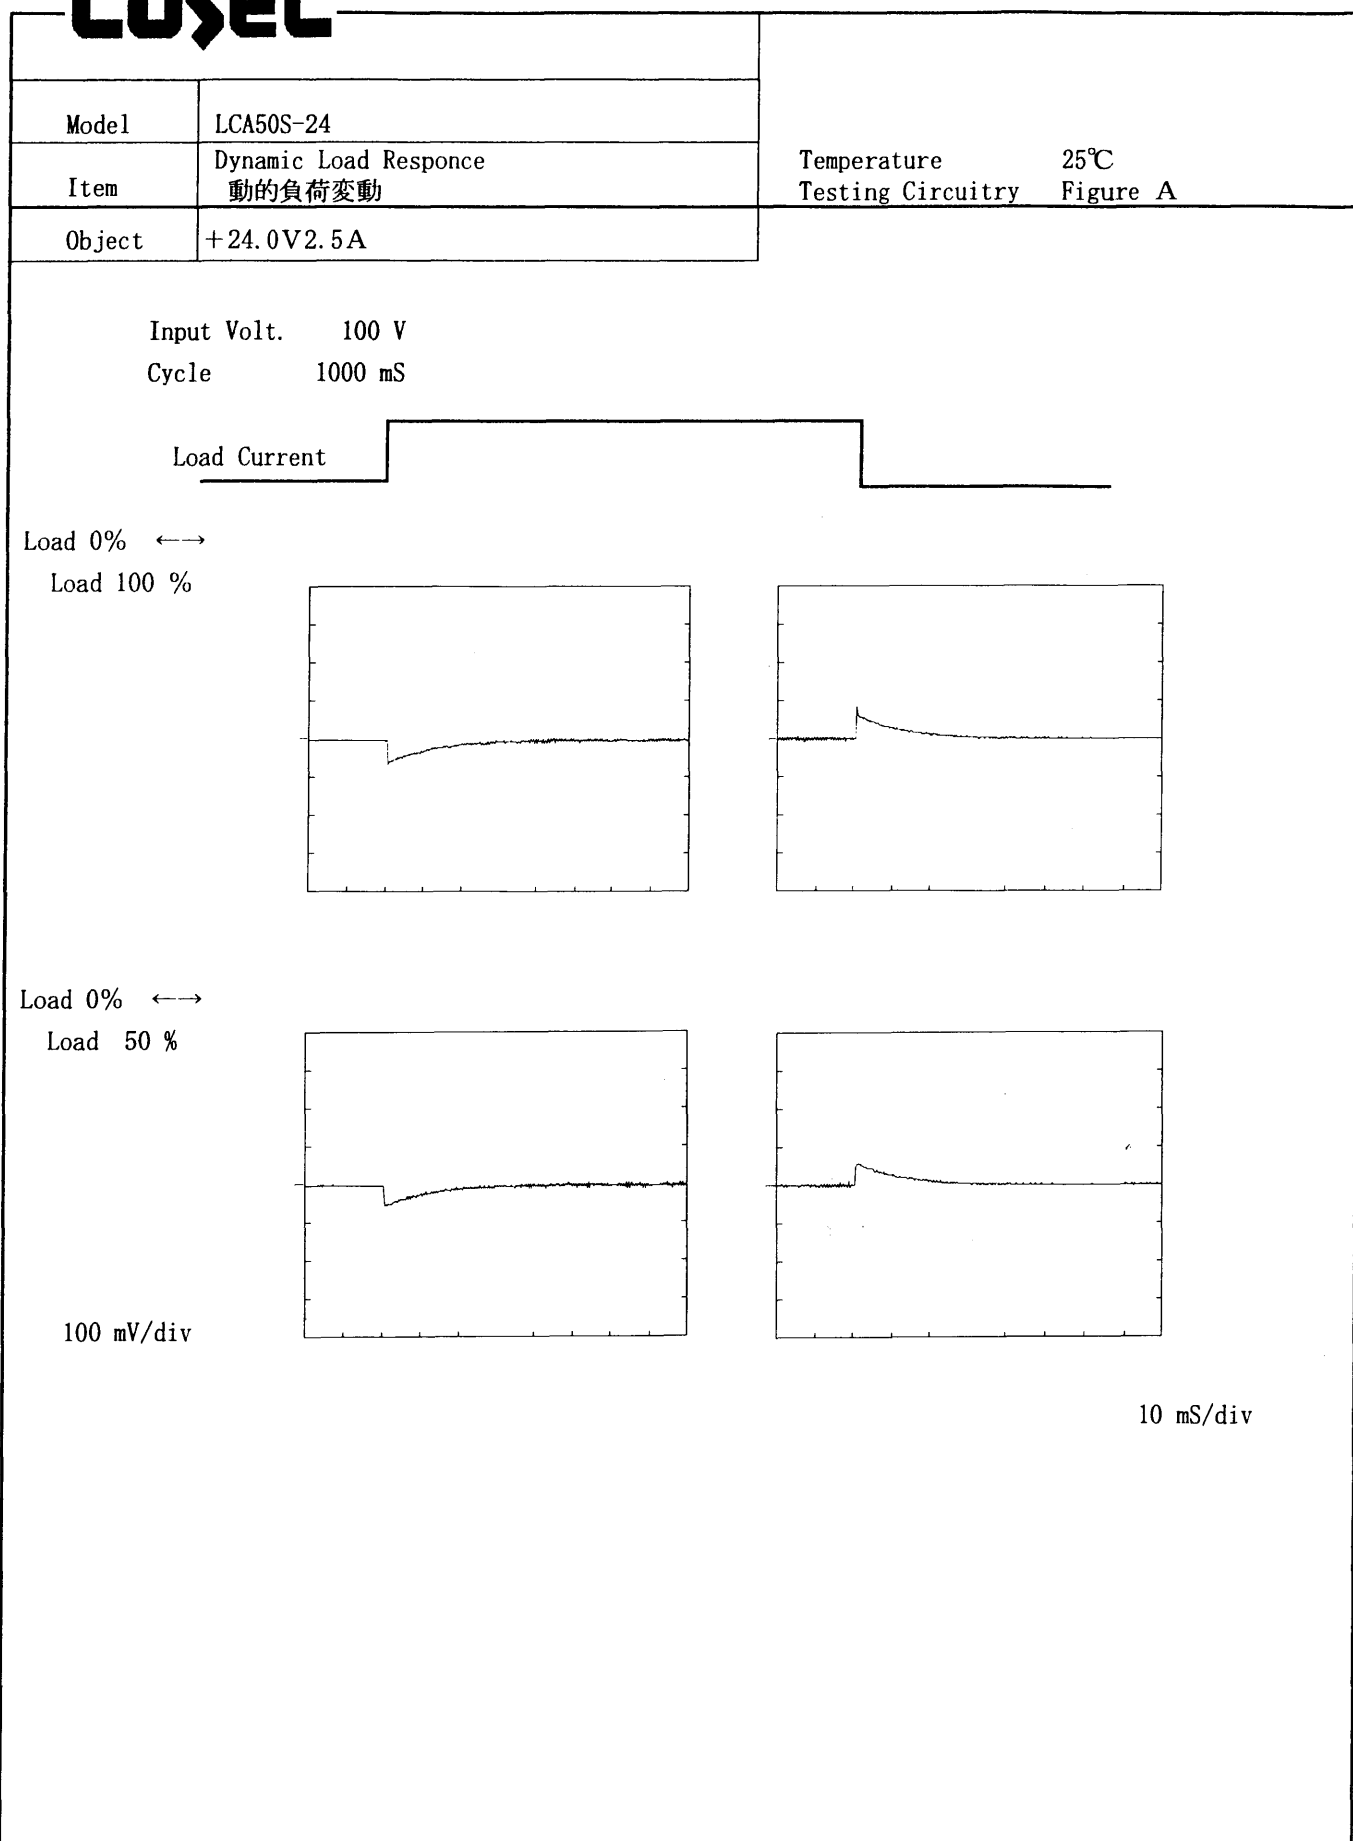
COSEL

COSEL

Model	LCA50S-24	Temperature Testing Circuitry	25°C Figure A
Item	Rise and Fall Time 立上り、立下り時間		
Object	+24.0V2.5A		

1. Graph


Input Volt. 85 V

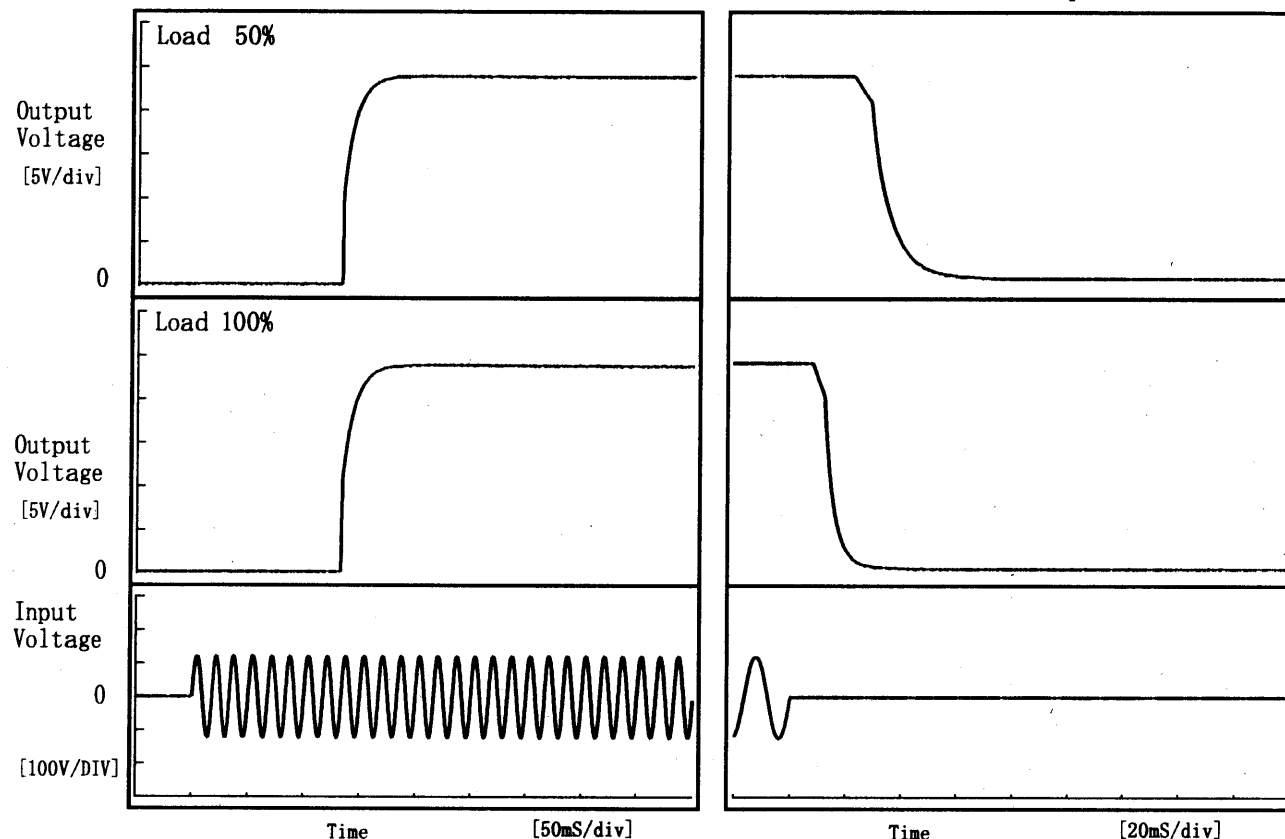

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	132.8	20.8	153.5	27.9	19.2
100 %	132.5	20.8	153.3	11.4	9.8

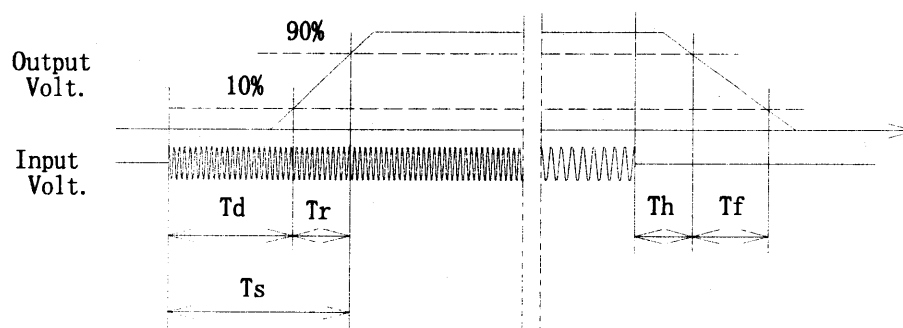

COSEL


Model LCA50S-24

Item Ambient Temperature Drift
周囲温度変動

Object +24.0V2.5A

Testing Circuitry Figure A

1. Graph

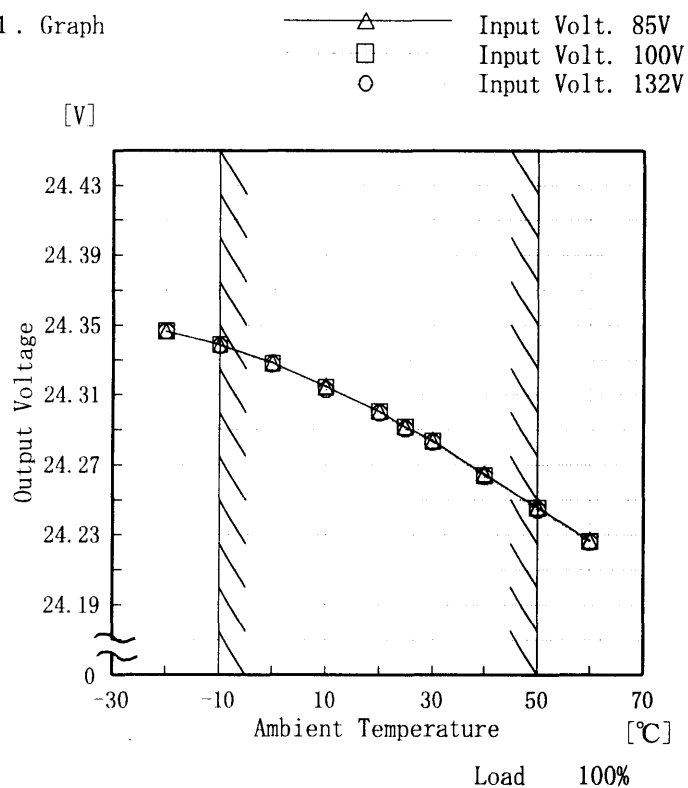

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

2. Values

Temperature [°C]	Output Voltage [V]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
-20	24.346	24.347	24.346
-10	24.339	24.339	24.338
0	24.328	24.328	24.327
10	24.315	24.314	24.313
20	24.301	24.300	24.300
25	24.292	24.292	24.291
30	24.284	24.283	24.283
40	24.265	24.264	24.263
50	24.246	24.245	24.244
60	24.226	24.226	24.226
—	—	—	—

COSEL


Model LCA50S-24

Item Minimum Input Voltage for Regulated Output Voltage
最低レギュレーション電圧

Object +24.0V2.5A

Testing Circuitry Figure A

1. Graph

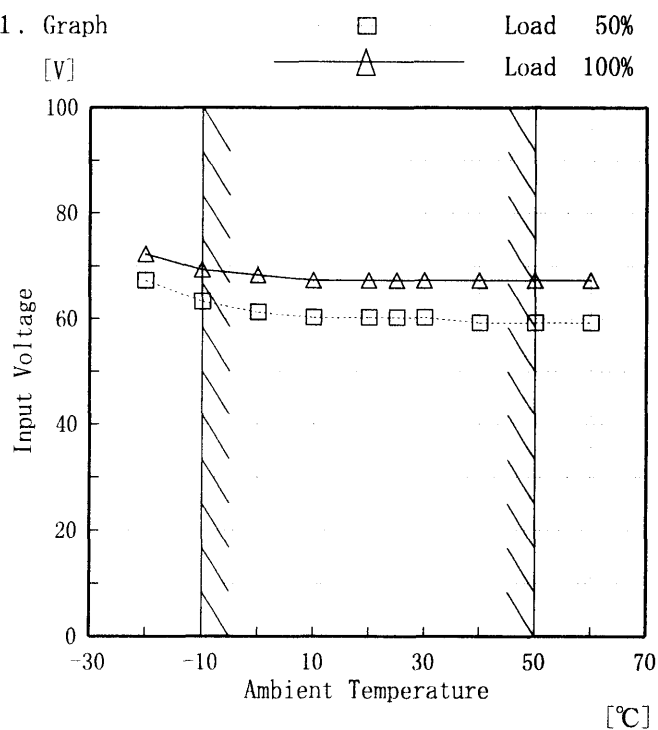

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。


2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-20	67	72
-10	63	69
0	61	68
10	60	67
20	60	67
25	60	67
30	60	67
40	59	67
50	59	67
60	59	67
—	—	—

COSEL

Model		LCA50S-24	Testing Circuitry	Figure A																																				
Item		Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)																																						
Object		+24.0V 2.5A																																						
1. Graph			2. Values																																					
<div><div>□ Load 50%</div><div>—△— Load 100%</div></div> <p>Input Volt. 100 V</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注) 斜線は定格周囲温度範囲を示す。</p>			<table><tr><th>Ambient Temp. [°C]</th><th>Load 50% Ripple Output Volt. [mV]</th><th>Load 100% Ripple Output Volt. [mV]</th></tr><tr><td>-20</td><td>50</td><td>55</td></tr><tr><td>-10</td><td>40</td><td>40</td></tr><tr><td>0</td><td>35</td><td>40</td></tr><tr><td>10</td><td>30</td><td>35</td></tr><tr><td>20</td><td>20</td><td>30</td></tr><tr><td>25</td><td>20</td><td>30</td></tr><tr><td>30</td><td>20</td><td>25</td></tr><tr><td>40</td><td>15</td><td>20</td></tr><tr><td>50</td><td>15</td><td>20</td></tr><tr><td>60</td><td>15</td><td>15</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>		Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]	-20	50	55	-10	40	40	0	35	40	10	30	35	20	20	30	25	20	30	30	20	25	40	15	20	50	15	20	60	15	15	—	—	—
Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]																																						
-20	50	55																																						
-10	40	40																																						
0	35	40																																						
10	30	35																																						
20	20	30																																						
25	20	30																																						
30	20	25																																						
40	15	20																																						
50	15	20																																						
60	15	15																																						
—	—	—																																						

COSEL

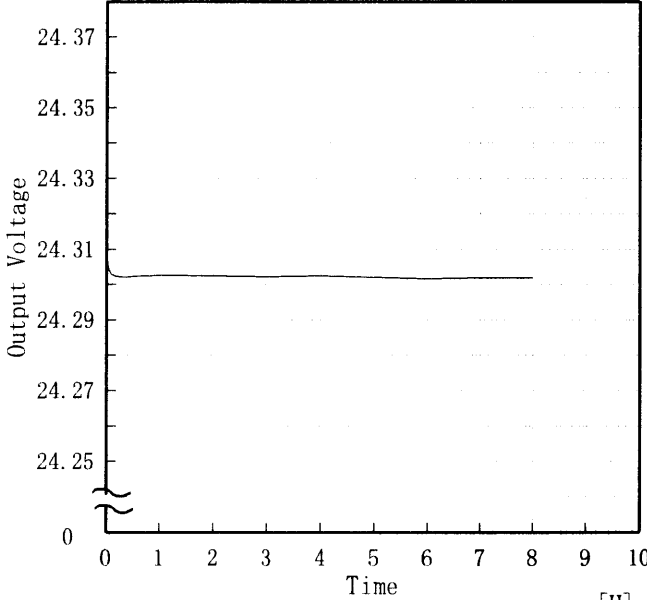COSEL																									
Model	LCA50S-24	Temperature 25℃ Testing Circuitry Figure A																							
Item	Time Lapse Drift 経時ドリフト																								
Object	+24.0V2.5A																								
1. Graph		2.Values																							
<div>[V]</div> <div></div> <div>Input Volt. 100V Load 100%</div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>24.313</td></tr><tr><td>0.5</td><td>24.302</td></tr><tr><td>1.0</td><td>24.303</td></tr><tr><td>2.0</td><td>24.302</td></tr><tr><td>3.0</td><td>24.302</td></tr><tr><td>4.0</td><td>24.302</td></tr><tr><td>5.0</td><td>24.302</td></tr><tr><td>6.0</td><td>24.302</td></tr><tr><td>7.0</td><td>24.302</td></tr><tr><td>8.0</td><td>24.302</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	24.313	0.5	24.302	1.0	24.303	2.0	24.302	3.0	24.302	4.0	24.302	5.0	24.302	6.0	24.302	7.0	24.302	8.0	24.302
Time since start [H]	Output Voltage [V]																								
0.0	24.313																								
0.5	24.302																								
1.0	24.303																								
2.0	24.302																								
3.0	24.302																								
4.0	24.302																								
5.0	24.302																								
6.0	24.302																								
7.0	24.302																								
8.0	24.302																								

COSEL

Model		LCA50S-24	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+24.0V2.5A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 85~132 V

Load Current : 0~2.5 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 85~132 V

負荷電流 0~2.5 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ration) [%]
Maximum Voltage	-10	132	0.0	24.346	±52	±0.3
Minimum Voltage	50	132	2.5	24.244		

COSEL

Model		LCA50S-24	Temperature 25°C Testing Circuitry Figure B
Item		Leakage Current 漏洩電流	
Object		_____	

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	0.16	0.20	0.25
(B) IEC60950	0.16	0.21	0.26

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	—	—	—

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力 of 両相について測定し、その大きい方を漏洩電流測定値とする。

COSEL

Model	LCA50S-24		
Item	Line Noise Tolerance 入力雑音耐量	Temperature Testing Circuitry	25°C Figure C
Object	+24.0V 2.5A		

1. Results

Pulse Width [nS]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

2. Conditions

Input Voltage : 100 V
 Pulse Voltage : 2000 V
 Pulse Cycle : 10 mS
 Pulse Input Duration : 1 min. or more
 Load : 100 %

COSEL

Model	LCA50S-24	Temperature Testing Circuitry	25°C Figure D
Item	Conducted Emission 雑音端子電圧		
Object			

1. Graph

Remarks


Input Volt. 100 V (VCCI Class B)

120 V (FCC Class B)


Load 100 %

規格 1: [VCCI] Class B(平均値)

規格 2: [VCCI] Class B(QP)

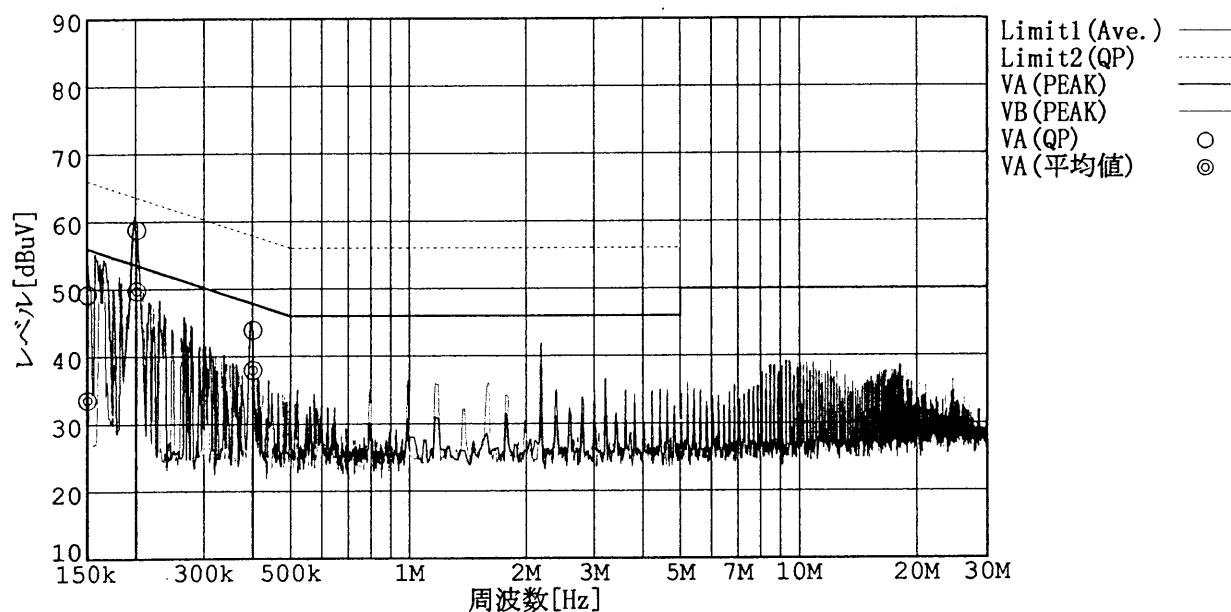

規格 1: [FCC Part15] Class B

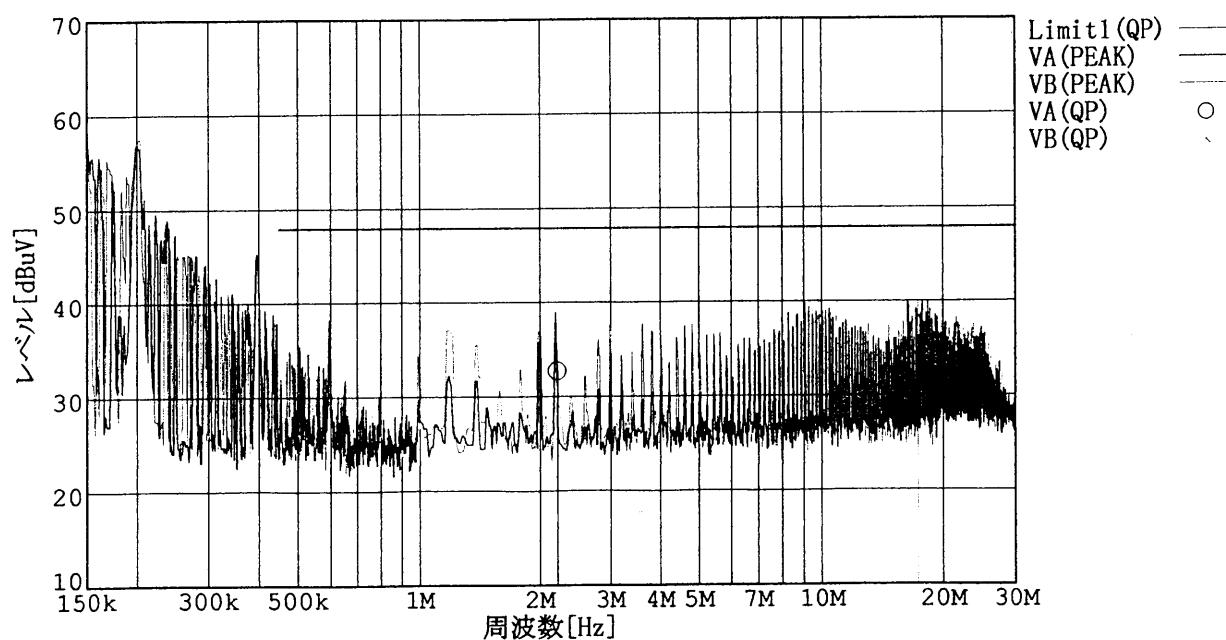

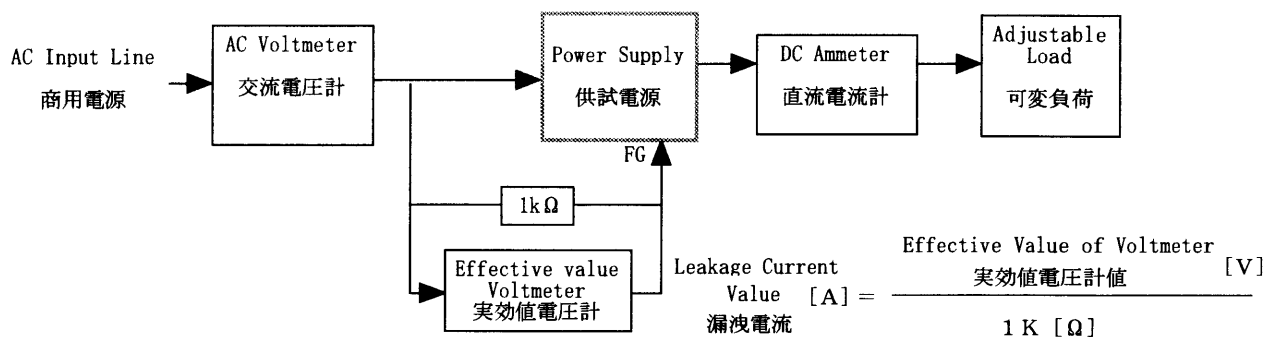
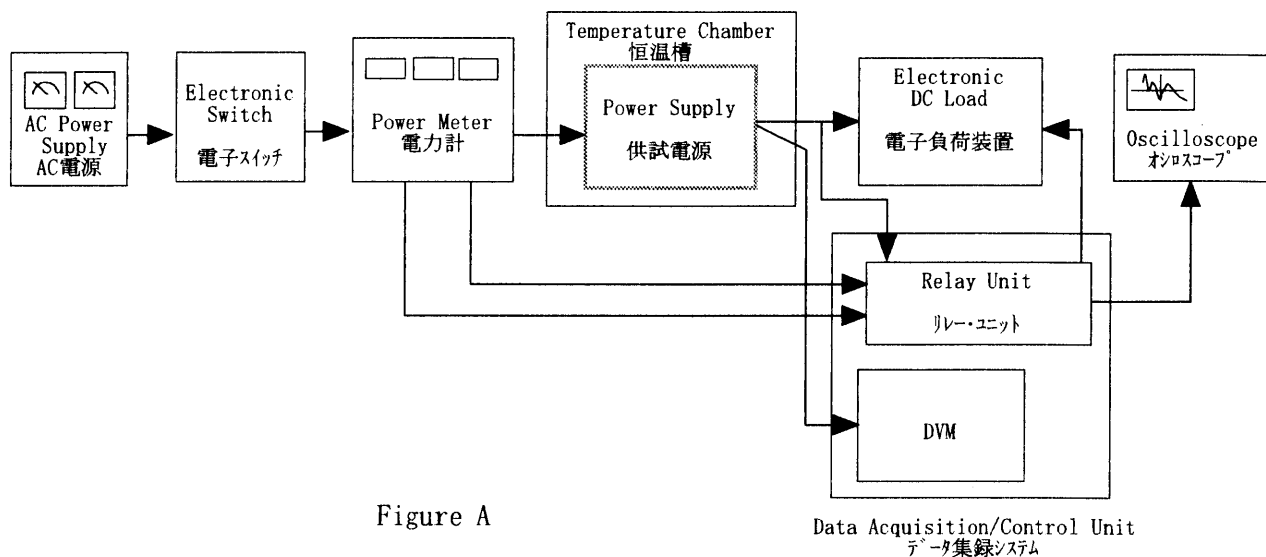


Figure B (DENTORI)

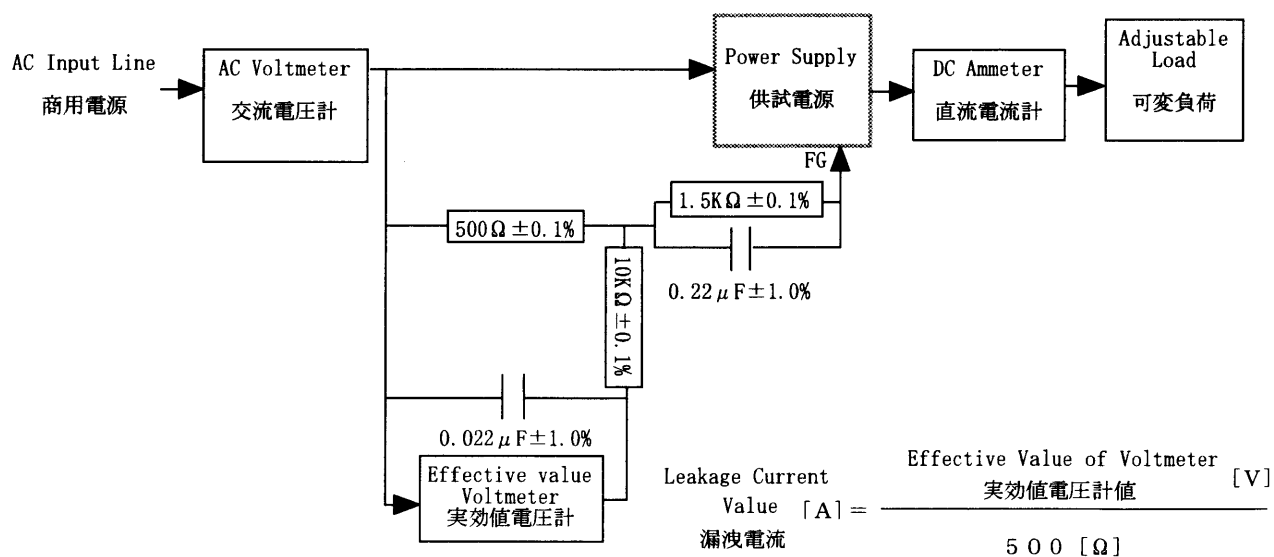


Figure B (IEC 60950)

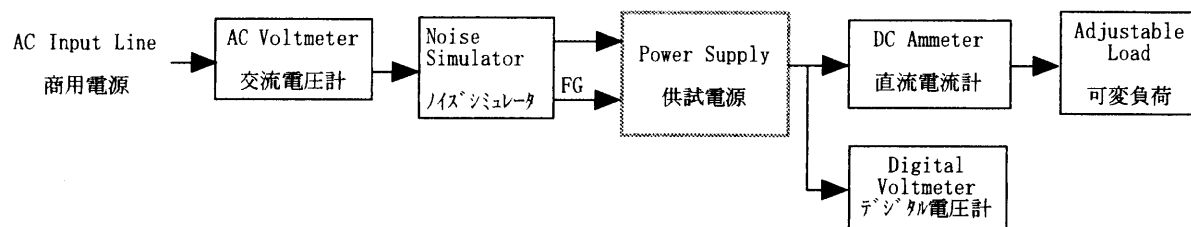


Figure C

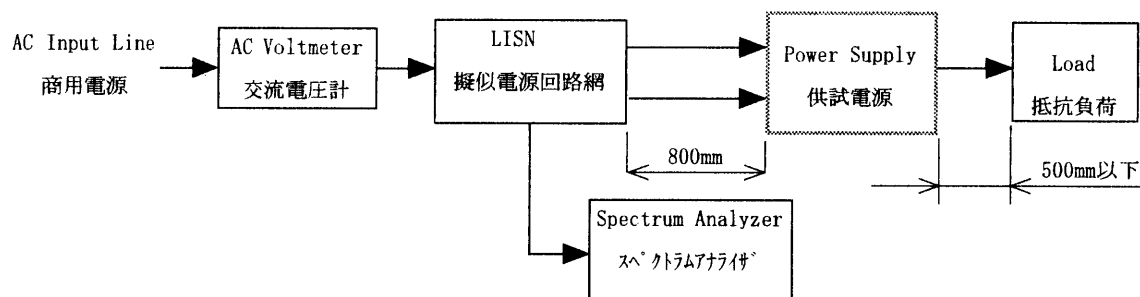


Figure D

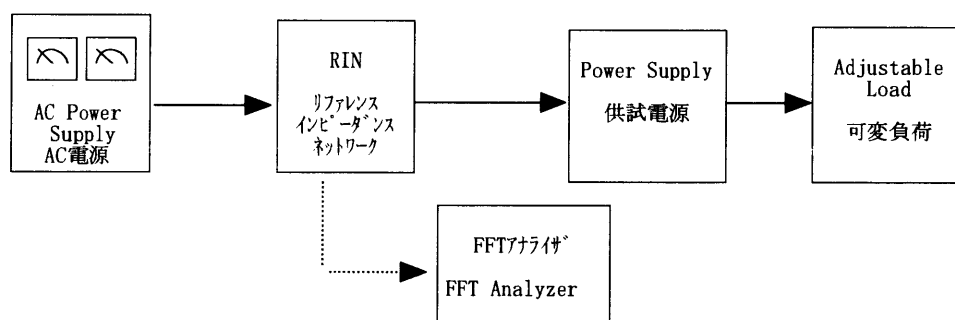


Figure E