



TEST DATA OF LCA75S-5 (100V INPUT)

Regulated DC Power Supply

Date : Aug. 11. 1999

Approved by : H. Yamaguchi
Design Manager

Prepared by : S. Taniguchi
Design Engineer

コーセル株式会社

COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Input Current (by Load Current)	2
入力電流 (負荷特性)	
3. Input Power (by Load Current)	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage)	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current)	5
効率 (負荷特性)	
6. Hold-Up Time	6
出力保持時間	
7. Instantaneous Interruption Compensation	7
瞬時停電保障	
8. Load Regulation	8
静的負荷変動	
9. Ripple Voltage (by Load Current)	9
リップル電圧 (負荷特性)	
10. Ripple-Noise	10
リップルノイズ	
11. Overcurrent Protection	11
過電流保護	
12. Overvoltage Protection	12
過電圧保護	
13. Inrush Current	13
突入電流	
14. Dynamic Load Responce	14
動的負荷変動	
15. Rise and Fall Time	15
立上り、立下がり時間	
16. Ambient Temperature Drift	16
周囲温度変動	
17. Minimum Input Voltage for Regulated Output Voltage .	17
最低レギュレーション電圧	
18. Ripple Voltage (by Ambient Temperature)	18
リップル電圧 (周囲温度特性)	
19. Time Lapse Drift	19
経時ドリフト	
20. Output Voltage Accuracy	20
定電圧精度	
21. Condensation	21
結露特性	
22. Leakage Current	22
漏洩電流	
23. Line Noise Tolerance	23
入力雑音耐量	
24. Conducted Emission	24
雑音端子電圧	
25. Figure of Testing Circuitry	25
測定回路図	

(Final Page 26)

COSEL

COSEL																																			
Model	LCA75S-5	Temperature	25℃																																
Item	Line Regulation 静的入力変動	Testing Circuitry	Figure A																																
Object	+5.0V15A																																		
1. Graph		2. Values																																	
<div><div>□ Load 50%</div><div>△ Load 100%</div></div> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>		<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Output Voltage [V]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>75</td><td>5.179</td><td>5.175</td></tr><tr><td>80</td><td>5.179</td><td>5.175</td></tr><tr><td>85</td><td>5.179</td><td>5.176</td></tr><tr><td>90</td><td>5.179</td><td>5.176</td></tr><tr><td>100</td><td>5.179</td><td>5.176</td></tr><tr><td>110</td><td>5.179</td><td>5.176</td></tr><tr><td>120</td><td>5.179</td><td>5.176</td></tr><tr><td>132</td><td>5.179</td><td>5.176</td></tr><tr><td>140</td><td>5.179</td><td>5.176</td></tr></table>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	75	5.179	5.175	80	5.179	5.175	85	5.179	5.176	90	5.179	5.176	100	5.179	5.176	110	5.179	5.176	120	5.179	5.176	132	5.179	5.176	140	5.179	5.176
Input Voltage [V]	Output Voltage [V]																																		
	Load 50%	Load 100%																																	
75	5.179	5.175																																	
80	5.179	5.175																																	
85	5.179	5.176																																	
90	5.179	5.176																																	
100	5.179	5.176																																	
110	5.179	5.176																																	
120	5.179	5.176																																	
132	5.179	5.176																																	
140	5.179	5.176																																	

COSEL

Model		LCA75S-5		Temperature		25℃	
Item		Input Current (by Load Current) 入力電流（負荷特性）		Testing Circuitry		Figure A	
Output		_____					
1. Graph				2. Values			

△

Input Volt. 85V

□

Input Volt. 100V

○

Input Volt. 132V

Input Current [A]

Load Current [A]

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。

Load Current [A]	Input Current [A]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
0.0	0.061	0.065	0.071
3.0	0.467	0.426	0.370
6.0	0.831	0.743	0.620
9.0	1.207	1.069	0.880
12.0	1.587	1.402	1.142
15.0	1.973	1.738	1.412
16.5	2.172	1.911	1.551
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

COSEL

Model		LCA75S-5		Temperature		25℃																																																								
Item		Input Power (by Load Current) 入力電力（負荷特性）		Testing Circuitry		Figure A																																																								
Output		_____																																																												
1. Graph				2. Values																																																										
<div><div><div>△</div><div>Input Volt. 85V</div></div><div><div>□</div><div>Input Volt. 100V</div></div><div><div>○</div><div>Input Volt. 132V</div></div></div> <div><div><div><div>[W]</div><div>200</div></div><div><div>150</div></div><div><div>100</div></div><div><div>50</div></div><div><div>0</div></div></div><div><div>Input Power</div></div><div><div>0</div><div>5</div><div>10</div><div>15</div><div>20</div></div><div><div>Load Current</div><div>[A]</div></div></div> <div>Note: Slanted line shows the range of the rated load current</div> <div>(注)斜線は定格負荷電流範囲を示す。</div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Power [W]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>0.0</td><td>1.84</td><td>2.24</td><td>3.10</td></tr><tr><td>3.0</td><td>21.40</td><td>21.90</td><td>23.50</td></tr><tr><td>6.0</td><td>39.96</td><td>40.36</td><td>41.60</td></tr><tr><td>9.0</td><td>59.13</td><td>59.22</td><td>60.30</td></tr><tr><td>12.0</td><td>79.00</td><td>78.86</td><td>79.40</td></tr><tr><td>15.0</td><td>99.80</td><td>99.20</td><td>99.40</td></tr><tr><td>16.5</td><td>110.70</td><td>109.80</td><td>109.70</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Input Power [W]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.0	1.84	2.24	3.10	3.0	21.40	21.90	23.50	6.0	39.96	40.36	41.60	9.0	59.13	59.22	60.30	12.0	79.00	78.86	79.40	15.0	99.80	99.20	99.40	16.5	110.70	109.80	109.70	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Power [W]																																																													
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																											
0.0	1.84	2.24	3.10																																																											
3.0	21.40	21.90	23.50																																																											
6.0	39.96	40.36	41.60																																																											
9.0	59.13	59.22	60.30																																																											
12.0	79.00	78.86	79.40																																																											
15.0	99.80	99.20	99.40																																																											
16.5	110.70	109.80	109.70																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											

COSEL

Model		LCA75S-5	
Item		Efficiency 効率	
Object			

1. Graph

□ Load 50%

△ Load 100%

Efficiency [%]

<

COSEL

Model		LCA75S-5		Temperature		25℃																																																								
Item		Efficiency (by Load Current) 効率 (負荷電流特性)		Testing Circuitry		Figure A																																																								
Output		_____																																																												
1. Graph				2. Values																																																										
<div><div><div>△</div><div>□</div><div>○</div></div><div><div>Input Volt. 85V</div><div>Input Volt. 100V</div><div>Input Volt. 132V</div></div></div> <p>Efficiency [%]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Efficiency [%]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>3.0</td><td>73.1</td><td>71.6</td><td>66.8</td></tr><tr><td>6.0</td><td>78.1</td><td>77.4</td><td>75.1</td></tr><tr><td>9.0</td><td>78.8</td><td>78.8</td><td>77.4</td></tr><tr><td>12.0</td><td>78.5</td><td>78.7</td><td>78.2</td></tr><tr><td>15.0</td><td>77.8</td><td>78.3</td><td>78.2</td></tr><tr><td>16.5</td><td>77.2</td><td>77.9</td><td>78.0</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Efficiency [%]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	3.0	73.1	71.6	66.8	6.0	78.1	77.4	75.1	9.0	78.8	78.8	77.4	12.0	78.5	78.7	78.2	15.0	77.8	78.3	78.2	16.5	77.2	77.9	78.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Efficiency [%]																																																													
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																											
3.0	73.1	71.6	66.8																																																											
6.0	78.1	77.4	75.1																																																											
9.0	78.8	78.8	77.4																																																											
12.0	78.5	78.7	78.2																																																											
15.0	77.8	78.3	78.2																																																											
16.5	77.2	77.9	78.0																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											

COSEL

Model		LCA75S-5		Temperature		25°C																																	
Item		Hold-Up Time 出力保持時間		Testing Circuitry		Figure A																																	
Object		+5.0V15A																																					
1. Graph				2. Values																																			
<div><div>□ Load 50%</div><div>—△— Load 100%</div><div>[mS]</div><div><div>Hold-Up Time</div><div>Input Voltage [V]</div></div></div>				<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Hold-Up Time [mS]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>75</td><td>20</td><td>7</td></tr><tr><td>80</td><td>27</td><td>10</td></tr><tr><td>85</td><td>35</td><td>14</td></tr><tr><td>90</td><td>43</td><td>18</td></tr><tr><td>100</td><td>61</td><td>27</td></tr><tr><td>110</td><td>81</td><td>37</td></tr><tr><td>120</td><td>103</td><td>48</td></tr><tr><td>132</td><td>132</td><td>62</td></tr><tr><td>140</td><td>153</td><td>73</td></tr></table>				Input Voltage [V]	Hold-Up Time [mS]		Load 50%	Load 100%	75	20	7	80	27	10	85	35	14	90	43	18	100	61	27	110	81	37	120	103	48	132	132	62	140	153	73
Input Voltage [V]	Hold-Up Time [mS]																																						
	Load 50%	Load 100%																																					
75	20	7																																					
80	27	10																																					
85	35	14																																					
90	43	18																																					
100	61	27																																					
110	81	37																																					
120	103	48																																					
132	132	62																																					
140	153	73																																					
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。</p> <p>(注) 斜線は定格入力電圧範囲を示す。</p>																																							

COSEL

Model	LCA75S-5	Temperature	25°C
Item	Instantaneous Interruption Compensation 瞬時停電保障	Testing Circuitry	Figure A
Object	+5.0V15A		

1. Graph

△

 Input Volt. 85 V

□

 Input Volt. 100 V

○

 Input Volt. 132 V

[mS]

1000

Instantaneous Compensation Time

100

10

1

0

5

10

15

20

[A]

Load Current

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated load current.

瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。

(注) 斜線は定格負荷電流範囲を示す。

2. Values

Load Current [A]	Time [mS]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
0.0	—	—	—
3.0	72	138	273
6.0	37	70	155
9.0	22	45	105
12.0	13	31	77
15.0	10	22	56
16.5	5	20	48
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

COSEL

Model		LCA75S-5		Temperature		25℃																																																
Item		Load Regulation 静的負荷変動		Testing Circuitry		Figure A																																																
Object		+5.0V15A																																																				
1. Graph				2. Values																																																		
<div><div><div>—△—</div><div>Input Volt. 85 V</div></div><div><div>—□—</div><div>Input Volt. 100 V</div></div><div><div>—○—</div><div>Input Volt. 132 V</div></div></div> <div><div><div>Output Voltage [V]</div><div><div>Load Current [A]</div></div></div></div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>0.0</td><td>5.183</td><td>5.183</td><td>5.183</td></tr><tr><td>3.0</td><td>5.178</td><td>5.181</td><td>5.181</td></tr><tr><td>6.0</td><td>5.180</td><td>5.180</td><td>5.180</td></tr><tr><td>9.0</td><td>5.179</td><td>5.179</td><td>5.179</td></tr><tr><td>12.0</td><td>5.177</td><td>5.177</td><td>5.177</td></tr><tr><td>15.0</td><td>5.176</td><td>5.176</td><td>5.176</td></tr><tr><td>16.5</td><td>5.175</td><td>5.175</td><td>5.175</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Output Voltage [V]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.0	5.183	5.183	5.183	3.0	5.178	5.181	5.181	6.0	5.180	5.180	5.180	9.0	5.179	5.179	5.179	12.0	5.177	5.177	5.177	15.0	5.176	5.176	5.176	16.5	5.175	5.175	5.175	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																			
0.0	5.183	5.183	5.183																																																			
3.0	5.178	5.181	5.181																																																			
6.0	5.180	5.180	5.180																																																			
9.0	5.179	5.179	5.179																																																			
12.0	5.177	5.177	5.177																																																			
15.0	5.176	5.176	5.176																																																			
16.5	5.175	5.175	5.175																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			
<div>Note: Slanted line shows the range of the rated load current.</div> <div>(注)斜線は定格負荷電流範囲を示す。</div>																																																						

—8—

BC-4054

COSEL

Model		LCA75S-5	
Item		Ripple Voltage (by Load Current) リップル電圧 (負荷電流特性)	
Object		+5.0V15A	

1. Graph

-----□----- Input Volt. 85V

-----△----- Input Volt. 132V

[mV]

150

125

100

75

50

25

0

Ripple Voltage

0

5

10

15

20

Load Current

[A]

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p - p 値で示される。

(注)斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
入力商用周期

T2: Due to Switching
スイッチング周期

Ripple [mVp-p]

T1

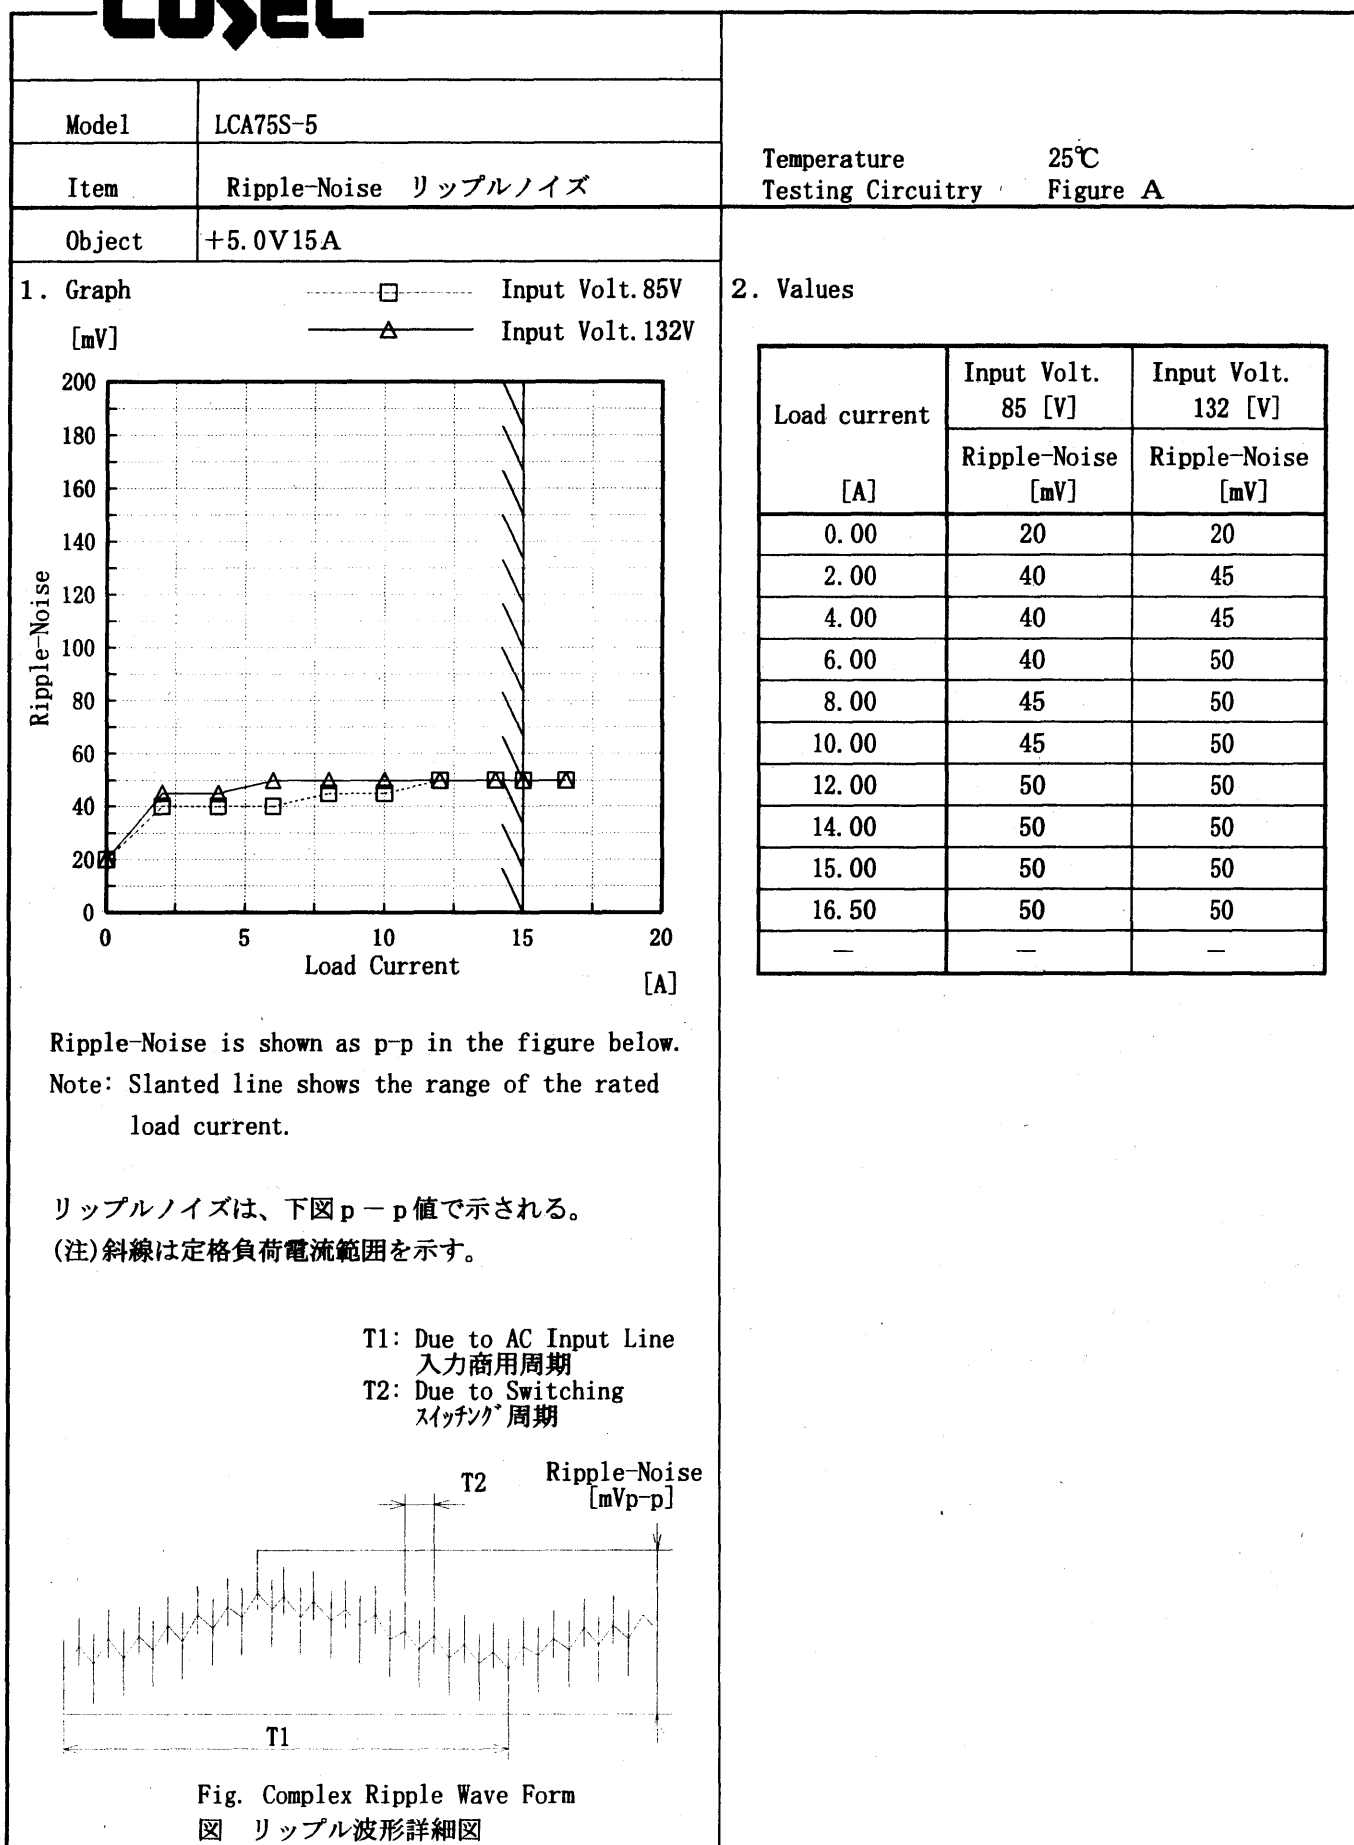
T2

Fig. Complex Ripple Wave Form

図 リップル波形詳細図

2.Values

Load Current	Input Volt. 85 [V]	Input Volt. 132 [V]
[A]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.00	15	10
2.00	30	30
4.00	30	30
6.00	30	35
8.00	35	35
10.00	35	35
12.00	35	35
14.00	40	35
15.00	40	40
16.50	40	40
—	—	—

COSEL

COSEL

Model		LCA75S-5	Temperature25℃ Testing Circuitry Figure A																																																								
Item		Overcurrent Protection 過電流保護																																																									
Object		+5.0V15A																																																									
1. Graph		<div><div>-----</div>Input Volt. 85 V</div> <div><div>—————</div>Input Volt. 100 V</div> <div><div>—————</div>Input Volt. 132 V</div> <div><div><div>Output Voltage [V]</div><div><div>8.0</div><div>6.0</div><div>4.0</div><div>2.0</div><div>0.0</div></div><div><div>0</div><div>5</div><div>10</div><div>15</div><div>20</div></div><div>Load Current [A]</div></div></div>	2. Values																																																								
			<table><tr><td rowspan="2">Output Voltage [V]</td><td colspan="3">Load Current [A]</td></tr><tr><td>Input Volt. 85[V]</td><td>Input Volt. 100[V]</td><td>Input Volt. 132[V]</td></tr><tr><td>5.00</td><td>18.21</td><td>18.09</td><td>18.03</td></tr><tr><td>4.75</td><td>18.25</td><td>18.14</td><td>18.10</td></tr><tr><td>4.50</td><td>18.29</td><td>18.19</td><td>18.15</td></tr><tr><td>4.00</td><td>18.42</td><td>18.33</td><td>18.26</td></tr><tr><td>3.50</td><td>18.56</td><td>18.47</td><td>18.32</td></tr><tr><td>3.00</td><td>18.66</td><td>18.55</td><td>18.36</td></tr><tr><td>2.50</td><td>18.80</td><td>18.61</td><td>18.42</td></tr><tr><td>2.00</td><td>18.80</td><td>18.68</td><td>18.48</td></tr><tr><td>1.50</td><td>18.88</td><td>18.74</td><td>18.53</td></tr><tr><td>1.00</td><td>18.94</td><td>18.77</td><td>18.54</td></tr><tr><td>0.50</td><td>18.95</td><td>18.75</td><td>18.45</td></tr><tr><td>0.00</td><td>18.80</td><td>18.58</td><td>18.16</td></tr></table>		Output Voltage [V]	Load Current [A]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	5.00	18.21	18.09	18.03	4.75	18.25	18.14	18.10	4.50	18.29	18.19	18.15	4.00	18.42	18.33	18.26	3.50	18.56	18.47	18.32	3.00	18.66	18.55	18.36	2.50	18.80	18.61	18.42	2.00	18.80	18.68	18.48	1.50	18.88	18.74	18.53	1.00	18.94	18.77	18.54	0.50	18.95	18.75	18.45	0.00	18.80	18.58	18.16
Output Voltage [V]	Load Current [A]																																																										
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																								
5.00	18.21	18.09	18.03																																																								
4.75	18.25	18.14	18.10																																																								
4.50	18.29	18.19	18.15																																																								
4.00	18.42	18.33	18.26																																																								
3.50	18.56	18.47	18.32																																																								
3.00	18.66	18.55	18.36																																																								
2.50	18.80	18.61	18.42																																																								
2.00	18.80	18.68	18.48																																																								
1.50	18.88	18.74	18.53																																																								
1.00	18.94	18.77	18.54																																																								
0.50	18.95	18.75	18.45																																																								
0.00	18.80	18.58	18.16																																																								
Note: Slanted line shows the range of the rated load current.																																																											
(注)斜線は定格負荷電流範囲を示す。																																																											

-11-

BC-4054

COSEL

Model		LCA75S-5	
Item		Overvoltage Protection 過電圧保護	
Object		+5.0V15A	

1. Graph

△

□

○

Input Volt. 85 V


Input Volt. 100 V

Input Volt. 132 V


Operating Point [V]

COSEL

Model	LCA75S-5	Temperature 25°C Testing Circuitry Figure A
Item	Inrush Current 突入電流	
Object		

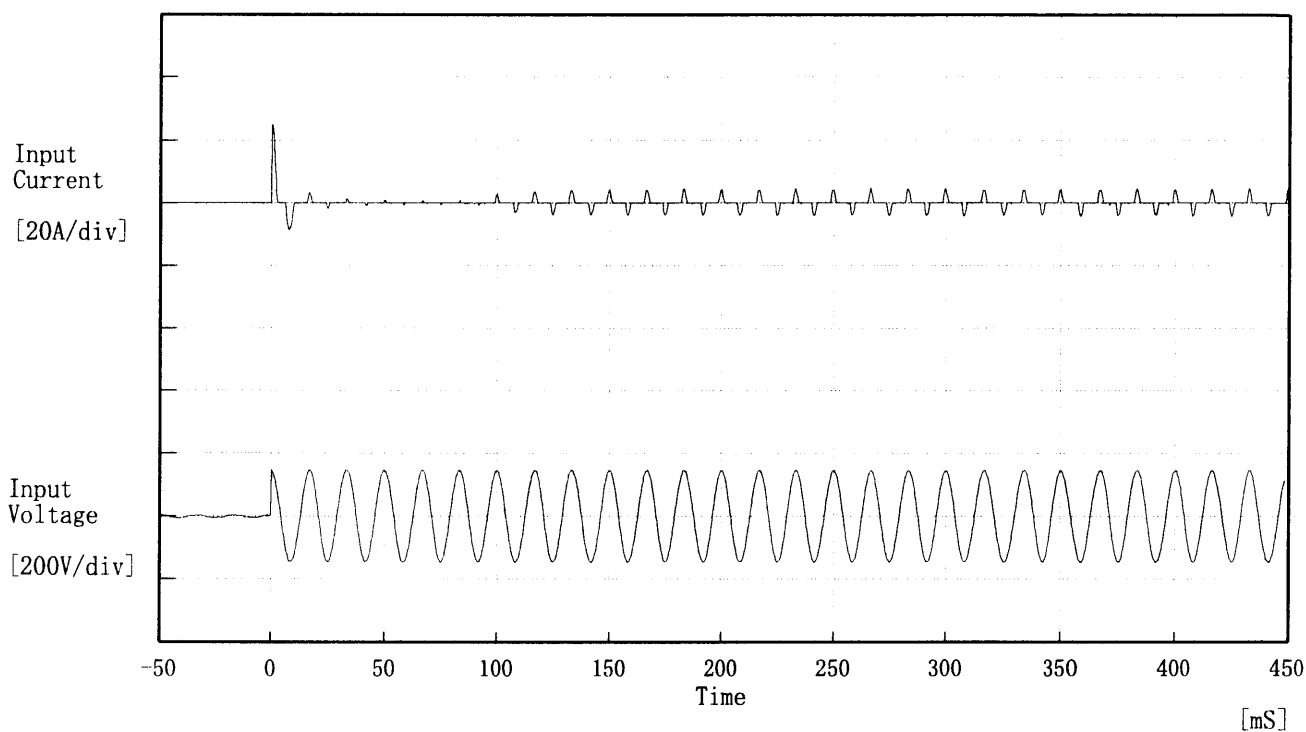

Input Voltage 100 V
Frequency 60 Hz
Load 100 %
Inrush Current
① 24.81 [A]
② 4.81 [A]

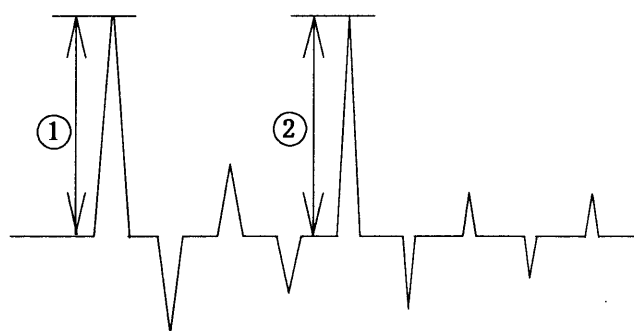


COSEL

Model	LCA75S-5		
Item	Dynamic Load Responce 動的負荷変動	Temperature	25°C
Object	+5.0V15A	Testing Circuitry	Figure A

Input Volt. 100 V



Cycle 1000 mS

Load Current





Load 0% ↔

Load 100 %

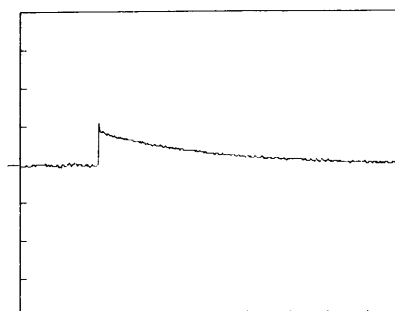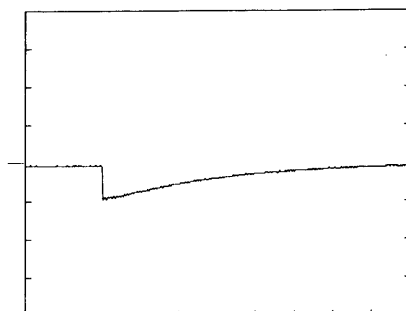

Load 0% ↔

Load 50 %

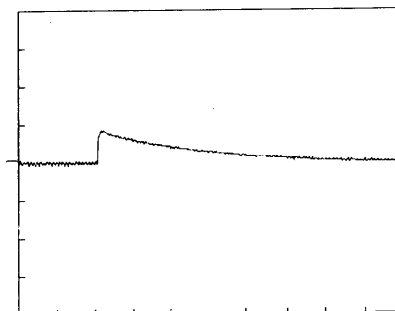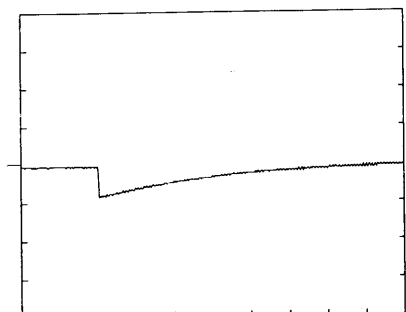

100 mV/div


10 mS/div

COSEL

Model	LCA75S-5	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+5.0V15A		

1. Graph


Input Volt. 85 V

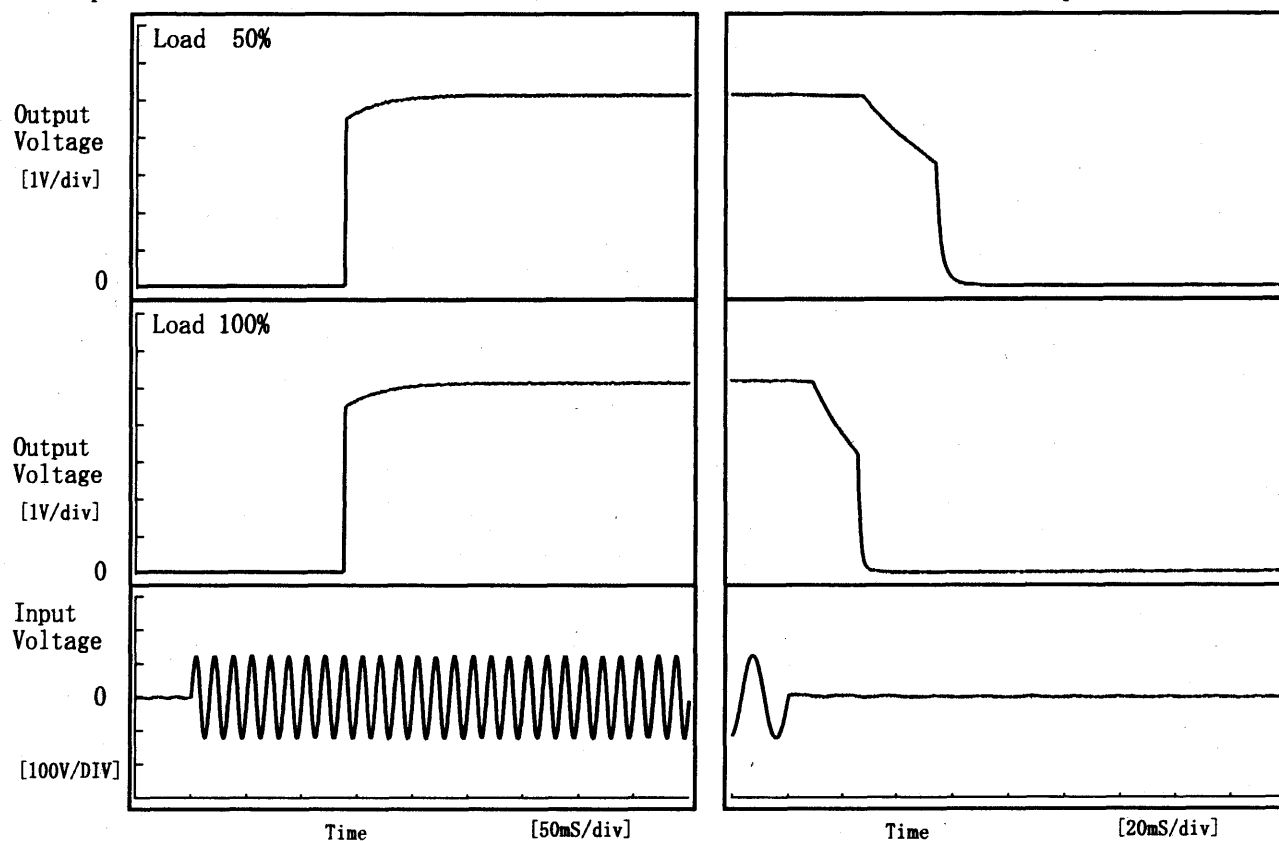

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	137.0	3.8	140.8	34.3	23.5
100 %	137.0	3.5	140.5	13.7	13.9

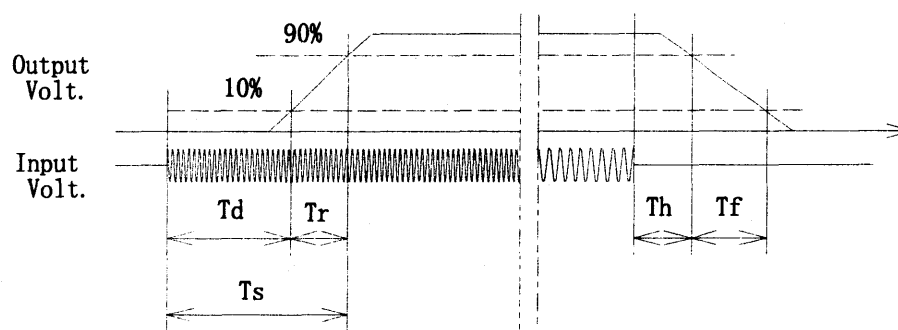

COSEL

COSEL			
Model		LCA75S-5	
Item		Ambient Temperature Drift 周囲温度変動	
Object		+5.0V15A	
1. Graph		2. Values	

△

Input Volt. 85V

□

Input Volt. 100V

○

Input Volt. 132V

Output Voltage

[V]

</

COSEL

Model

LCA75S-5

Item


Minimum Input Voltage for Regulated Output Voltage
最低レギュレーション電圧

Object

+5.0V15A

Testing Circuitry Figure A

1. Graph

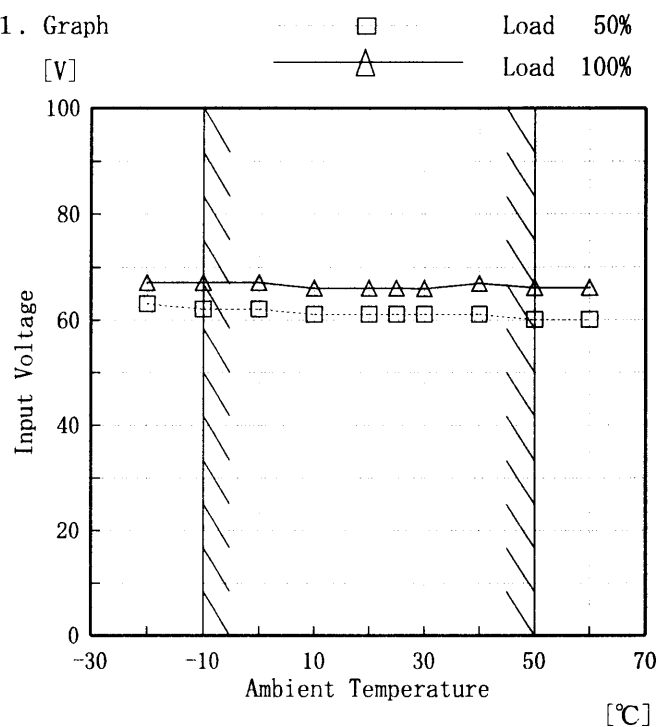

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。


2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-20	63	67
-10	62	67
0	62	67
10	61	66
20	61	66
25	61	66
30	61	66
40	61	67
50	60	66
60	60	66
—	—	—

COSEL

Model		LCA75S-5	Testing Circuitry	Figure A																																				
Item		Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)																																						
Object		+5.0V15A																																						
1. Graph			2. Values																																					
<div><div>□ Load 50%</div><div>—△— Load 100%</div></div> <p>Input Volt. 100 V</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注)斜線は定格周囲温度範囲を示す。</p>			<table><tr><th>Ambient Temp. [°C]</th><th>Load 50% Ripple Output Volt. [mV]</th><th>Load 100% Ripple Output Volt. [mV]</th></tr><tr><td>-20</td><td>70</td><td>80</td></tr><tr><td>-10</td><td>60</td><td>65</td></tr><tr><td>0</td><td>50</td><td>55</td></tr><tr><td>10</td><td>45</td><td>55</td></tr><tr><td>20</td><td>40</td><td>50</td></tr><tr><td>25</td><td>35</td><td>40</td></tr><tr><td>30</td><td>35</td><td>40</td></tr><tr><td>40</td><td>35</td><td>40</td></tr><tr><td>50</td><td>30</td><td>35</td></tr><tr><td>60</td><td>30</td><td>35</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>		Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]	-20	70	80	-10	60	65	0	50	55	10	45	55	20	40	50	25	35	40	30	35	40	40	35	40	50	30	35	60	30	35	—	—	—
Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]																																						
-20	70	80																																						
-10	60	65																																						
0	50	55																																						
10	45	55																																						
20	40	50																																						
25	35	40																																						
30	35	40																																						
40	35	40																																						
50	30	35																																						
60	30	35																																						
—	—	—																																						

COSEL

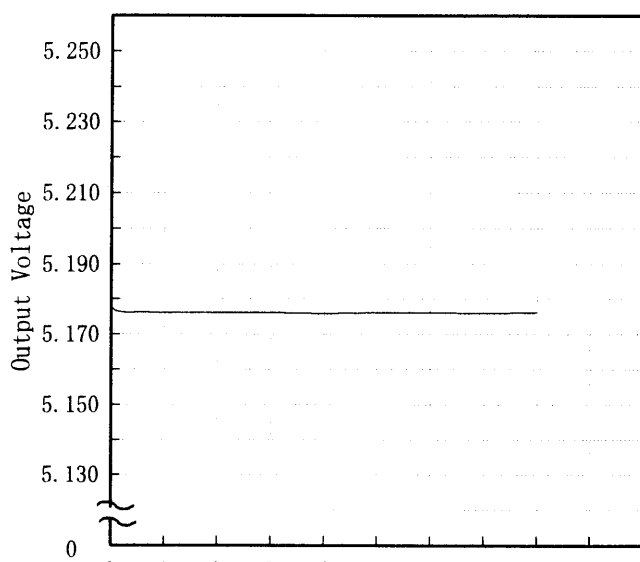COSEL																									
Model	LCA75S-5																								
Item	Time Lapse Drift 経時ドリフト	Temperature	25℃																						
Object	+5.0V15A	Testing Circuitry	Figure A																						
1. Graph		2.Values																							
<div>[V]</div> <div></div> <div>Output Voltage</div> <div>Time</div> <div>[H]</div> <div>Input Volt. 100V</div> <div>Load 100%</div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>5.178</td></tr><tr><td>0.5</td><td>5.176</td></tr><tr><td>1.0</td><td>5.176</td></tr><tr><td>2.0</td><td>5.176</td></tr><tr><td>3.0</td><td>5.176</td></tr><tr><td>4.0</td><td>5.176</td></tr><tr><td>5.0</td><td>5.176</td></tr><tr><td>6.0</td><td>5.176</td></tr><tr><td>7.0</td><td>5.176</td></tr><tr><td>8.0</td><td>5.176</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	5.178	0.5	5.176	1.0	5.176	2.0	5.176	3.0	5.176	4.0	5.176	5.0	5.176	6.0	5.176	7.0	5.176	8.0	5.176
Time since start [H]	Output Voltage [V]																								
0.0	5.178																								
0.5	5.176																								
1.0	5.176																								
2.0	5.176																								
3.0	5.176																								
4.0	5.176																								
5.0	5.176																								
6.0	5.176																								
7.0	5.176																								
8.0	5.176																								

COSEL

Model		LCA75S-5	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+5.0V15A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 85~132 V

Load Current : 0~15 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ratio) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 85~132 V

負荷電流 0~15 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ratio) [%]
Maximum Voltage	-10	100	0	5.183	±6	±0.2
Minimum Voltage	50	132	15	5.172		

COSEL

LOGEL

Model	LCA75S-5
Item	Condensation 結露特性
Object	+5.0V15A

Testing Circuitry Figure A

1. Condensation test

Testing procedure is as follows.

① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.

② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.

③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で－10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	5.18	Input Volt.: 100V, Load Current:15A
Line Regulation [mV]	4	Input Volt.: 85~132V, Load Current:15A
Load Regulation [mV]	10	Input Volt.: 100V, Load Current:0~15A

- 21 -

BC-4054

COSEL

Model	LCA75S-5	Temperature	25°C
Item	Leakage Current 漏洩電流	Testing Circuitry	Figure B
Object	_____		

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	0.17	0.19	0.25
(B) IEC60950	0.17	0.20	0.25

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	—	—	—

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力 of 両相について測定し、その大きい方を漏洩電流測定値とする。

COSEL

Model	LCA75S-5	Temperature 25°C Testing Circuitry Figure C
Item	Line Noise Tolerance 入力雑音耐量	
Object	+5.0V 15A	

1. Results

Pulse Width [nS]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

2. Conditions

Input Voltage : 100 V
 Pulse Voltage : 2000 V
 Pulse Cycle : 10 mS
 Pulse Input Duration : 1 min. or more
 Load : 100 %

COSEL

Model	LCA75S-5	Temperature	25°C
Item	Conducted Emission 雑音端子電圧	Testing Circuitry	Figure D
Object			

1. Graph

Remarks


Input Volt. 100 V (VCCI Class B)

120 V (FCC Class B)


Load 100 %

規格 1: [VCCI] Class B(QP)

規格 2: [VCCI] Class B(平均値)

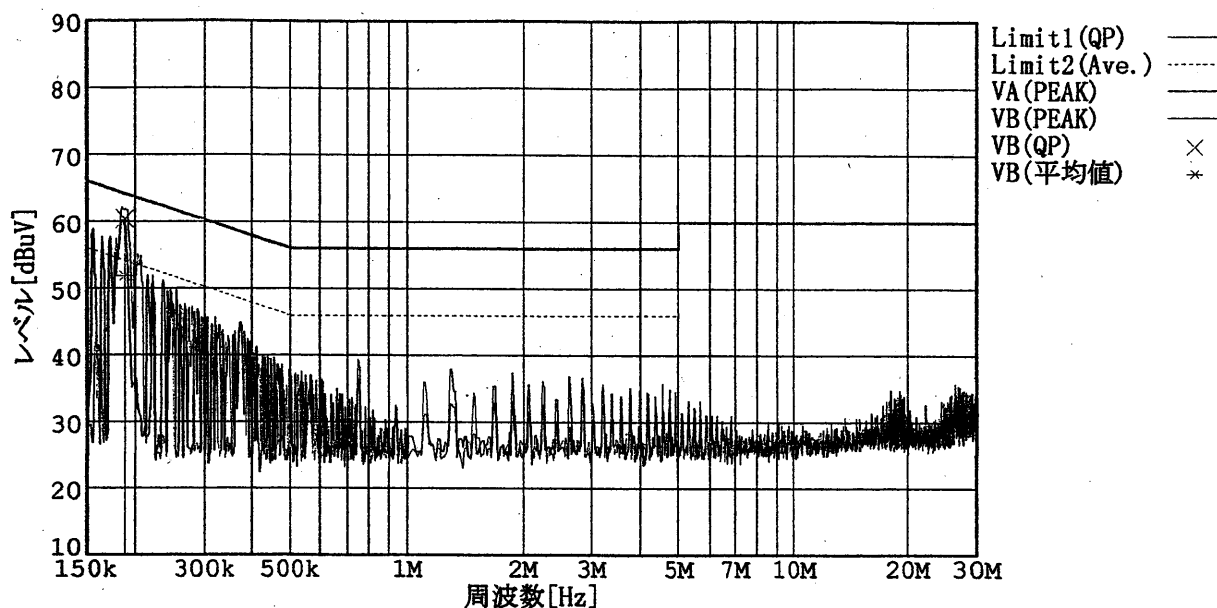

規格 1: [FCC Part15] Class B

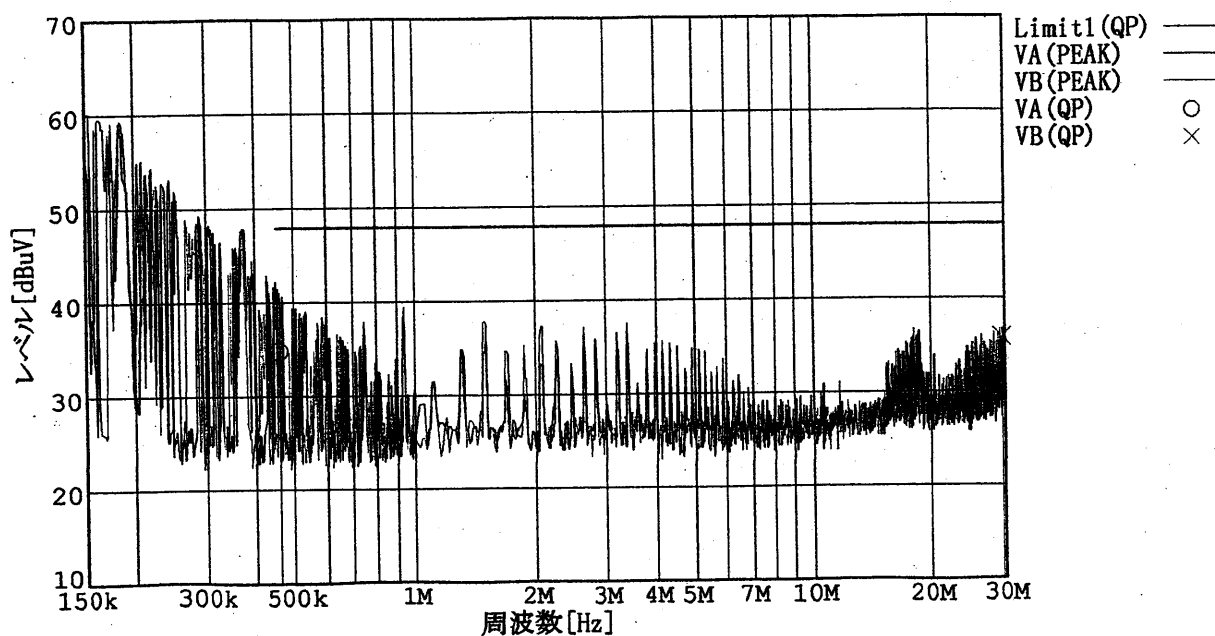

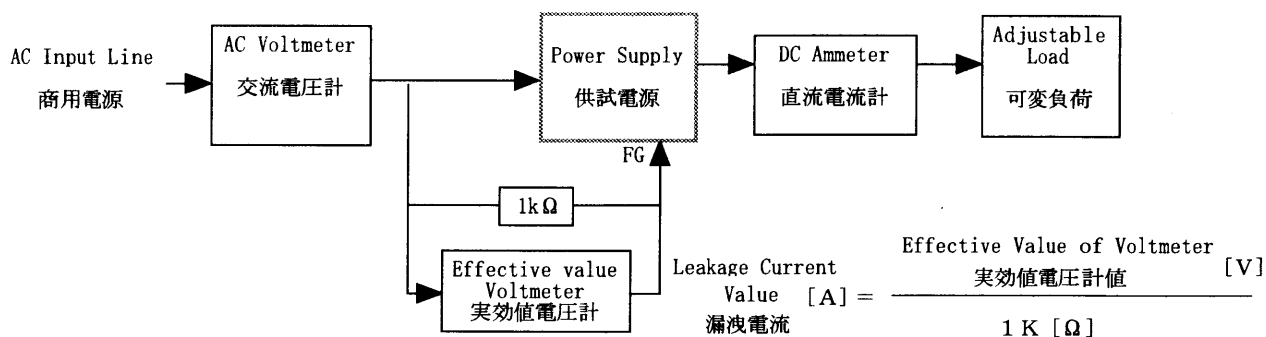
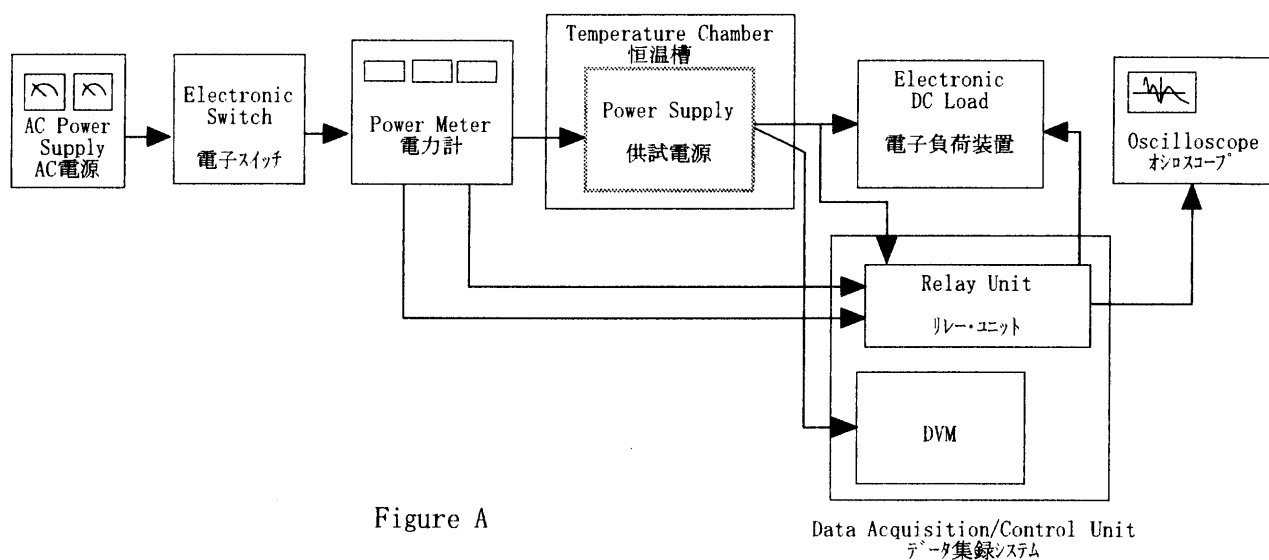


Figure B (DENTORI)

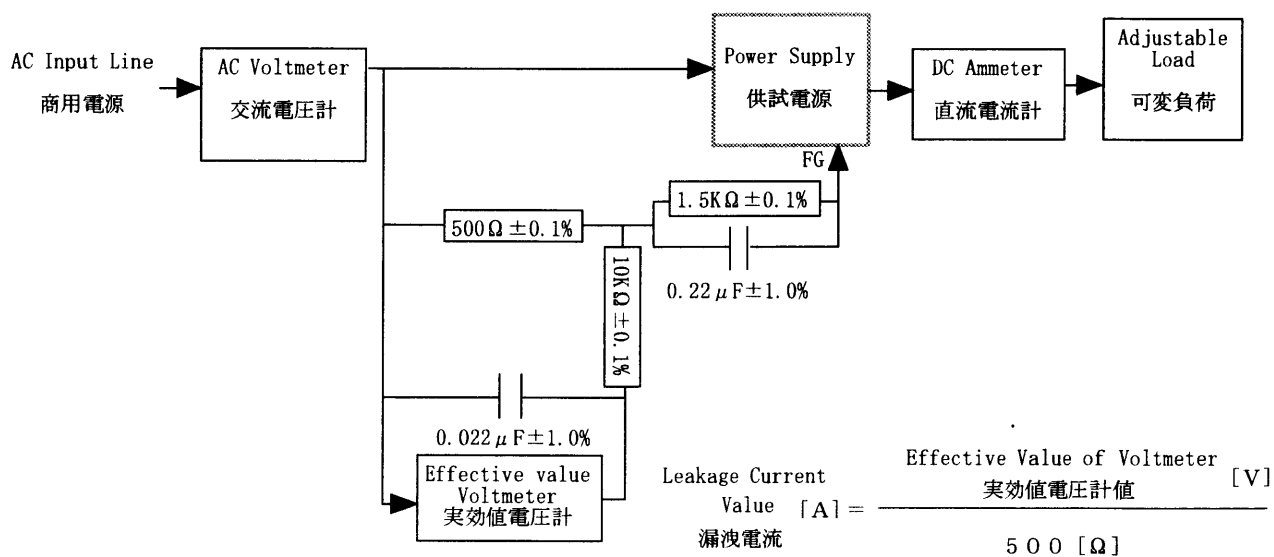


Figure B (IEC 60950)

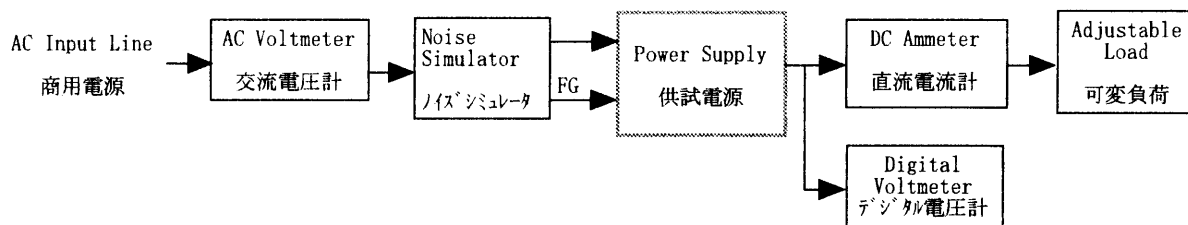


Figure C

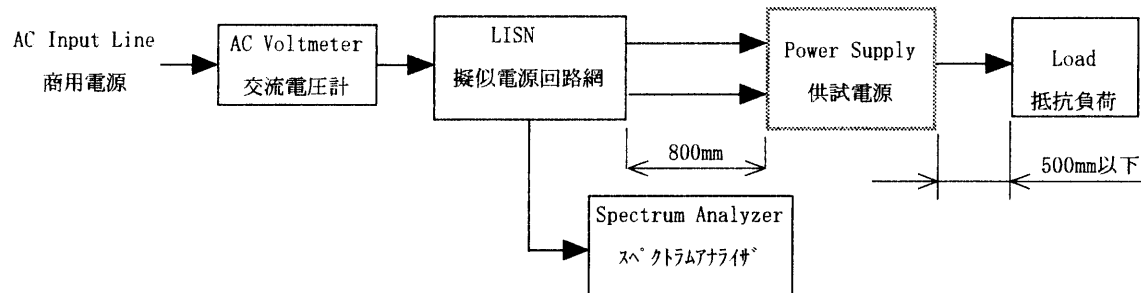


Figure D

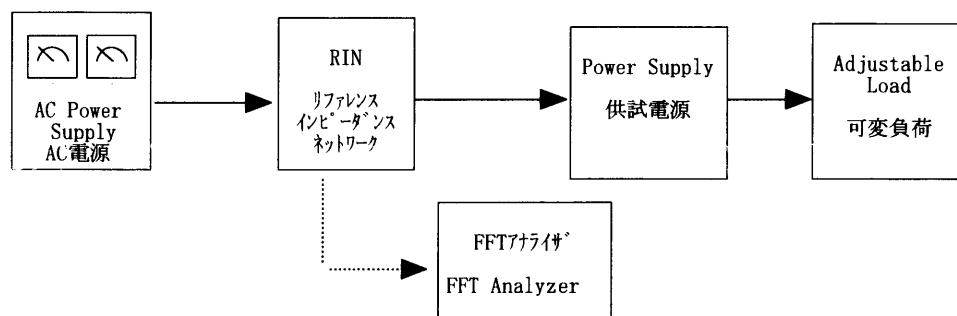


Figure E