



TEST DATA OF LDA100W-12 (100V INPUT)

Regulated DC Power Supply

Date : Aug. 13. 1999

Approved by : H. Yamaguchi
Design Manager

Prepared by : J. Asano
Design Engineer

コーセル株式会社

COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Input Current (by Load Current)	2
入力電流 (負荷特性)	
3. Input Power (by Load Current)	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage)	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current)	5
効率 (負荷特性)	
6. Hold-Up Time	6
出力保持時間	
7. Instantaneous Interruption Compensation	7
瞬時停電保障	
8. Load Regulation	8
静的負荷変動	
9. Ripple Voltage (by Load Current)	9
リップル電圧 (負荷特性)	
10. Ripple-Noise	10
リップルノイズ	
11. Overcurrent Protection	11
過電流保護	
12. Overvoltage Protection	12
過電圧保護	
13. Inrush Current	13
突入電流	
14. Dynamic Load Responce	14
動的負荷変動	
15. Rise and Fall Time	15
立上り、立下がり時間	
16. Ambient Temperature Drift	16
周囲温度変動	
17. Minimum Input Voltage for Regulated Output Voltage .	17
最低レギュレーション電圧	
18. Ripple Voltage (by Ambient Temperature)	18
リップル電圧 (周囲温度特性)	
19. Time Lapse Drift	19
経時ドリフト	
20. Output Voltage Accuracy	20
定電圧精度	
21. Condensation	21
結露特性	
22. Leakage Current	22
漏洩電流	
23. Line Noise Tolerance	23
入力雑音耐量	
24. Conducted Emission	24
雑音端子電圧	
25. Figure of Testing Circuitry	25
測定回路図	

(Final Page 26)

COSEL

Model	LDA100W-12	Temperature	25°C
Item	Input Current (by Load Current) 入力電流 (負荷特性)	Testing Circuitry	Figure A
Output	—		

1. Graph

△

Input Volt. 85V

□

Input Volt. 100V

○

Input Volt. 132V

Input Current [A]

5

4

3

2

1

0

0

2

4

6

8

10

Load Current [A]

Note: Slanted line shows the range of the rated load current

(注) 斜線は定格負荷電流範囲を示す。

2. Values

Load Current [A]	Input Current [A]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
0.00	0.132	0.134	0.150
1.50	0.587	0.542	0.480
3.00	0.999	0.901	0.767
4.50	1.413	1.263	1.058
6.00	1.818	1.617	1.345
7.50	2.225	1.969	1.629
8.50	2.498	2.201	1.815
9.35	2.736	2.401	1.974
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

COSEL

Model		LDA100W-12		Temperature		25℃																																																					
Item		Input Power (by Load Current) 入力電力 (負荷特性)		Testing Circuitry		Figure A																																																					
Output		_____																																																									
1. Graph				2. Values																																																							
<div><div><div>△</div><div>Input Volt. 85V</div></div><div><div>□</div><div>Input Volt. 100V</div></div><div><div>○</div><div>Input Volt. 132V</div></div></div> <div><div><div>Input Power [W]</div><div>200</div><div>150</div><div>100</div><div>50</div><div>0</div></div><div><div>Load Current [A]</div><div>0</div><div>2</div><div>4</div><div>6</div><div>8</div><div>10</div></div></div> <div><div>Note: Slanted line shows the range of the rated load current</div><div>(注)斜線は定格負荷電流範囲を示す。</div></div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Power [W]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>0.00</td><td>3.02</td><td>3.73</td><td>5.49</td></tr><tr><td>1.50</td><td>25.60</td><td>26.46</td><td>28.92</td></tr><tr><td>3.00</td><td>46.92</td><td>47.59</td><td>49.80</td></tr><tr><td>4.50</td><td>68.60</td><td>68.97</td><td>70.80</td></tr><tr><td>6.00</td><td>90.50</td><td>90.60</td><td>92.10</td></tr><tr><td>7.50</td><td>113.10</td><td>112.70</td><td>113.60</td></tr><tr><td>8.50</td><td>128.40</td><td>127.60</td><td>128.10</td></tr><tr><td>9.35</td><td>141.70</td><td>140.50</td><td>140.60</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>	Load Current [A]	Input Power [W]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	3.02	3.73	5.49	1.50	25.60	26.46	28.92	3.00	46.92	47.59	49.80	4.50	68.60	68.97	70.80	6.00	90.50	90.60	92.10	7.50	113.10	112.70	113.60	8.50	128.40	127.60	128.10	9.35	141.70	140.50	140.60	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Power [W]																																																										
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																								
0.00	3.02	3.73	5.49																																																								
1.50	25.60	26.46	28.92																																																								
3.00	46.92	47.59	49.80																																																								
4.50	68.60	68.97	70.80																																																								
6.00	90.50	90.60	92.10																																																								
7.50	113.10	112.70	113.60																																																								
8.50	128.40	127.60	128.10																																																								
9.35	141.70	140.50	140.60																																																								
—	—	—	—																																																								
—	—	—	—																																																								
—	—	—	—																																																								
—	—	—	—																																																								

COSEL

Model		LDA100W-12		Temperature		25℃																															
Item		Efficiency 効率		Testing Circuitry		Figure A																															
Object																																					
1. Graph				2. Values																																	
<div><div>□ Load 50%</div><div>△ Load 100%</div></div> <table><thead><tr><th>Input Voltage [V]</th><th>Load 50% Efficiency [%]</th><th>Load 100% Efficiency [%]</th></tr></thead><tbody><tr><td>75</td><td>80.6</td><td>80.1</td></tr><tr><td>80</td><td>80.4</td><td>80.9</td></tr><tr><td>85</td><td>80.4</td><td>81.3</td></tr><tr><td>90</td><td>80.2</td><td>81.5</td></tr><tr><td>100</td><td>79.7</td><td>81.8</td></tr><tr><td>110</td><td>79.2</td><td>81.9</td></tr><tr><td>120</td><td>78.6</td><td>81.7</td></tr><tr><td>132</td><td>77.5</td><td>81.4</td></tr><tr><td>140</td><td>76.9</td><td>81.2</td></tr></tbody></table>				Input Voltage [V]	Load 50% Efficiency [%]	Load 100% Efficiency [%]	75	80.6	80.1	80	80.4	80.9	85	80.4	81.3	90	80.2	81.5	100	79.7	81.8	110	79.2	81.9	120	78.6	81.7	132	77.5	81.4	140	76.9	81.2				
Input Voltage [V]	Load 50% Efficiency [%]	Load 100% Efficiency [%]																																			
75	80.6	80.1																																			
80	80.4	80.9																																			
85	80.4	81.3																																			
90	80.2	81.5																																			
100	79.7	81.8																																			
110	79.2	81.9																																			
120	78.6	81.7																																			
132	77.5	81.4																																			
140	76.9	81.2																																			
<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>																																					

COSEL

Model		LDA100W-12	Temperature		25℃																																																										
Item		Efficiency (by Load Current) 効率（負荷電流特性）	Testing Circuitry		Figure A																																																										
Output		—																																																													
1. Graph			2. Values																																																												
<div><div>—△—</div><div>Input Volt. 85V</div><div>—□—</div><div>Input Volt. 100V</div><div>—○—</div><div>Input Volt. 132V</div></div> <div><div>Efficiency [%]</div><div>90</div><div>80</div><div>70</div><div>60</div><div>50</div><div>40</div><div>0</div><div>0</div><div>2</div><div>4</div><div>6</div><div>8</div><div>10</div><div>Load Current [A]</div></div> <div><div>Note: Slanted line shows the range of the rated load current</div><div>(注)斜線は定格負荷電流範囲を示す。</div></div> <tr><td colspan="3"></td><td colspan="3"><table><tr><td rowspan="2">Load Current [A]</td><td colspan="3">Efficiency [%]</td></tr><tr><td>Input Volt. 85[V]</td><td>Input Volt. 100[V]</td><td>Input Volt. 132[V]</td></tr><tr><td>1.50</td><td>71.9</td><td>69.5</td><td>63.6</td></tr><tr><td>3.00</td><td>78.3</td><td>77.3</td><td>73.9</td></tr><tr><td>4.50</td><td>80.5</td><td>80.1</td><td>78.0</td></tr><tr><td>6.00</td><td>81.3</td><td>81.2</td><td>79.9</td></tr><tr><td>7.50</td><td>81.3</td><td>81.6</td><td>81.0</td></tr><tr><td>8.50</td><td>81.1</td><td>81.7</td><td>81.3</td></tr><tr><td>9.35</td><td>80.9</td><td>81.6</td><td>81.6</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table></td></tr>						<table><tr><td rowspan="2">Load Current [A]</td><td colspan="3">Efficiency [%]</td></tr><tr><td>Input Volt. 85[V]</td><td>Input Volt. 100[V]</td><td>Input Volt. 132[V]</td></tr><tr><td>1.50</td><td>71.9</td><td>69.5</td><td>63.6</td></tr><tr><td>3.00</td><td>78.3</td><td>77.3</td><td>73.9</td></tr><tr><td>4.50</td><td>80.5</td><td>80.1</td><td>78.0</td></tr><tr><td>6.00</td><td>81.3</td><td>81.2</td><td>79.9</td></tr><tr><td>7.50</td><td>81.3</td><td>81.6</td><td>81.0</td></tr><tr><td>8.50</td><td>81.1</td><td>81.7</td><td>81.3</td></tr><tr><td>9.35</td><td>80.9</td><td>81.6</td><td>81.6</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>			Load Current [A]	Efficiency [%]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	1.50	71.9	69.5	63.6	3.00	78.3	77.3	73.9	4.50	80.5	80.1	78.0	6.00	81.3	81.2	79.9	7.50	81.3	81.6	81.0	8.50	81.1	81.7	81.3	9.35	80.9	81.6	81.6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
			<table><tr><td rowspan="2">Load Current [A]</td><td colspan="3">Efficiency [%]</td></tr><tr><td>Input Volt. 85[V]</td><td>Input Volt. 100[V]</td><td>Input Volt. 132[V]</td></tr><tr><td>1.50</td><td>71.9</td><td>69.5</td><td>63.6</td></tr><tr><td>3.00</td><td>78.3</td><td>77.3</td><td>73.9</td></tr><tr><td>4.50</td><td>80.5</td><td>80.1</td><td>78.0</td></tr><tr><td>6.00</td><td>81.3</td><td>81.2</td><td>79.9</td></tr><tr><td>7.50</td><td>81.3</td><td>81.6</td><td>81.0</td></tr><tr><td>8.50</td><td>81.1</td><td>81.7</td><td>81.3</td></tr><tr><td>9.35</td><td>80.9</td><td>81.6</td><td>81.6</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>			Load Current [A]	Efficiency [%]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	1.50	71.9	69.5	63.6	3.00	78.3	77.3	73.9	4.50	80.5	80.1	78.0	6.00	81.3	81.2	79.9	7.50	81.3	81.6	81.0	8.50	81.1	81.7	81.3	9.35	80.9	81.6	81.6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
Load Current [A]	Efficiency [%]																																																														
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																												
1.50	71.9	69.5	63.6																																																												
3.00	78.3	77.3	73.9																																																												
4.50	80.5	80.1	78.0																																																												
6.00	81.3	81.2	79.9																																																												
7.50	81.3	81.6	81.0																																																												
8.50	81.1	81.7	81.3																																																												
9.35	80.9	81.6	81.6																																																												
—	—	—	—																																																												
—	—	—	—																																																												
—	—	—	—																																																												
—	—	—	—																																																												
—	—	—	—																																																												

COSEL

Model		LDA100W-12		Temperature		25℃																																	
Item		Hold-Up Time 出力保持時間		Testing Circuitry		Figure A																																	
Object		+ 12.0V8.5A																																					
1. Graph				2. Values																																			
<div><div>□ Load 50%</div><div>△ Load 100%</div></div> <div><div>Hold-Up Time [mS]</div><div><div>Hold-Up Time</div><div>Input Voltage [V]</div></div></div> <div><div>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</div><div>Note: Slanted line shows the range of the rated input voltage.</div><div>出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。</div><div>(注)斜線は定格入力電圧範囲を示す。</div></div>				<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Hold-Up Time [mS]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>75</td><td>24</td><td>8</td></tr><tr><td>80</td><td>30</td><td>11</td></tr><tr><td>85</td><td>36</td><td>14</td></tr><tr><td>90</td><td>43</td><td>18</td></tr><tr><td>100</td><td>58</td><td>26</td></tr><tr><td>110</td><td>74</td><td>35</td></tr><tr><td>120</td><td>92</td><td>44</td></tr><tr><td>132</td><td>116</td><td>56</td></tr><tr><td>140</td><td>133</td><td>65</td></tr></table>				Input Voltage [V]	Hold-Up Time [mS]		Load 50%	Load 100%	75	24	8	80	30	11	85	36	14	90	43	18	100	58	26	110	74	35	120	92	44	132	116	56	140	133	65
Input Voltage [V]	Hold-Up Time [mS]																																						
	Load 50%	Load 100%																																					
75	24	8																																					
80	30	11																																					
85	36	14																																					
90	43	18																																					
100	58	26																																					
110	74	35																																					
120	92	44																																					
132	116	56																																					
140	133	65																																					

COSEL


Model LDA100W-12

Item Instantaneous Interruption Compensation
瞬時停電保障

Object +12.0V8.5A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

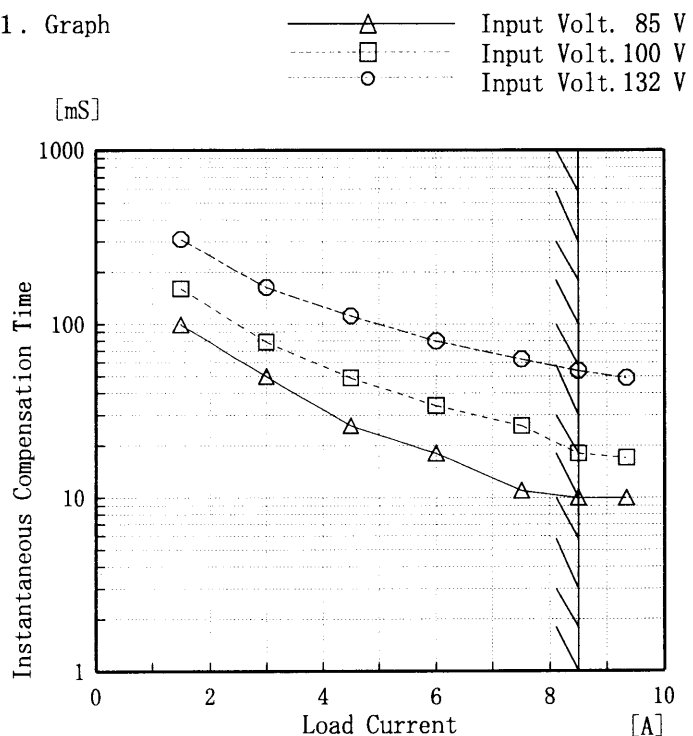

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated load current.

瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。

(注) 斜線は定格負荷電流範囲を示す。

2. Values


Load Current [A]	Time [mS]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
0.00	—	—	—
1.50	99	161	310
3.00	50	79	164
4.50	26	49	112
6.00	18	34	80
7.50	11	26	63
8.50	10	18	54
9.35	10	17	49
—	—	—	—
—	—	—	—
—	—	—	—

COSEL

Model		LDA100W-12		Temperature		25℃																																																
Item		Load Regulation 静的負荷変動		Testing Circuitry		Figure A																																																
Object		+12.0V8.5A																																																				
1. Graph				2. Values																																																		
<div><div><div>△</div><div>□</div><div>○</div></div><div><div>Input Volt. 85 V</div><div>Input Volt. 100 V</div><div>Input Volt. 132 V</div></div></div> <div><div><div>Output Voltage [V]</div><div><div>12.34</div><div>12.30</div><div>12.26</div><div>12.22</div><div>12.18</div><div>12.14</div><div>12.10</div><div>0</div></div><div><div>0</div><div>2</div><div>4</div><div>6</div><div>8</div><div>10</div></div><div>Load Current [A]</div></div></div> <div><div>Note: Slanted line shows the range of the rated load current.</div><div>(注)斜線は定格負荷電流範囲を示す。</div></div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>0.00</td><td>12.197</td><td>12.197</td><td>12.197</td></tr><tr><td>1.50</td><td>12.197</td><td>12.197</td><td>12.197</td></tr><tr><td>3.00</td><td>12.197</td><td>12.197</td><td>12.197</td></tr><tr><td>4.50</td><td>12.197</td><td>12.197</td><td>12.197</td></tr><tr><td>6.00</td><td>12.197</td><td>12.197</td><td>12.197</td></tr><tr><td>7.50</td><td>12.197</td><td>12.197</td><td>12.197</td></tr><tr><td>8.50</td><td>12.197</td><td>12.197</td><td>12.197</td></tr><tr><td>9.35</td><td>12.197</td><td>12.197</td><td>12.197</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Output Voltage [V]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	12.197	12.197	12.197	1.50	12.197	12.197	12.197	3.00	12.197	12.197	12.197	4.50	12.197	12.197	12.197	6.00	12.197	12.197	12.197	7.50	12.197	12.197	12.197	8.50	12.197	12.197	12.197	9.35	12.197	12.197	12.197	—	—	—	—	—	—	—	—
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																			
0.00	12.197	12.197	12.197																																																			
1.50	12.197	12.197	12.197																																																			
3.00	12.197	12.197	12.197																																																			
4.50	12.197	12.197	12.197																																																			
6.00	12.197	12.197	12.197																																																			
7.50	12.197	12.197	12.197																																																			
8.50	12.197	12.197	12.197																																																			
9.35	12.197	12.197	12.197																																																			
—	—	—	—																																																			
—	—	—	—																																																			

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

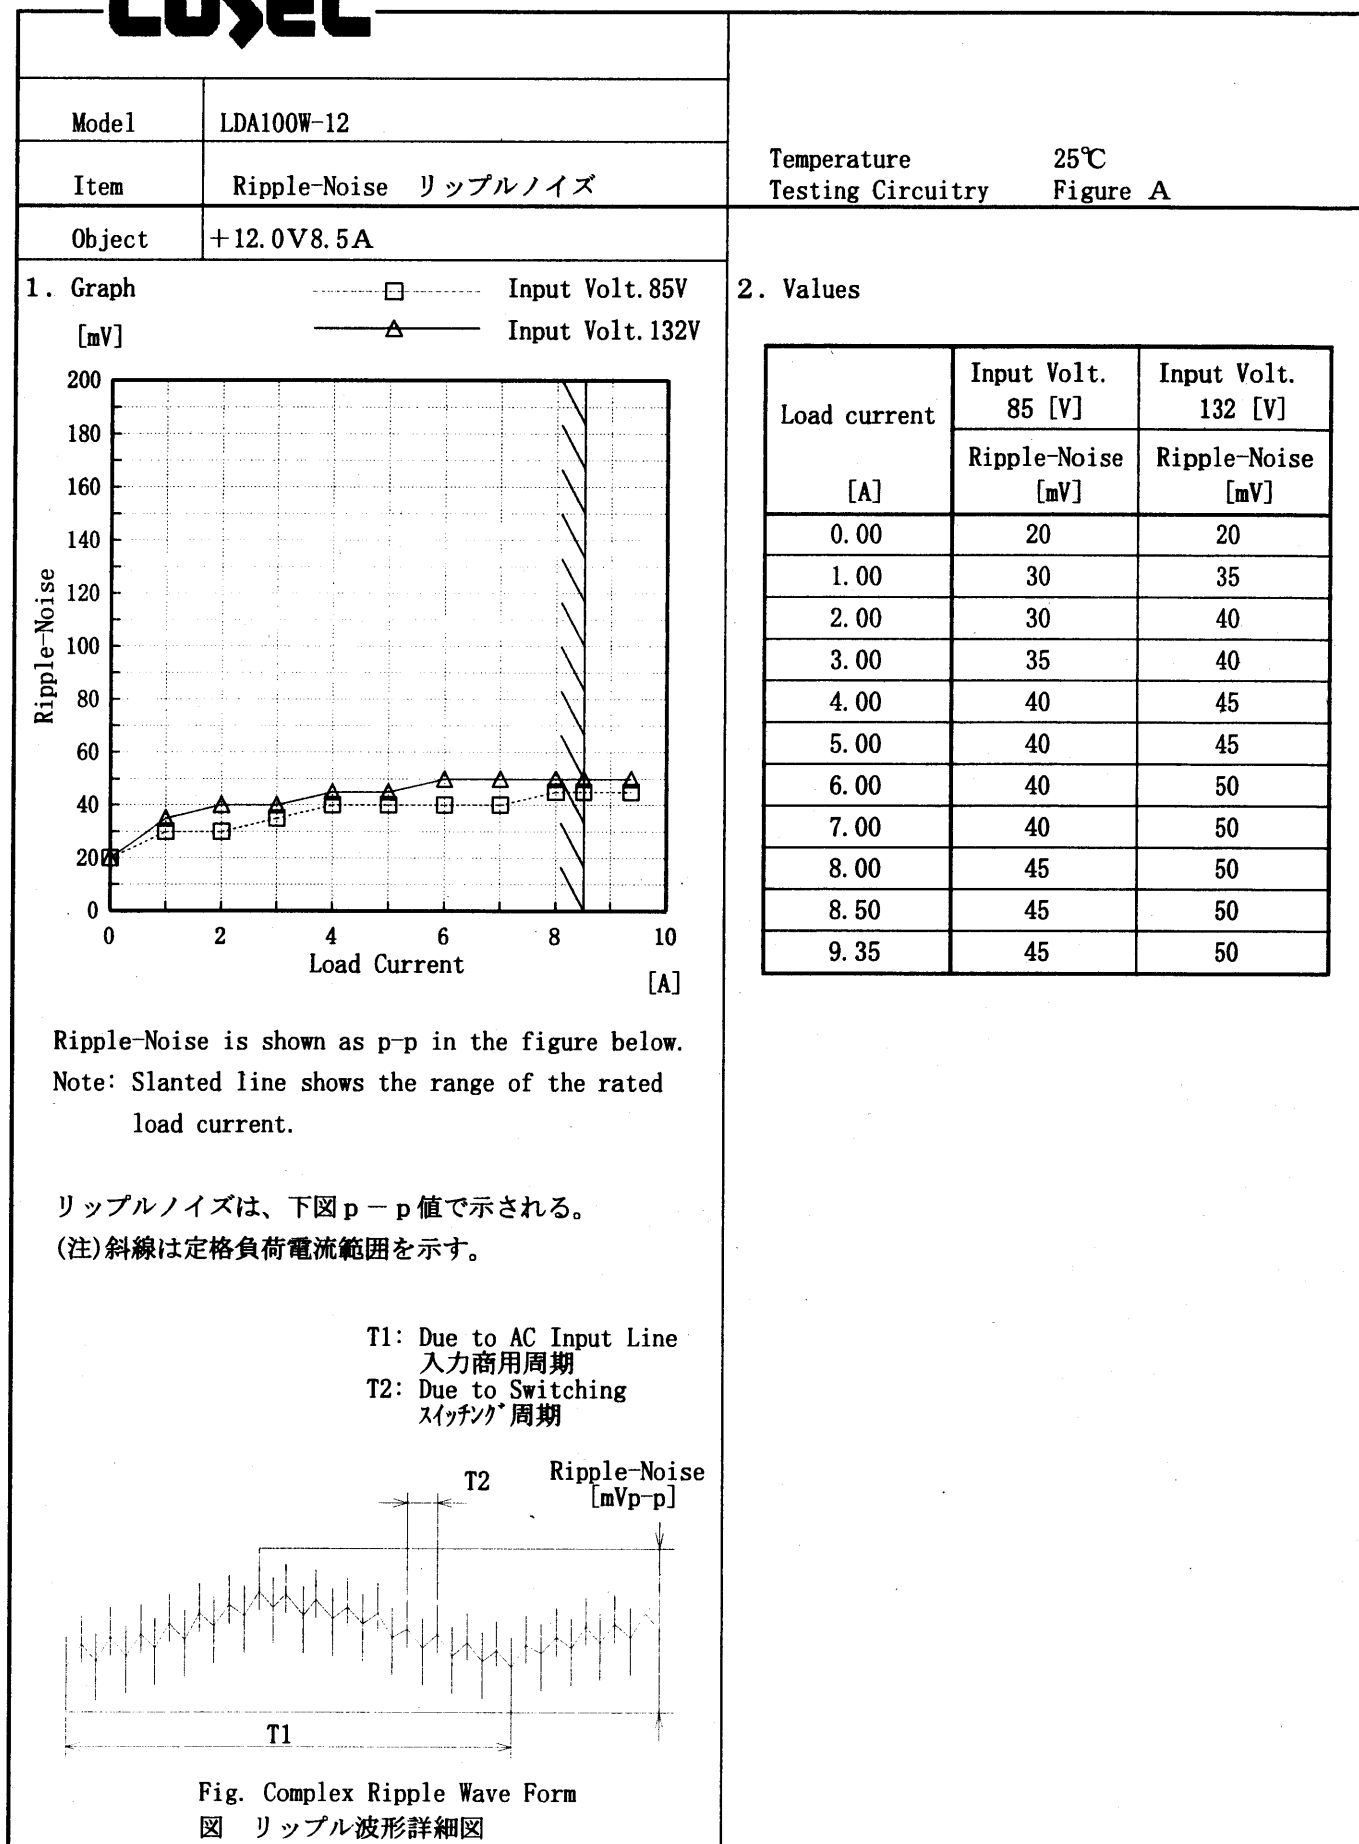COSEL

COSEL

Model	LDA100W-12	Temperature 25℃ Testing Circuitry Figure A																																																									
Item	Overcurrent Protection 過電流保護																																																										
Object	+ 12.0V8.5A																																																										
1. Graph		2. Values																																																									
<div><div><div>~~~~~</div><div>-----</div><div>=====</div></div><div><div>Input Volt. 85 V</div><div>Input Volt. 100 V</div><div>Input Volt. 132 V</div></div></div> <div><div>[V]</div><div>Output Voltage</div><div>20.0</div><div>15.0</div><div>10.0</div><div>5.0</div><div>0.0</div><div>0</div><div>2</div><div>4</div><div>6</div><div>8</div><div>10</div><div>12</div><div>14</div><div>[A]</div><div>Load Current</div></div>		<table><tr><th rowspan="2">Output Voltage [V]</th><th colspan="3">Load Current [A]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>12.00</td><td>11.11</td><td>11.04</td><td>11.13</td></tr><tr><td>11.40</td><td>11.13</td><td>11.09</td><td>11.20</td></tr><tr><td>10.80</td><td>11.17</td><td>11.14</td><td>11.26</td></tr><tr><td>9.60</td><td>11.26</td><td>11.25</td><td>11.40</td></tr><tr><td>8.40</td><td>11.38</td><td>11.39</td><td>11.50</td></tr><tr><td>7.20</td><td>11.50</td><td>11.54</td><td>11.59</td></tr><tr><td>6.00</td><td>11.63</td><td>11.64</td><td>11.78</td></tr><tr><td>4.80</td><td>11.68</td><td>11.76</td><td>11.99</td></tr><tr><td>3.60</td><td>11.81</td><td>11.82</td><td>12.13</td></tr><tr><td>2.40</td><td>11.84</td><td>11.98</td><td>12.20</td></tr><tr><td>1.20</td><td>11.86</td><td>11.88</td><td>11.98</td></tr><tr><td>0.00</td><td>11.30</td><td>11.21</td><td>11.08</td></tr></table>			Output Voltage [V]	Load Current [A]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	12.00	11.11	11.04	11.13	11.40	11.13	11.09	11.20	10.80	11.17	11.14	11.26	9.60	11.26	11.25	11.40	8.40	11.38	11.39	11.50	7.20	11.50	11.54	11.59	6.00	11.63	11.64	11.78	4.80	11.68	11.76	11.99	3.60	11.81	11.82	12.13	2.40	11.84	11.98	12.20	1.20	11.86	11.88	11.98	0.00	11.30	11.21	11.08
Output Voltage [V]	Load Current [A]																																																										
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																								
12.00	11.11	11.04	11.13																																																								
11.40	11.13	11.09	11.20																																																								
10.80	11.17	11.14	11.26																																																								
9.60	11.26	11.25	11.40																																																								
8.40	11.38	11.39	11.50																																																								
7.20	11.50	11.54	11.59																																																								
6.00	11.63	11.64	11.78																																																								
4.80	11.68	11.76	11.99																																																								
3.60	11.81	11.82	12.13																																																								
2.40	11.84	11.98	12.20																																																								
1.20	11.86	11.88	11.98																																																								
0.00	11.30	11.21	11.08																																																								

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。


Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

COSEL

Model	LDA100W-12
Item	Overvoltage Protection 過電圧保護
Object	+12.0V8.5A

Testing Circuitry Figure A

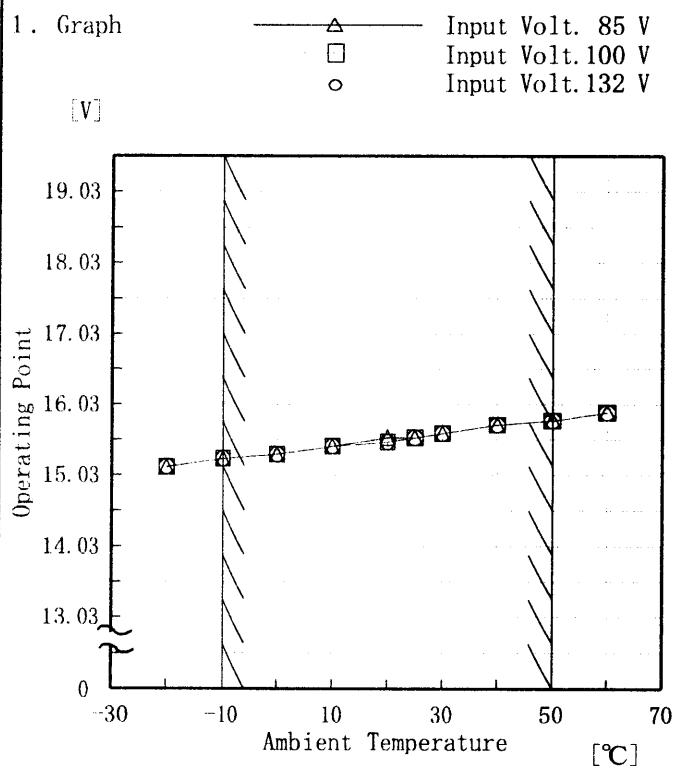

Note: Slanted line shows the range of the rated ambient temperature.


(注)斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temperature [°C]	Operating Point [V]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
-20	15.14	15.14	15.15
-10	15.26	15.26	15.26
0	15.32	15.32	15.32
10	15.44	15.44	15.44
20	15.56	15.50	15.50
25	15.56	15.56	15.56
30	15.62	15.62	15.62
40	15.74	15.74	15.74
50	15.80	15.80	15.80
60	15.91	15.91	15.91
—	—	—	—


COSEL

Model	LDA100W-12	Temperature 25°C Testing Circuitry Figure A
Item	Inrush Current 突入電流	
Object		

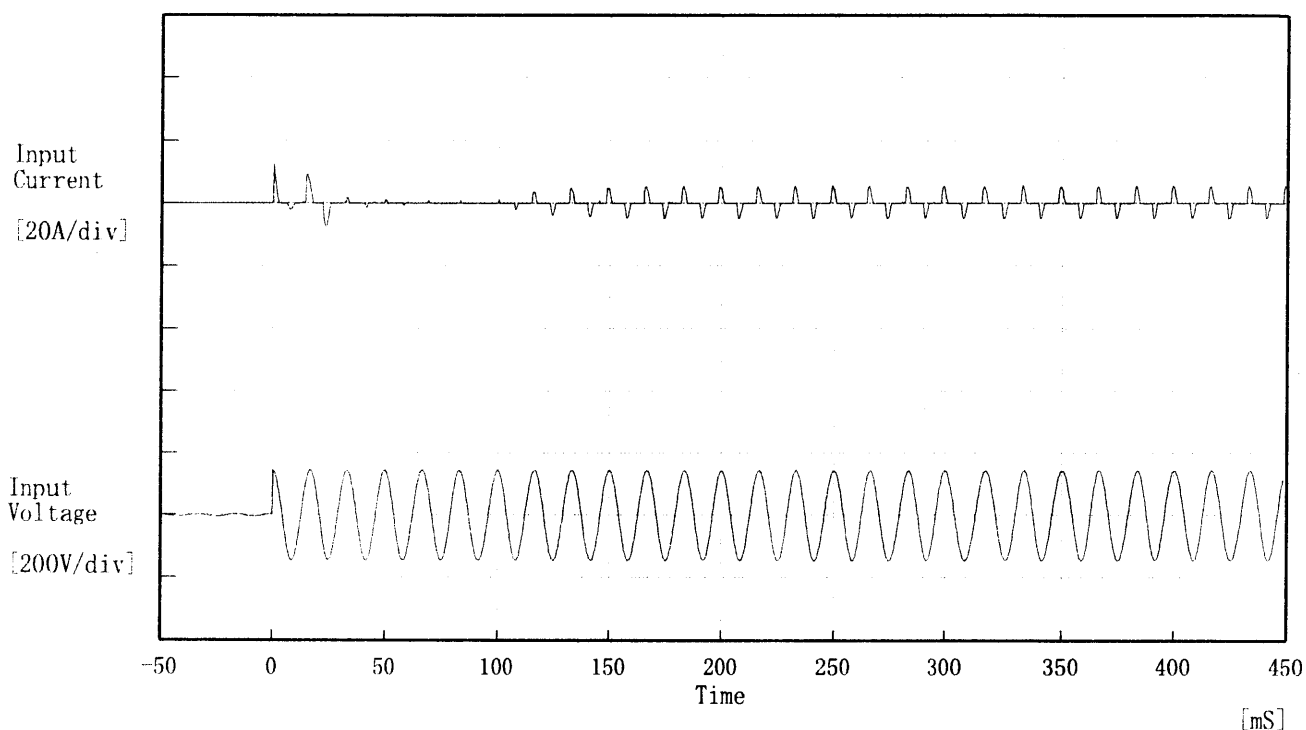

Input Voltage 100 V
Frequency 60 Hz
Load 100 %
Inrush Current

- ① 12.38 [A]
- ② 5.58 [A]

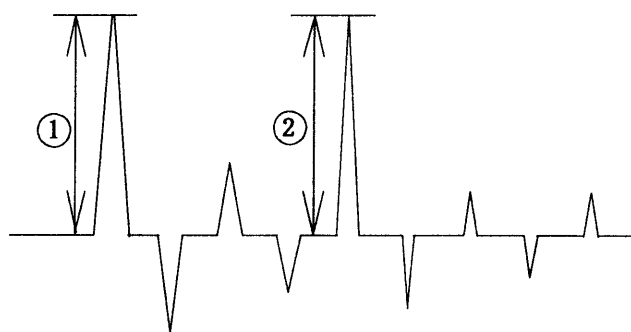

COSEL

Model	LDA100W-12	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Response 動的負荷変動	
Object	+12.0V8.5A	



Input Volt. 100 V

Cycle 1000 mS



Load Current

Load 0% \longleftrightarrow

Load 100 %

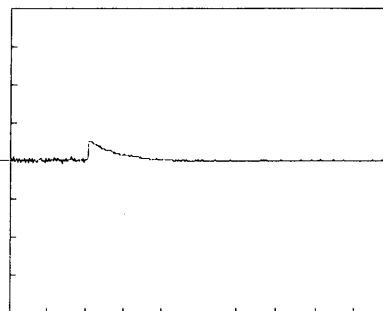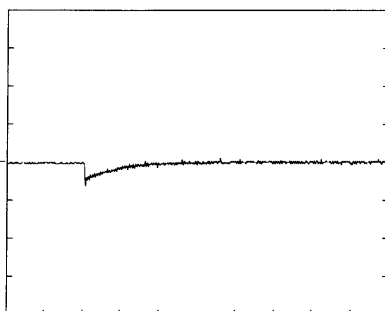Load 0% \longleftrightarrow

Load 50 %

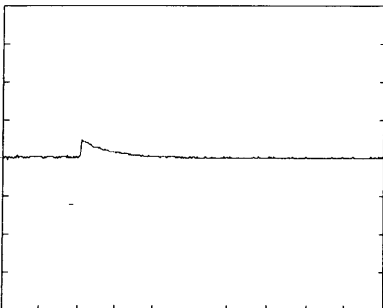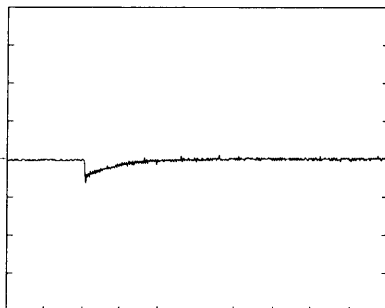

100 mV/div


10 mS/div

COSEL

Model	LDA100W-12	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+12.0V8.5A		

1. Graph


Input Volt. 85 V

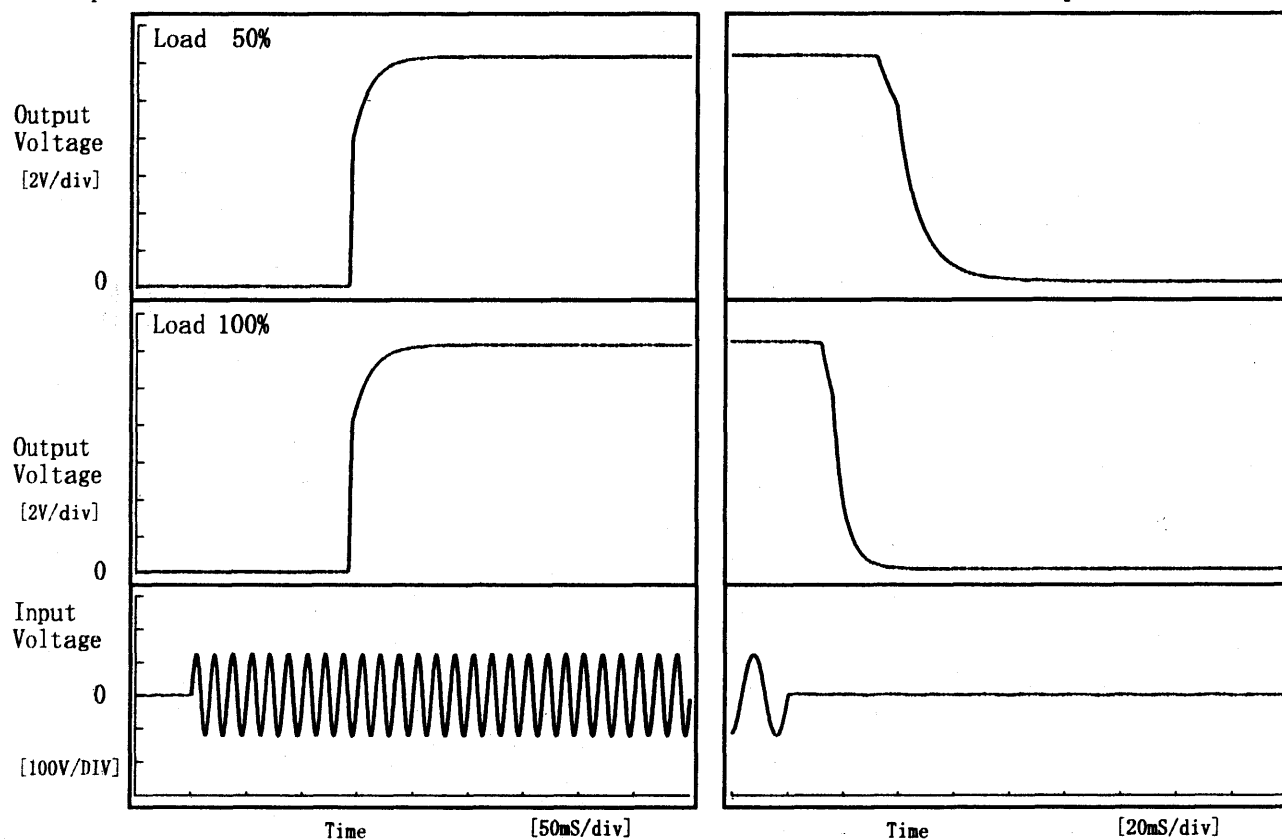

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	142.3	19.5	161.8	36.0	23.2
100 %	142.3	19.8	162.0	14.3	11.9

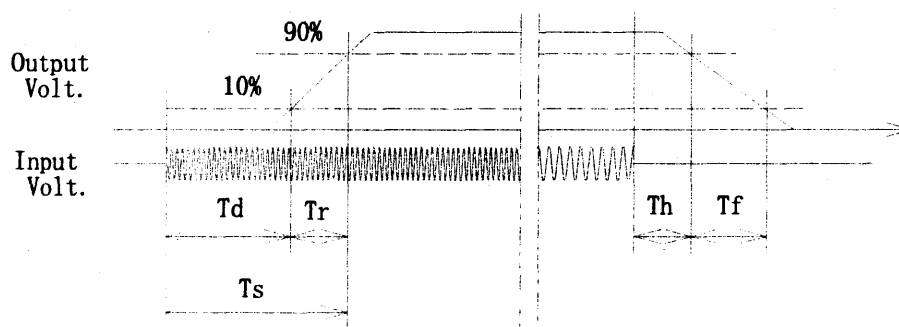

COSEL


Model LDA100W-12

Item Ambient Temperature Drift
周囲温度変動

Object +12.0V8.5A

Testing Circuitry Figure A

1. Graph

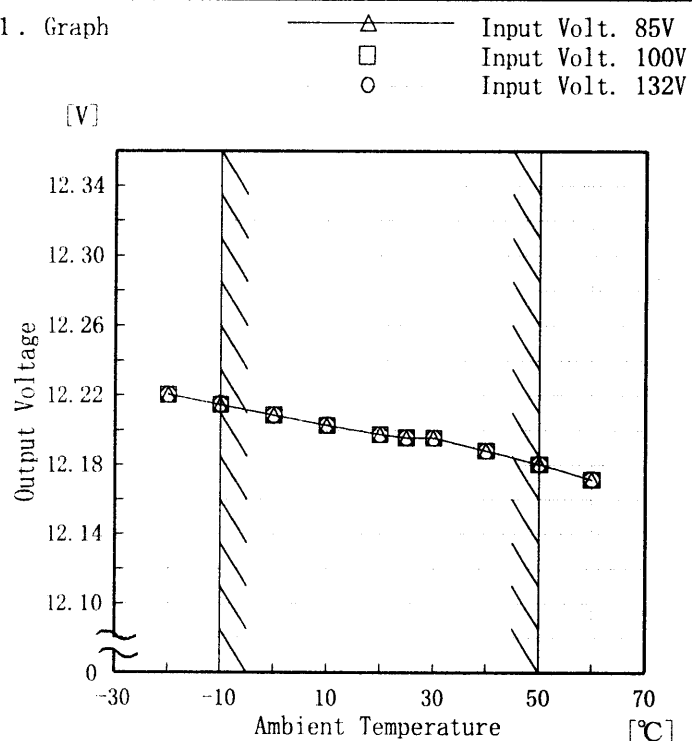

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values

Temperature [°C]	Output Voltage [V]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
-20	12.220	12.220	12.220
-10	12.215	12.215	12.215
0	12.209	12.209	12.209
10	12.203	12.203	12.203
20	12.197	12.198	12.198
25	12.196	12.196	12.196
30	12.196	12.196	12.196
40	12.188	12.188	12.188
50	12.180	12.180	12.180
60	12.171	12.172	12.172
—	—	—	—


COSEL

Model LDA100W-12

Item Minimum Input Voltage for Regulated Output Voltage
最低レギュレーション電圧

Object +12.0V 8.5A

Testing Circuitry Figure A

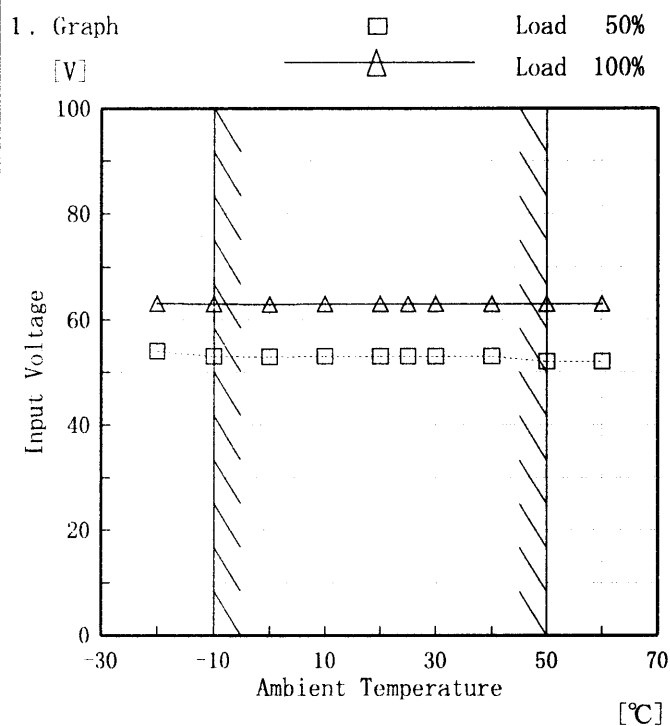

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。


2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-20	54	63
-10	53	63
0	53	63
10	53	63
20	53	63
25	53	63
30	53	63
40	53	63
50	52	63
60	52	63
—	—	—

COSEL

Model LDA100W-12		Testing Circuitry Figure A																																				
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)																																					
Object	+12.0V 8.5A																																					
<p>1. Graph</p> <p>□ Load 50% —△— Load 100%</p> <p>[mV]</p> <p>Ripple Voltage</p> <p>Ambient Temperature [°C]</p> <p>Input Volt. 100 V</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注) 斜線は定格周囲温度範囲を示す。</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th>Ambient Temp. [°C]</th><th>Load 50% Ripple Output Volt. [mV]</th><th>Load 100% Ripple Output Volt. [mV]</th></tr> </thead> <tbody> <tr><td>-20</td><td>40</td><td>45</td></tr> <tr><td>-10</td><td>30</td><td>40</td></tr> <tr><td>0</td><td>25</td><td>30</td></tr> <tr><td>10</td><td>25</td><td>30</td></tr> <tr><td>20</td><td>20</td><td>25</td></tr> <tr><td>25</td><td>20</td><td>25</td></tr> <tr><td>30</td><td>20</td><td>20</td></tr> <tr><td>40</td><td>20</td><td>20</td></tr> <tr><td>50</td><td>15</td><td>20</td></tr> <tr><td>60</td><td>15</td><td>20</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]	-20	40	45	-10	30	40	0	25	30	10	25	30	20	20	25	25	20	25	30	20	20	40	20	20	50	15	20	60	15	20	—	—	—
Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]																																				
-20	40	45																																				
-10	30	40																																				
0	25	30																																				
10	25	30																																				
20	20	25																																				
25	20	25																																				
30	20	20																																				
40	20	20																																				
50	15	20																																				
60	15	20																																				
—	—	—																																				

COSEL

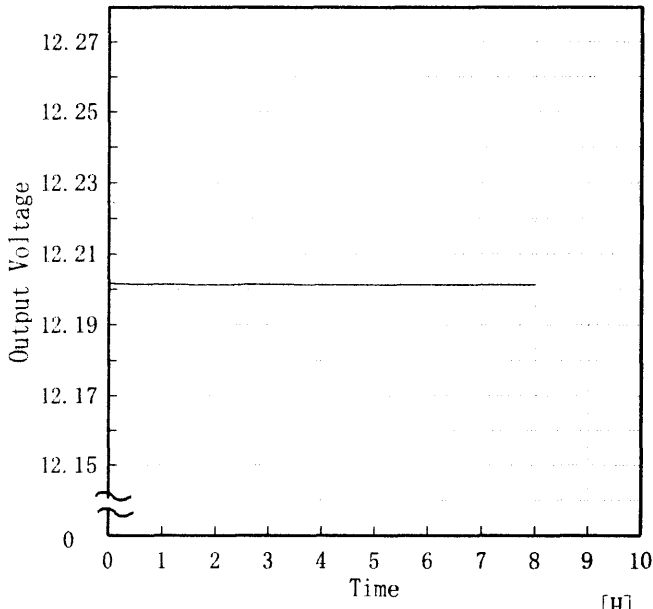COSEL																									
Model	LDA100W-12	Temperature 25℃ Testing Circuitry Figure A																							
Item	Time Lapse Drift 経時ドリフト																								
Object	+12.0V8.5A																								
1. Graph		2.Values																							
<div><div>[V]</div><div></div><div>Output Voltage</div><div>Time</div><div>[H]</div><div>Input Volt. 100V</div><div>Load 100%</div></div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>12.202</td></tr><tr><td>0.5</td><td>12.201</td></tr><tr><td>1.0</td><td>12.201</td></tr><tr><td>2.0</td><td>12.201</td></tr><tr><td>3.0</td><td>12.201</td></tr><tr><td>4.0</td><td>12.201</td></tr><tr><td>5.0</td><td>12.201</td></tr><tr><td>6.0</td><td>12.201</td></tr><tr><td>7.0</td><td>12.201</td></tr><tr><td>8.0</td><td>12.201</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	12.202	0.5	12.201	1.0	12.201	2.0	12.201	3.0	12.201	4.0	12.201	5.0	12.201	6.0	12.201	7.0	12.201	8.0	12.201
Time since start [H]	Output Voltage [V]																								
0.0	12.202																								
0.5	12.201																								
1.0	12.201																								
2.0	12.201																								
3.0	12.201																								
4.0	12.201																								
5.0	12.201																								
6.0	12.201																								
7.0	12.201																								
8.0	12.201																								

COSEL

Model		LDA100W-12	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+12.0V8.5A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 85~132 V

Load Current : 0~8.5 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -10~50 °C

入力電圧 : 85~132 V

負荷電流 : 0~8.5 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-10	85	0.0	12.215	±18	±0.2
Minimum Voltage	50	132	8.5	12.180		

COSEL

Model	LDA100W-12	Temperature	25°C
Item	Leakage Current 漏洩電流	Testing Circuitry	Figure B
Object	_____		

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	0.20	0.27	0.37
(B) IEC60950	0.23	0.28	0.38

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	—	—	—

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力 of 両相について測定し、その大きい方を漏洩電流測定値とする。

COSEL

Model		LDA100W-12	Temperature 25°C Testing Circuitry Figure C
Item		Line Noise Tolerance 入力雑音耐量	
Object		+12.0V8.5A	

1. Results

Pulse Width [nS]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

2. Conditions

Input Voltage : 100 V
 Pulse Voltage : 2000 V
 Pulse Cycle : 10 mS
 Pulse Input Duration : 1 min. or more
 Load : 100 %

COSEL

Model	LDA100W-12	Temperature	25°C
Item	Conducted Emission 雑音端子電圧	Testing Circuitry	Figure D
Object			


1. Graph

Remarks


Input Volt. 100 V (VCCI Class B)
 120 V (FCC Class B)
 Load 100 %

規格 1: [VCCI] Class B(平均値)

規格 2: [VCCI] Class B(QP)

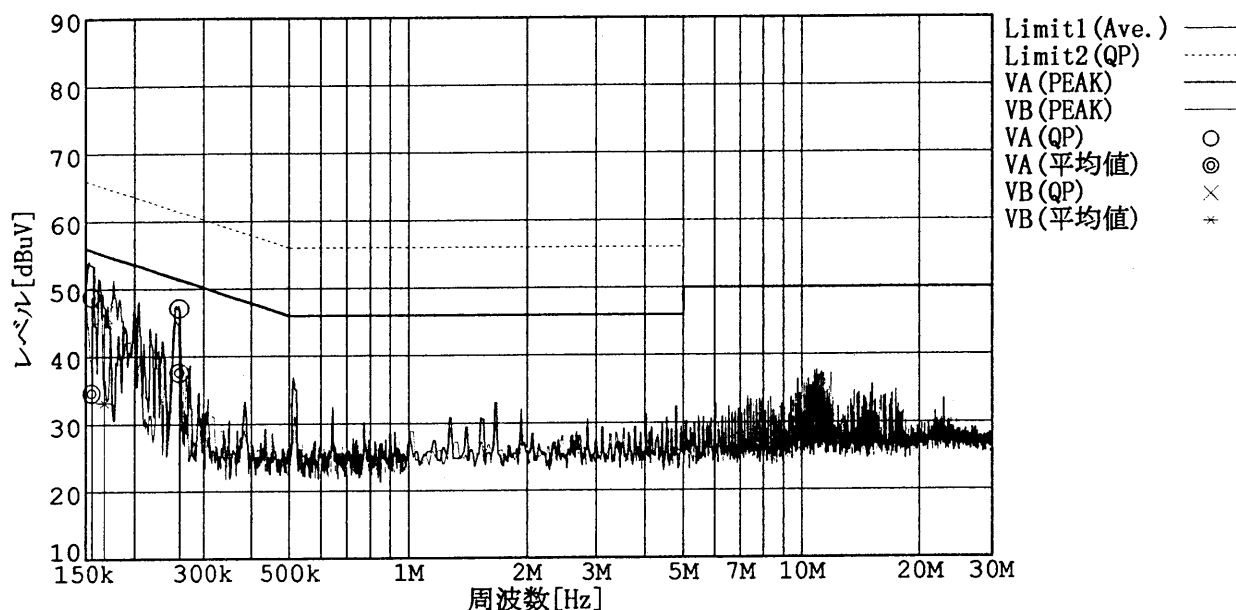

規格 1: [FCC Part15] Class B

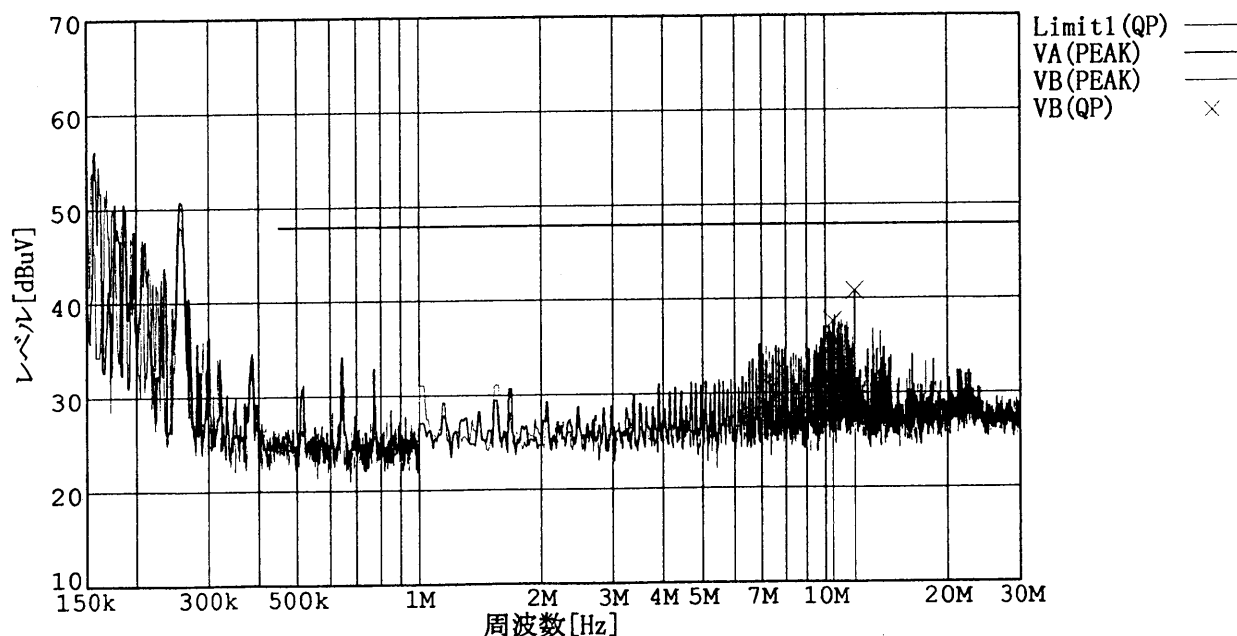

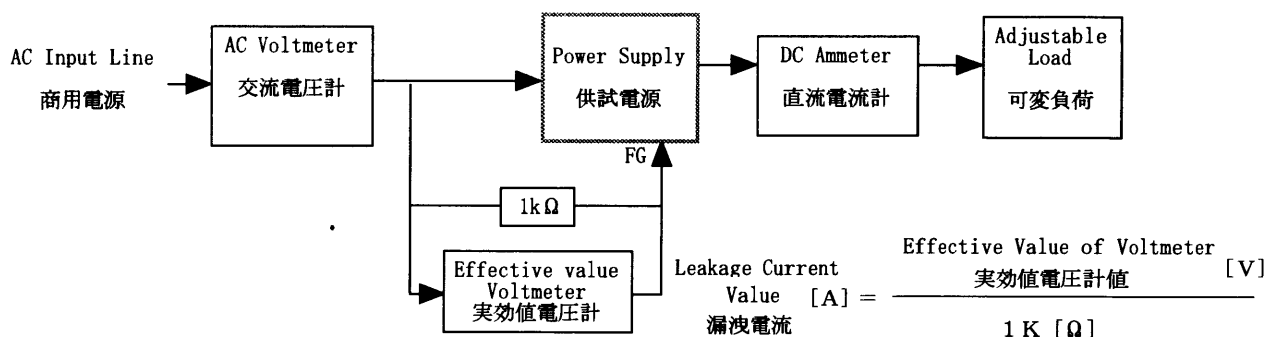
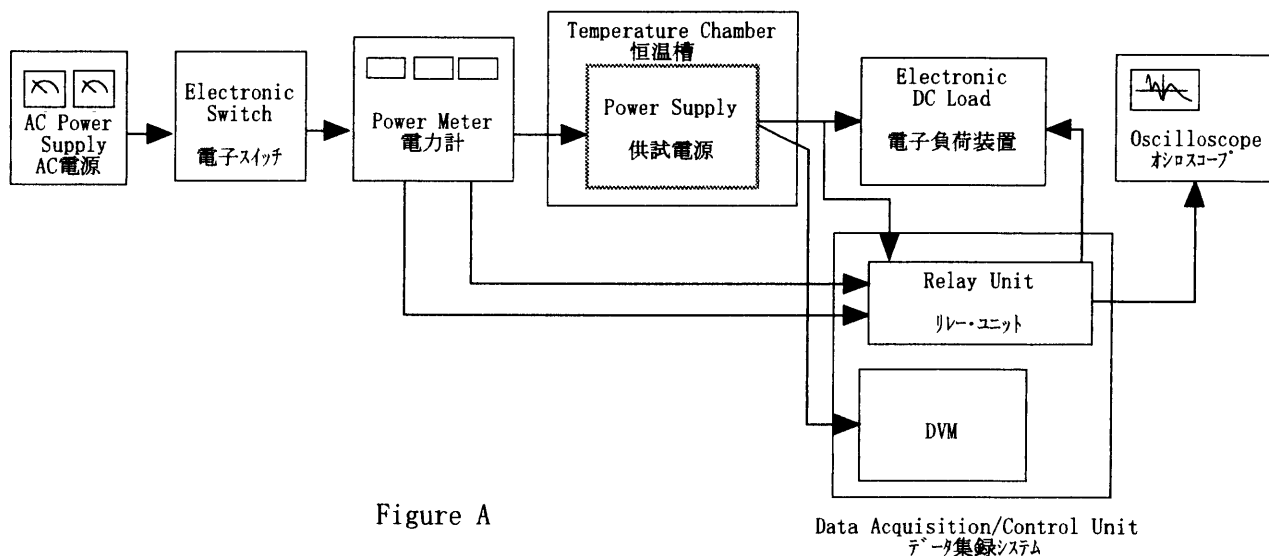


Figure B (DENTORI)

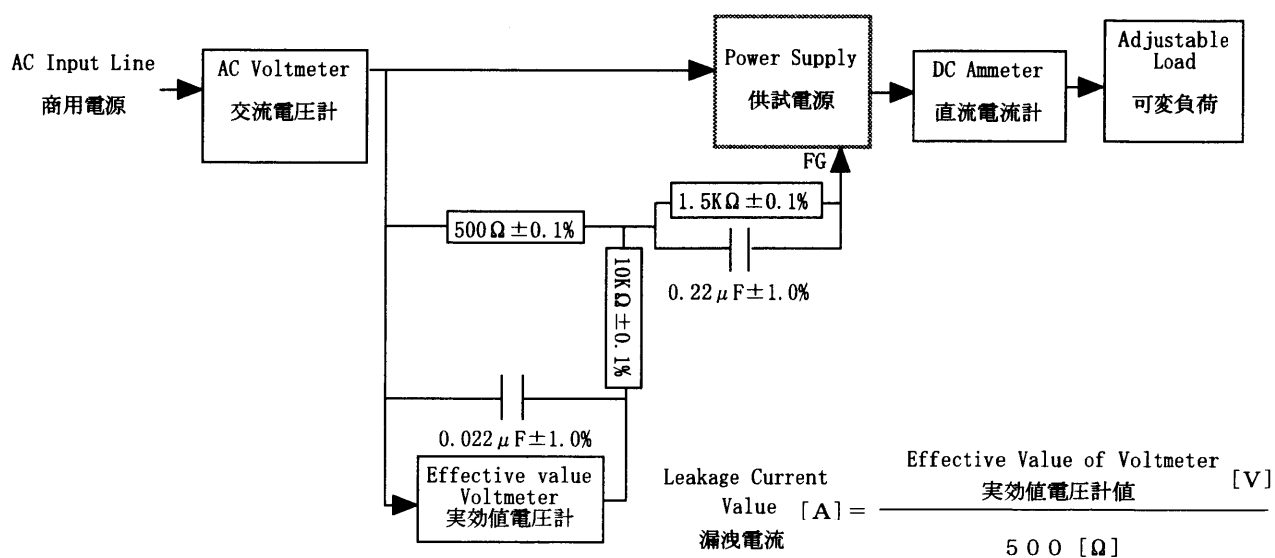


Figure B (IEC 60950)

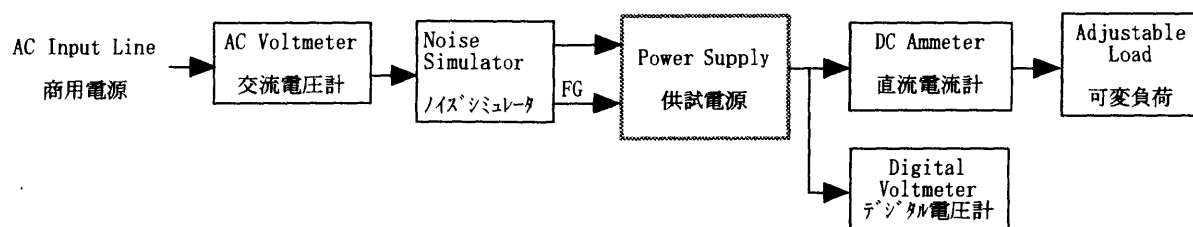


Figure C

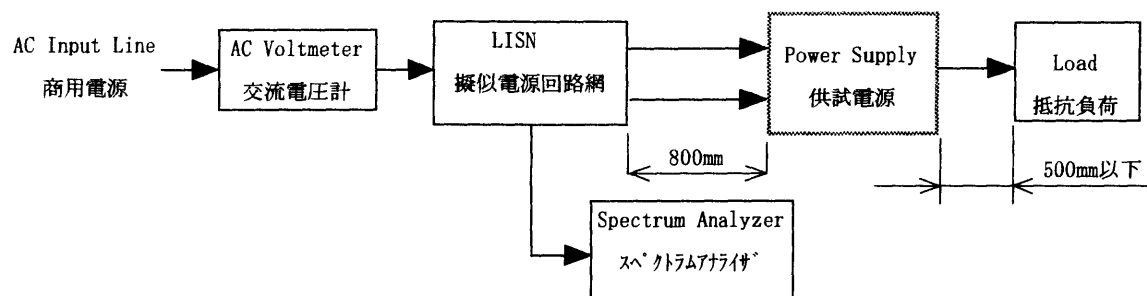


Figure D

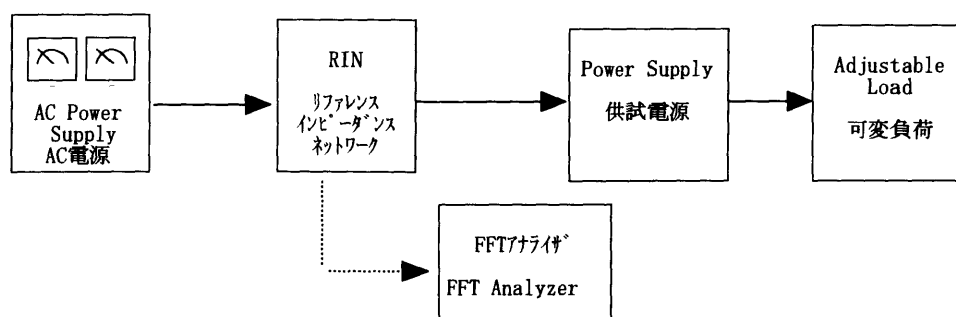


Figure E