



# TEST DATA OF LDA100W-24 (100V INPUT)

Regulated DC Power Supply

Date : Aug. 13. 1999

Approved by : H. Yamaguchi  
Design Manager

Prepared by : J. Asano  
Design Engineer

コーセル株式会社

COSEL CO., LTD.



## CONTENTS

1. Line Regulation . . . . .	1
静的入力変動	
2. Input Current (by Load Current) . . . . .	2
入力電流 (負荷特性)	
3. Input Power (by Load Current) . . . . .	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage) . . . . .	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current) . . . . .	5
効率 (負荷特性)	
6. Hold-Up Time . . . . .	6
出力保持時間	
7. Instantaneous Interruption Compensation . . . . .	7
瞬時停電保障	
8. Load Regulation . . . . .	8
静的負荷変動	
9. Ripple Voltage (by Load Current) . . . . .	9
リップル電圧 (負荷特性)	
10. Ripple-Noise . . . . .	10
リップルノイズ	
11. Overcurrent Protection . . . . .	11
過電流保護	
12. Overvoltage Protection . . . . .	12
過電圧保護	
13. Inrush Current . . . . .	13
突入電流	
14. Dynamic Load Responce . . . . .	14
動的負荷変動	
15. Rise and Fall Time . . . . .	15
立上り、立下がり時間	
16. Ambient Temperature Drift . . . . .	16
周囲温度変動	
17. Minimum Input Voltage for Regulated Output Voltage .	17
最低レギュレーション電圧	
18. Ripple Voltage (by Ambient Temperature) . . . . .	18
リップル電圧 (周囲温度特性)	
19. Time Lapse Drift . . . . .	19
経時ドリフト	
20. Output Voltage Accuracy . . . . .	20
定電圧精度	
21. Condensation . . . . .	21
結露特性	
22. Leakage Current . . . . .	22
漏洩電流	
23. Line Noise Tolerance . . . . .	23
入力雑音耐量	
24. Conducted Emission . . . . .	24
雑音端子電圧	
25. Figure of Testing Circuitry . . . . .	25
測定回路図	

(Final Page 26 )

**COSEL**


Model LDA100W-24

Item Line Regulation 静的入力変動

Object +24.0V 4.3A

Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

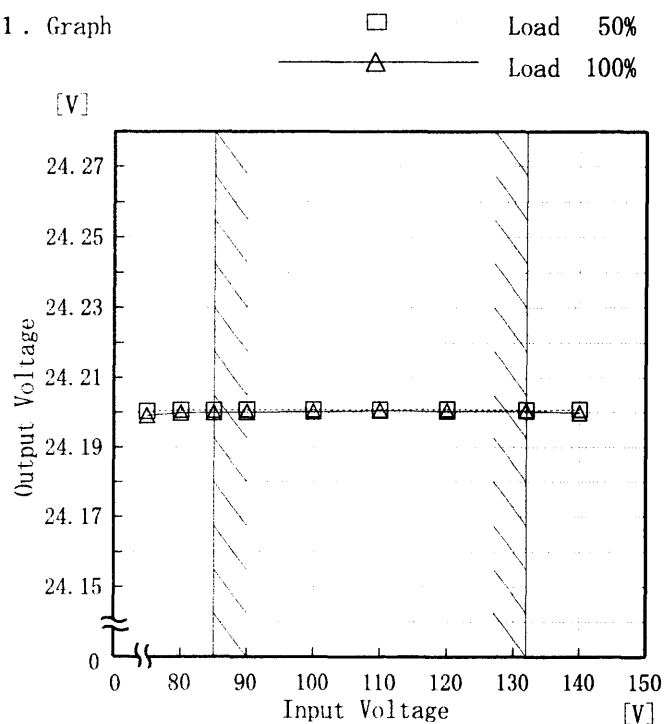

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

## 2. Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
75	24.200	24.199
80	24.201	24.200
85	24.201	24.200
90	24.201	24.200
100	24.201	24.200
110	24.201	24.201
120	24.201	24.200
132	24.201	24.201
140	24.201	24.200

**COSEL**

Model

LDA100W-24

Item

Input Current (by Load Current)  
入力電流 (負荷特性)

Output

—


Temperature

25°C

Testing Circuitry

Figure A

## 1. Graph

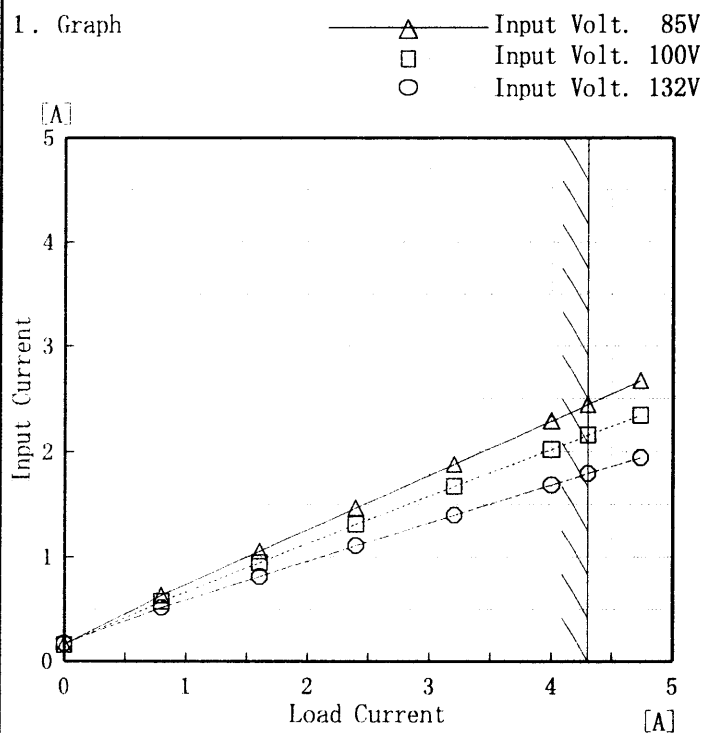

Note: Slanted line shows the range of the rated load current

(注) 斜線は定格負荷電流範囲を示す。

## 2. Values

Load Current [A]	Input Current [A]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
0.00	0.159	0.157	0.169
0.80	0.633	0.578	0.517
1.60	1.052	0.945	0.812
2.40	1.468	1.311	1.107
3.20	1.882	1.672	1.402
4.00	2.291	2.024	1.685
4.30	2.448	2.159	1.794
4.73	2.672	2.347	1.944
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

**COSEL**

Model		LDA100W-24		Temperature 25℃																																																						
Item		Input Power (by Load Current) 入力電力 (負荷特性)		Testing Circuitry Figure A																																																						
Output		_____																																																								
1. Graph		<div><div>—△—</div>Input Volt. 85V</div>		2. Values																																																						
		<div><div>—□—</div>Input Volt. 100V</div>																																																								
		<div><div>—○—</div>Input Volt. 132V</div>																																																								
<div><div><div>Input Power [W]</div><div>200</div><div>150</div><div>100</div><div>50</div><div>0</div></div><div><div>Load Current [A]</div><div>0</div><div>1</div><div>2</div><div>3</div><div>4</div><div>5</div></div></div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Power [W]</th></tr><tr><th>Input Volt. 85 [V]</th><th>Input Volt. 100 [V]</th><th>Input Volt. 132 [V]</th></tr><tr><td>0.00</td><td>3.93</td><td>4.83</td><td>6.79</td></tr><tr><td>0.80</td><td>27.84</td><td>28.33</td><td>31.22</td></tr><tr><td>1.60</td><td>49.59</td><td>49.95</td><td>52.60</td></tr><tr><td>2.40</td><td>71.57</td><td>71.70</td><td>74.10</td></tr><tr><td>3.20</td><td>94.10</td><td>93.80</td><td>95.90</td></tr><tr><td>4.00</td><td>116.90</td><td>116.30</td><td>117.70</td></tr><tr><td>4.30</td><td>125.70</td><td>124.80</td><td>126.00</td></tr><tr><td>4.73</td><td>138.20</td><td>137.00</td><td>138.00</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>		Load Current [A]	Input Power [W]			Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]	0.00	3.93	4.83	6.79	0.80	27.84	28.33	31.22	1.60	49.59	49.95	52.60	2.40	71.57	71.70	74.10	3.20	94.10	93.80	95.90	4.00	116.90	116.30	117.70	4.30	125.70	124.80	126.00	4.73	138.20	137.00	138.00	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Power [W]																																																									
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]																																																							
0.00	3.93	4.83	6.79																																																							
0.80	27.84	28.33	31.22																																																							
1.60	49.59	49.95	52.60																																																							
2.40	71.57	71.70	74.10																																																							
3.20	94.10	93.80	95.90																																																							
4.00	116.90	116.30	117.70																																																							
4.30	125.70	124.80	126.00																																																							
4.73	138.20	137.00	138.00																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
Note: Slanted line shows the range of the rated load current																																																										
(注)斜線は定格負荷電流範囲を示す。																																																										

# COSEL

Model		LDA100W-24	
Item		Efficiency 効率	
Object			

1. Graph

□

Load 50%

△

Load 100%

Efficiency [%]

86

82

78

74

70

66

62

0

0

80

90

100

110

120

130

140

150

Input Voltage [V]


Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
75	80.3	81.5
80	80.8	82.8
85	81.2	83.4
90	81.3	83.9
100	80.8	84.1
110	80.0	83.9
120	79.0	83.7
132	77.8	83.2
140	76.9	82.8

**COSEL**

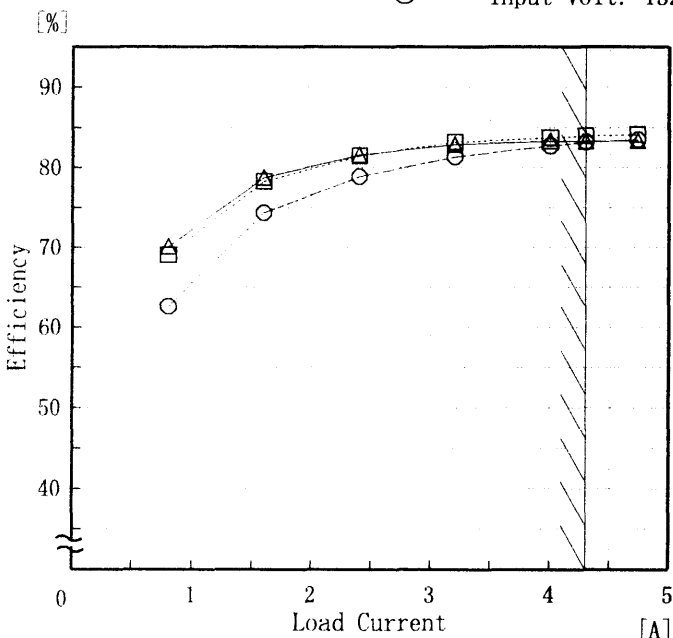Model		LDA100W-24		Temperature		25℃																																																								
Item		Efficiency (by Load Current) 効率 (負荷電流特性)		Testing Circuitry		Figure A																																																								
Output		_____																																																												
1. Graph				2. Values																																																										
<div><div>△</div>Input Volt. 85V</div> <div><div>□</div>Input Volt. 100V</div> <div><div>○</div>Input Volt. 132V</div> <div><div>Efficiency [%]</div><div><div>90</div><div>80</div><div>70</div><div>60</div><div>50</div><div>40</div></div><div><div>0</div><div>1</div><div>2</div><div>3</div><div>4</div><div>5</div></div><div>Load Current [A]</div></div>  <div>Note: Slanted line shows the range of the rated load current</div> <div>(注)斜線は定格負荷電流範囲を示す。</div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Efficiency [%]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>0.80</td><td>70.1</td><td>69.0</td><td>62.6</td></tr><tr><td>1.60</td><td>78.8</td><td>78.3</td><td>74.3</td></tr><tr><td>2.40</td><td>81.6</td><td>81.5</td><td>78.9</td></tr><tr><td>3.20</td><td>82.9</td><td>83.2</td><td>81.4</td></tr><tr><td>4.00</td><td>83.3</td><td>83.8</td><td>82.8</td></tr><tr><td>4.30</td><td>83.3</td><td>84.0</td><td>83.2</td></tr><tr><td>4.73</td><td>83.4</td><td>84.1</td><td>83.5</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Efficiency [%]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.80	70.1	69.0	62.6	1.60	78.8	78.3	74.3	2.40	81.6	81.5	78.9	3.20	82.9	83.2	81.4	4.00	83.3	83.8	82.8	4.30	83.3	84.0	83.2	4.73	83.4	84.1	83.5	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Efficiency [%]																																																													
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																											
0.80	70.1	69.0	62.6																																																											
1.60	78.8	78.3	74.3																																																											
2.40	81.6	81.5	78.9																																																											
3.20	82.9	83.2	81.4																																																											
4.00	83.3	83.8	82.8																																																											
4.30	83.3	84.0	83.2																																																											
4.73	83.4	84.1	83.5																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											

-5-

BC-4096

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。


**COSEL**

Model LDA100W-24

Item Hold-Up Time 出力保持時間

Object  $\pm 24.0\text{V } 4.3\text{A}$ Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

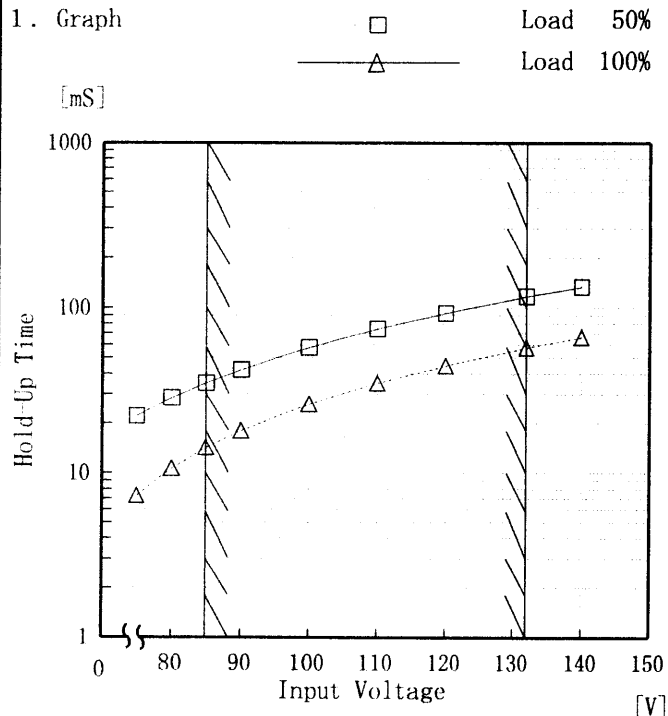

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated input voltage.

出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。

(注) 斜線は定格入力電圧範囲を示す。

## 2. Values

Input Voltage [V]	Hold-Up Time [mS]	
	Load 50%	Load 100%
75	22	7
80	28	11
85	35	14
90	42	18
100	57	26
110	74	35
120	93	45
132	117	58
140	134	67





# COSEL

Model		LDA100W-24		Temperature		25℃																																																	
Item		Instantaneous Interruption Compensation 瞬時停電保障		Testing Circuitry		Figure A																																																	
Object		+24.0V4.3A																																																					
1. Graph				2. Values																																																			
<div><div>△</div> Input Volt. 85 V</div> <div><div>□</div> Input Volt. 100 V</div> <div><div>○</div> Input Volt. 132 V</div> <div><div>Instantaneous Compensation Time [mS]</div><div><div>1000</div><div>100</div><div>10</div><div>1</div></div><div><div>0</div><div>1</div><div>2</div><div>3</div><div>4</div><div>5</div></div><div><div>Load Current [A]</div></div><table><thead><tr><th>Load Current [A]</th><th>85[V] [mS]</th><th>100[V] [mS]</th><th>132[V] [mS]</th></tr></thead><tbody><tr><td>0.00</td><td>—</td><td>—</td><td>—</td></tr><tr><td>0.80</td><td>82</td><td>132</td><td>272</td></tr><tr><td>1.60</td><td>42</td><td>66</td><td>147</td></tr><tr><td>2.40</td><td>26</td><td>42</td><td>103</td></tr><tr><td>3.20</td><td>18</td><td>33</td><td>78</td></tr><tr><td>4.00</td><td>10</td><td>26</td><td>61</td></tr><tr><td>4.30</td><td>10</td><td>17</td><td>54</td></tr><tr><td>4.73</td><td>9</td><td>17</td><td>47</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></tbody></table></div>				Load Current [A]	85[V] [mS]	100[V] [mS]	132[V] [mS]	0.00	—	—	—	0.80	82	132	272	1.60	42	66	147	2.40	26	42	103	3.20	18	33	78	4.00	10	26	61	4.30	10	17	54	4.73	9	17	47	—	—	—	—	—	—	—	—	—	—	—	—				
Load Current [A]	85[V] [mS]	100[V] [mS]	132[V] [mS]																																																				
0.00	—	—	—																																																				
0.80	82	132	272																																																				
1.60	42	66	147																																																				
2.40	26	42	103																																																				
3.20	18	33	78																																																				
4.00	10	26	61																																																				
4.30	10	17	54																																																				
4.73	9	17	47																																																				
—	—	—	—																																																				
—	—	—	—																																																				
—	—	—	—																																																				
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note:Slanted line shows the range of the rated load current.</p> <p>瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>																																																							

**COSEL**

Model		LDA100W-24	Temperature		25℃																																														
Item		Load Regulation 静的負荷変動	Testing Circuitry		Figure A																																														
Object		+24.0V4.3A																																																	
1. Graph		2. Values																																																	
<div><div><div>△</div><div>Input Volt. 85 V</div></div><div><div>□</div><div>Input Volt. 100 V</div></div><div><div>○</div><div>Input Volt. 132 V</div></div></div> <div><div><div>Output Voltage [V]</div><div><div>Load Current [A]</div></div></div></div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>0.00</td><td>24.202</td><td>24.201</td><td>24.201</td></tr><tr><td>0.80</td><td>24.200</td><td>24.200</td><td>24.200</td></tr><tr><td>1.60</td><td>24.200</td><td>24.200</td><td>24.200</td></tr><tr><td>2.40</td><td>24.200</td><td>24.200</td><td>24.200</td></tr><tr><td>3.20</td><td>24.200</td><td>24.200</td><td>24.200</td></tr><tr><td>4.00</td><td>24.200</td><td>24.200</td><td>24.200</td></tr><tr><td>4.30</td><td>24.200</td><td>24.200</td><td>24.200</td></tr><tr><td>4.73</td><td>24.200</td><td>24.200</td><td>24.200</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>			Load Current [A]	Output Voltage [V]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	24.202	24.201	24.201	0.80	24.200	24.200	24.200	1.60	24.200	24.200	24.200	2.40	24.200	24.200	24.200	3.20	24.200	24.200	24.200	4.00	24.200	24.200	24.200	4.30	24.200	24.200	24.200	4.73	24.200	24.200	24.200	—	—	—	—	—	—	—	—
Load Current [A]	Output Voltage [V]																																																		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																
0.00	24.202	24.201	24.201																																																
0.80	24.200	24.200	24.200																																																
1.60	24.200	24.200	24.200																																																
2.40	24.200	24.200	24.200																																																
3.20	24.200	24.200	24.200																																																
4.00	24.200	24.200	24.200																																																
4.30	24.200	24.200	24.200																																																
4.73	24.200	24.200	24.200																																																
—	—	—	—																																																
—	—	—	—																																																
Note: Slanted line shows the range of the rated load current.																																																			
(注)斜線は定格負荷電流範囲を示す。																																																			


# COSEL

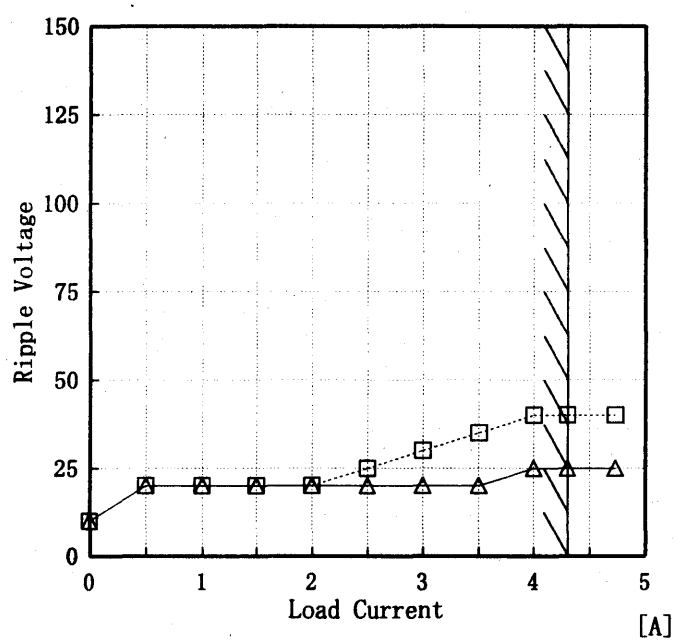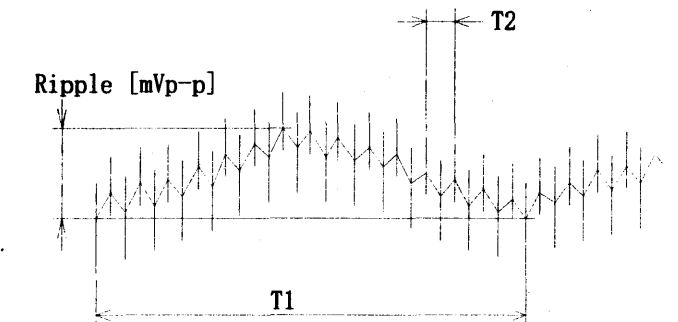Model		LDA100W-24																																							
Item	Ripple Voltage (by Load Current) リップル電圧 (負荷電流特性)		Temperature 25℃ Testing Circuitry Figure A																																						
Object	+24.0V 4.3A																																								
1. Graph		2. Values																																							
<div><div>□</div> Input Volt. 85V</div> <div><div>△</div> Input Volt. 132V</div> 		<table><tr><th rowspan="2">Load Current [A]</th><th>Input Volt. 85 [V]</th><th>Input Volt. 132 [V]</th></tr><tr><th>Ripple Output Volt. [mV]</th><th>Ripple Output Volt. [mV]</th></tr><tr><td>0.00</td><td>10</td><td>10</td></tr><tr><td>0.50</td><td>20</td><td>20</td></tr><tr><td>1.00</td><td>20</td><td>20</td></tr><tr><td>1.50</td><td>20</td><td>20</td></tr><tr><td>2.00</td><td>20</td><td>20</td></tr><tr><td>2.50</td><td>25</td><td>20</td></tr><tr><td>3.00</td><td>30</td><td>20</td></tr><tr><td>3.50</td><td>35</td><td>20</td></tr><tr><td>4.00</td><td>40</td><td>25</td></tr><tr><td>4.30</td><td>40</td><td>25</td></tr><tr><td>4.73</td><td>40</td><td>25</td></tr></table>		Load Current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.00	10	10	0.50	20	20	1.00	20	20	1.50	20	20	2.00	20	20	2.50	25	20	3.00	30	20	3.50	35	20	4.00	40	25	4.30	40	25	4.73	40	25
Load Current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]																																							
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																							
0.00	10	10																																							
0.50	20	20																																							
1.00	20	20																																							
1.50	20	20																																							
2.00	20	20																																							
2.50	25	20																																							
3.00	30	20																																							
3.50	35	20																																							
4.00	40	25																																							
4.30	40	25																																							
4.73	40	25																																							
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p-p 値で示される。</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p> <div><div>T1: Due to AC Input Line 入力商用周期</div><div>T2: Due to Switching スイッチング周期</div></div>																																									
<p>Fig. Complex Ripple Wave Form</p> <p>図 リップル波形詳細図</p>																																									

**COSEL**

Model		LDA100W-24	Temperature		25℃																																												
Item		Ripple-Noise   リップルノイズ	Testing Circuitry		Figure A																																												
Object		+24.0V4.3A																																															
1. Graph			2. Values																																														
<div><div>-----□-----    Input Volt. 85V</div><div>-----△-----    Input Volt. 132V</div><div><div>[mV]</div><div><div>Ripple-Noise</div><div>Load Current</div><div>[A]</div></div></div></div>			<table><tr><th rowspan="2">Load current</th><th>Input Volt.</th><th>Input Volt.</th></tr><tr><th>85 [V]</th><th>132 [V]</th></tr><tr><th>[A]</th><th>Ripple-Noise</th><th>Ripple-Noise</th></tr><tr><th></th><th>[mV]</th><th>[mV]</th></tr><tr><td>0.00</td><td>20</td><td>20</td></tr><tr><td>0.50</td><td>25</td><td>30</td></tr><tr><td>1.00</td><td>30</td><td>35</td></tr><tr><td>1.50</td><td>35</td><td>35</td></tr><tr><td>2.00</td><td>35</td><td>40</td></tr><tr><td>2.50</td><td>40</td><td>40</td></tr><tr><td>3.00</td><td>45</td><td>40</td></tr><tr><td>3.50</td><td>50</td><td>45</td></tr><tr><td>4.00</td><td>50</td><td>45</td></tr><tr><td>4.30</td><td>55</td><td>45</td></tr><tr><td>4.73</td><td>55</td><td>45</td></tr></table>			Load current	Input Volt.	Input Volt.	85 [V]	132 [V]	[A]	Ripple-Noise	Ripple-Noise		[mV]	[mV]	0.00	20	20	0.50	25	30	1.00	30	35	1.50	35	35	2.00	35	40	2.50	40	40	3.00	45	40	3.50	50	45	4.00	50	45	4.30	55	45	4.73	55	45
Load current	Input Volt.	Input Volt.																																															
	85 [V]	132 [V]																																															
[A]	Ripple-Noise	Ripple-Noise																																															
	[mV]	[mV]																																															
0.00	20	20																																															
0.50	25	30																																															
1.00	30	35																																															
1.50	35	35																																															
2.00	35	40																																															
2.50	40	40																																															
3.00	45	40																																															
3.50	50	45																																															
4.00	50	45																																															
4.30	55	45																																															
4.73	55	45																																															
<p>Ripple-Noise is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図 p-p 値で示される。</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p> <div><div>T1: Due to AC Input Line 入力商用周期</div><div>T2: Due to Switching スイッチング周期</div><div><div>Ripple-Noise</div><div>[mVp-p]</div></div></div>																																																	
<p>Fig. Complex Ripple Wave Form</p> <p>図   リップル波形詳細図</p>																																																	

**COSEL**

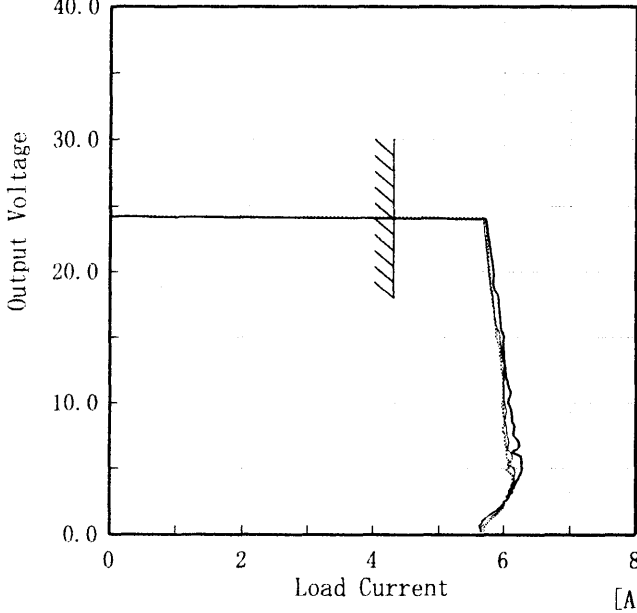Model		LDA100W-24	Temperature25℃ Testing Circuitry Figure A
Item		Overcurrent Protection 過電流保護	
Object		+24.0V4.3A	
1. Graph			
		----- Input Volt. 85 V ----- Input Volt. 100 V ----- Input Volt. 132 V	2. Values
[V]			
			
Note: Slanted line shows the range of the rated load current.			
(注)斜線は定格負荷電流範囲を示す。			

Output Voltage [V]	Load Current [A]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
24.00	5.72	5.67	5.71
22.80	5.73	5.70	5.75
21.60	5.74	5.72	5.78
19.20	5.79	5.78	5.83
16.80	5.85	5.85	5.93
14.40	5.92	5.95	5.99
12.00	5.99	6.00	6.03
9.60	5.98	6.02	6.10
7.20	6.03	6.06	6.17
4.80	6.05	6.16	6.26
2.40	6.04	5.99	6.03
0.00	5.68	5.63	5.65

-11-

BC-4096

# COSEL

COSEL

Model	LDA100W-24
Item	Overvoltage Protection 過電圧保護
Object	+ 24.0V4.3A

1. Graph

—△—

Input Volt. 85 V

—□—

Input Volt. 100 V

—○—

Input Volt. 132 V

[V]

Operating Point

Ambient Temperature [°C]

Load 0%

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

Testing Circuitry      Figure A

2. Values


Ambient Temperature [°C]	Operating Point [V]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
-20	29.53	29.48	29.48
-10	29.71	29.71	29.72
0	29.95	29.95	29.95
10	30.13	30.13	30.13
20	30.37	30.37	30.37
25	30.48	30.49	30.49
30	30.60	30.61	30.61
40	30.78	30.79	30.79
50	31.02	31.02	31.02
60	31.20	31.20	31.20
—	—	—	—

-12-

BC-4096

**COSEL**

Model	LDA100W-24	Temperature 25°C Testing Circuitry Figure A
Item	Inrush Current 突入電流	
Object	_____	

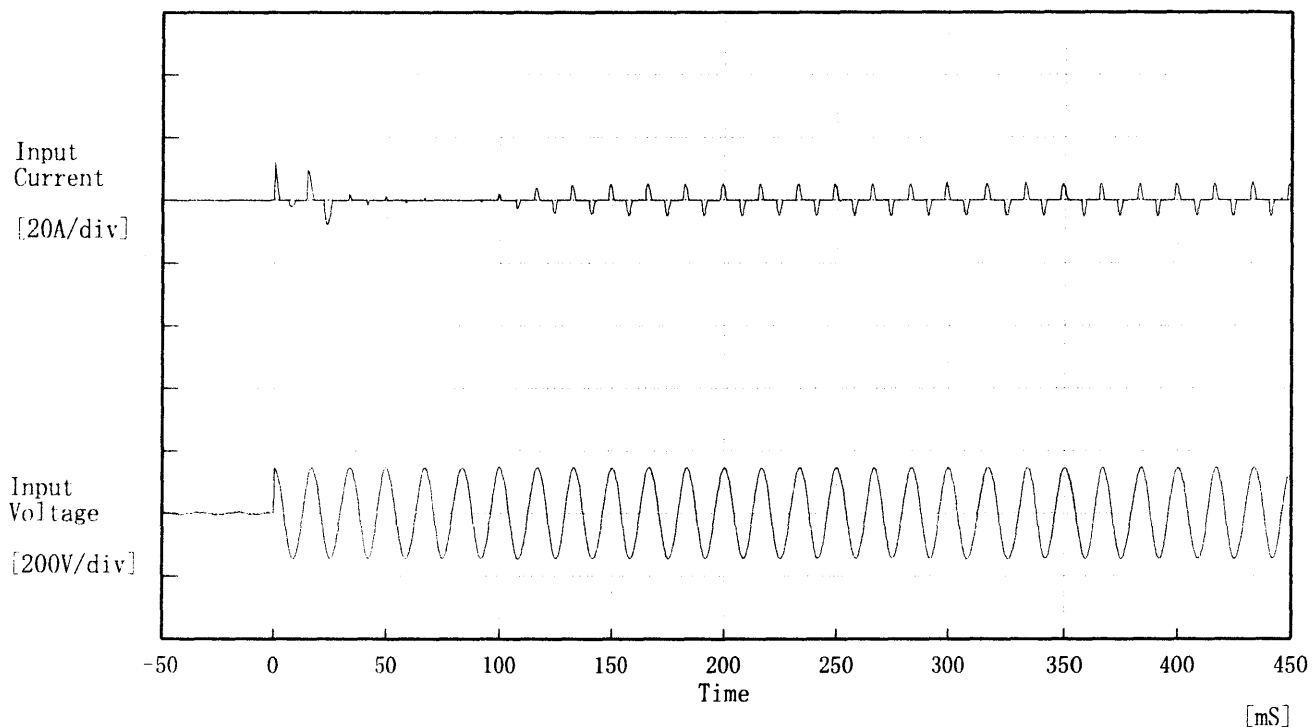

Input Voltage 100 V


Frequency 60 Hz

Load 100 %

Inrush Current

① 11.88 [A]

② 5.48 [A]

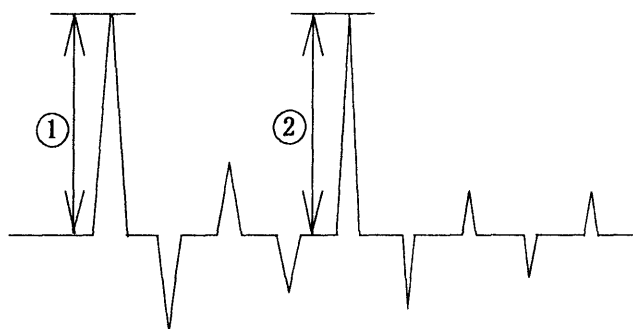

**COSEL**

Model	LDA100W-24	Temperature	25°C
Item	Dynamic Load Responce 動的負荷変動	Testing Circuitry	Figure A
Object	+24.0V4.3A		


Input Volt. 100 V

Cycle 1000 mS

Load Current


Load 0% ↔

Load 100 %

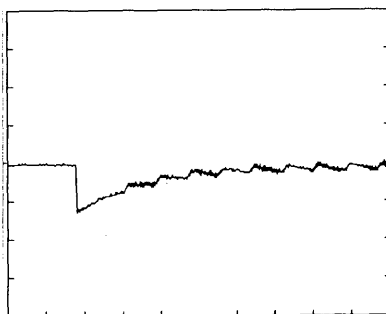

Load 0% ↔

Load 50 %

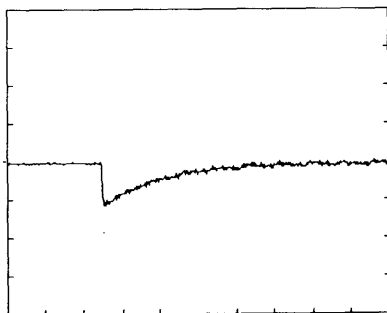

100 mV/div

10 mS/div




**COSEL**

Model	LDA100W-24	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+24.0V 4.3A		

## 1. Graph


Input Volt. 85 V

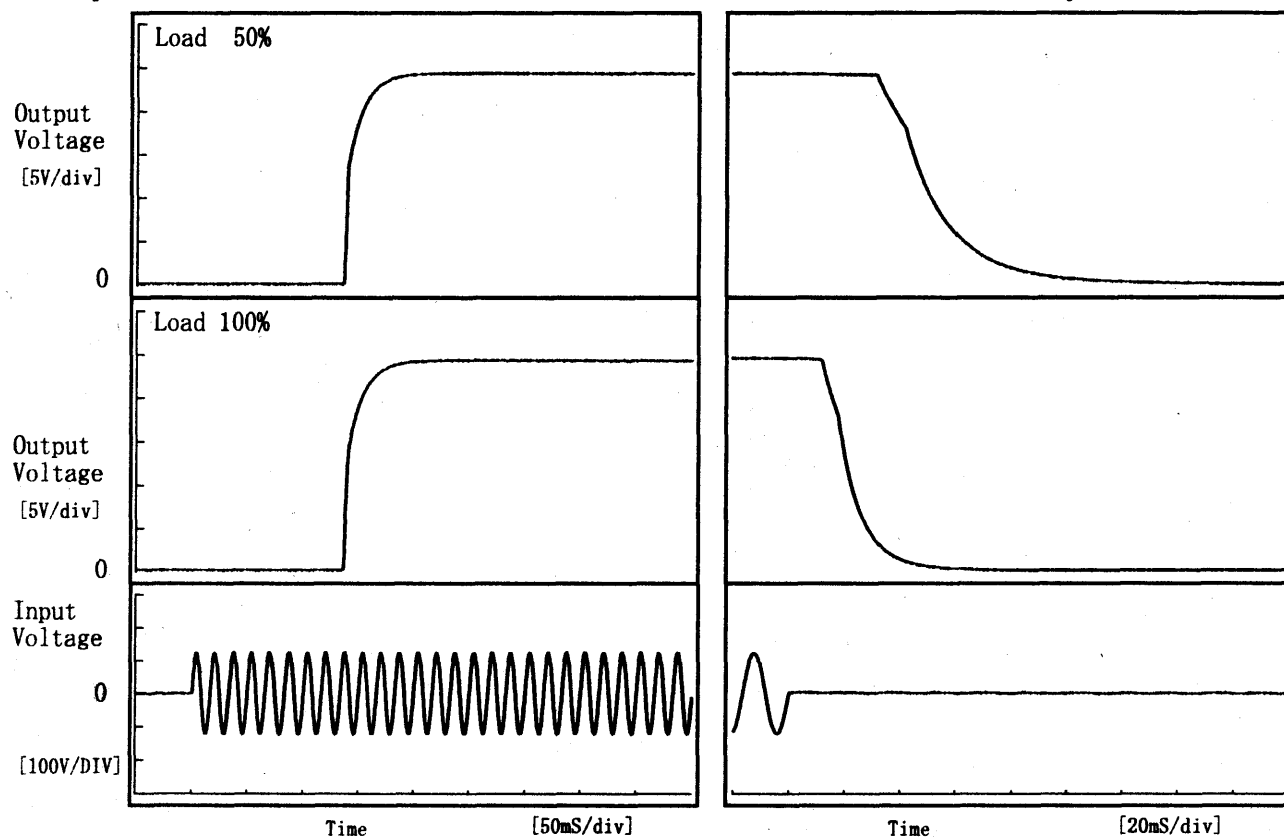

## 2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	136.5	23.3	159.8	35.3	39.7
100 %	136.5	23.5	160.0	14.2	20.7

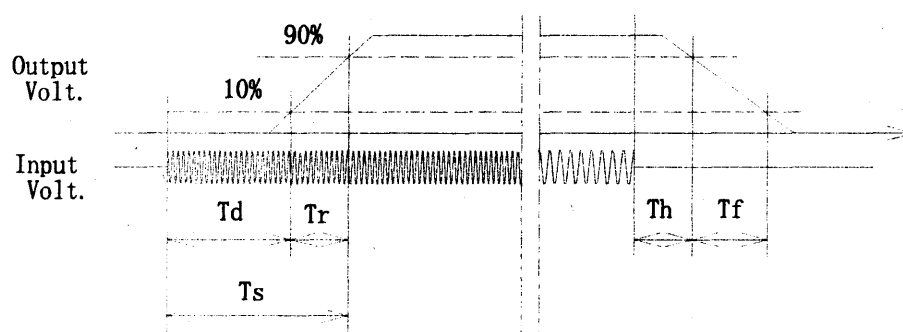

**COSEL**

Model		LDA100W-24
Item	Ambient Temperature Drift 周囲温度変動	
Object	+24.0V 4.3A	

1. Graph

△

□

○

Input Volt. 85V

Input Volt. 100V

Input Volt. 132V

Output Voltage [V]

<

# COSEL

Model

LDA100W-24

Item


Minimum Input Voltage for Regulated Output Voltage  
最低レギュレーション電圧

Object

+24.0V 4.3A

Testing Circuitry Figure A

## 1. Graph

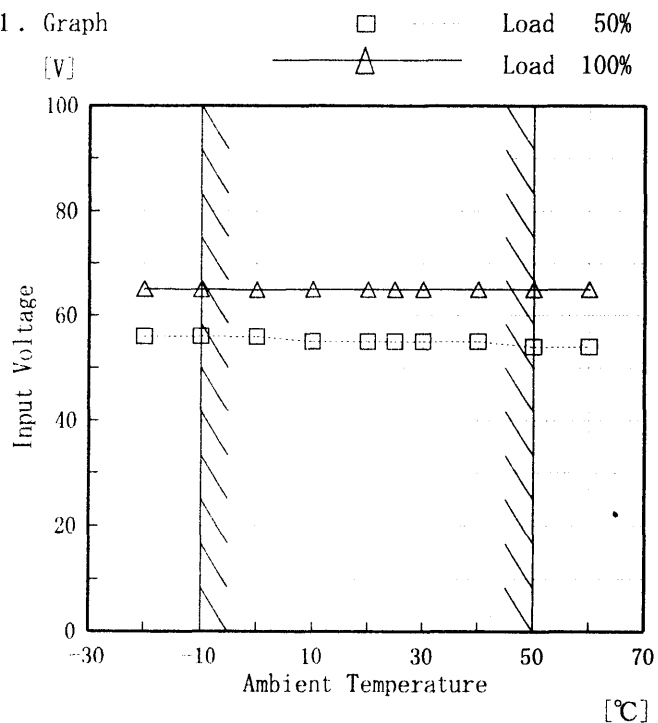

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

## 2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-20	56	65
-10	56	65
0	56	65
10	55	65
20	55	65
25	55	65
30	55	65
40	55	65
50	54	65
60	54	65
—	—	—

**COSEL**

Model LDA100W-24		Testing Circuitry Figure A																																				
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)																																					
Object	+24.0V4.3A																																					
<p>1. Graph</p> <p>□ Load 50% △ Load 100%</p> <p>[mV]</p> <p>Ripple Voltage</p> <p>Ambient Temperature [°C]</p> <p>Input Volt. 100 V</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注) 斜線は定格周囲温度範囲を示す。</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th>Ambient Temp. [°C]</th><th>Load 50% Ripple Output Volt. [mV]</th><th>Load 100% Ripple Output Volt. [mV]</th></tr> </thead> <tbody> <tr><td>-20</td><td>40</td><td>55</td></tr> <tr><td>-10</td><td>30</td><td>40</td></tr> <tr><td>0</td><td>25</td><td>35</td></tr> <tr><td>10</td><td>25</td><td>30</td></tr> <tr><td>20</td><td>20</td><td>30</td></tr> <tr><td>25</td><td>20</td><td>30</td></tr> <tr><td>30</td><td>20</td><td>25</td></tr> <tr><td>40</td><td>20</td><td>25</td></tr> <tr><td>50</td><td>20</td><td>25</td></tr> <tr><td>60</td><td>20</td><td>25</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]	-20	40	55	-10	30	40	0	25	35	10	25	30	20	20	30	25	20	30	30	20	25	40	20	25	50	20	25	60	20	25	—	—	—
Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]																																				
-20	40	55																																				
-10	30	40																																				
0	25	35																																				
10	25	30																																				
20	20	30																																				
25	20	30																																				
30	20	25																																				
40	20	25																																				
50	20	25																																				
60	20	25																																				
—	—	—																																				

**COSEL**


Model LDA100W-24

Item Time Lapse Drift 経時ドリフト

Object +24.0V4.3A

Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

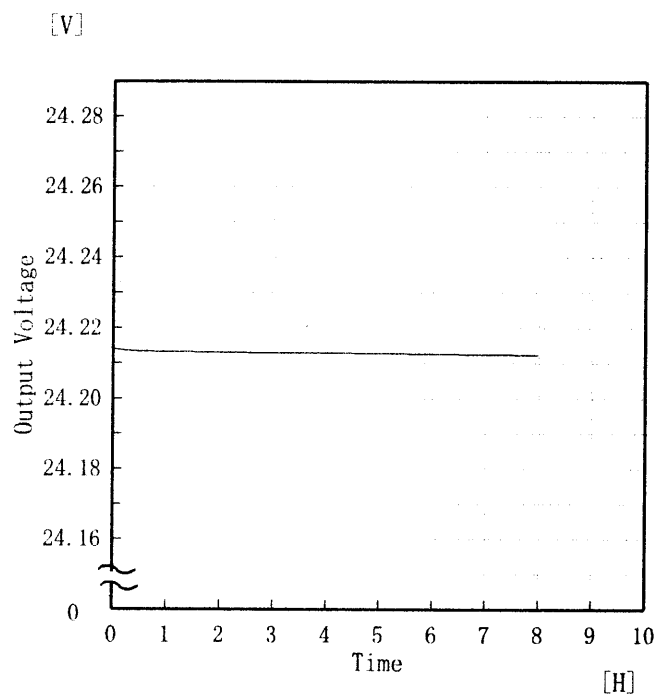

## 2. Values

Time since start [H]	Output Voltage [V]
0.0	24.214
0.5	24.213
1.0	24.213
2.0	24.213
3.0	24.213
4.0	24.213
5.0	24.213
6.0	24.213
7.0	24.212
8.0	24.212

# COSEL

Model		LDA100W-24	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+24.0V4.3A	

## Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 85~132 V

Load Current : 0~4.3 A

\* Output Voltage Accuracy =  $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ratio) =  $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

## 定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -10~50 °C

入力電圧 : 85~132 V

負荷電流 : 0~4.3 A

\* 定電圧精度(変動値) =  $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

\* 定電圧精度(変動率) =  $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ratio) [%]
Maximum Voltage	-10	85	0.0	24.241	±38	±0.2
Minimum Voltage	50	132	4.3	24.166		



**COSEL**

Model		LDA100W-24	Temperature		25℃
Item		Leakage Current 漏洩電流	Testing Circuitry		Figure B
Object					

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	0.23	0.26	0.37
(B) IEC60950	0.24	0.27	0.38

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	—	—	—

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力 of 両相について測定し、その大きい方を漏洩電流測定値とする。



**COSEL**

Model	LDA100W-24	Temperature	25°C
Item	Line Noise Tolerance 入力雑音耐量	Testing Circuitry	Figure C
Object	+24.0V4.3A		

## 1. Results

Pulse Width [ nS ]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

## 2. Conditions

Input Voltage : 100 V  
 Pulse Voltage : 2000 V  
 Pulse Cycle : 10 mS  
 Pulse Input Duration : 1 min. or more  
 Load : 100 %

# COSEL

Model	LDA100W-24	Temperature	25℃
Item	Conducted Emission 雑音端子電圧	Testing Circuitry	Figure D
Object			

## 1. Graph

### Remarks


Input Volt. 100 V (VCCI Class B)

120 V (FCC Class B)


Load 100 %

規格 1: [VCCI] Class B(平均値)

規格 2: [VCCI] Class B(QP)

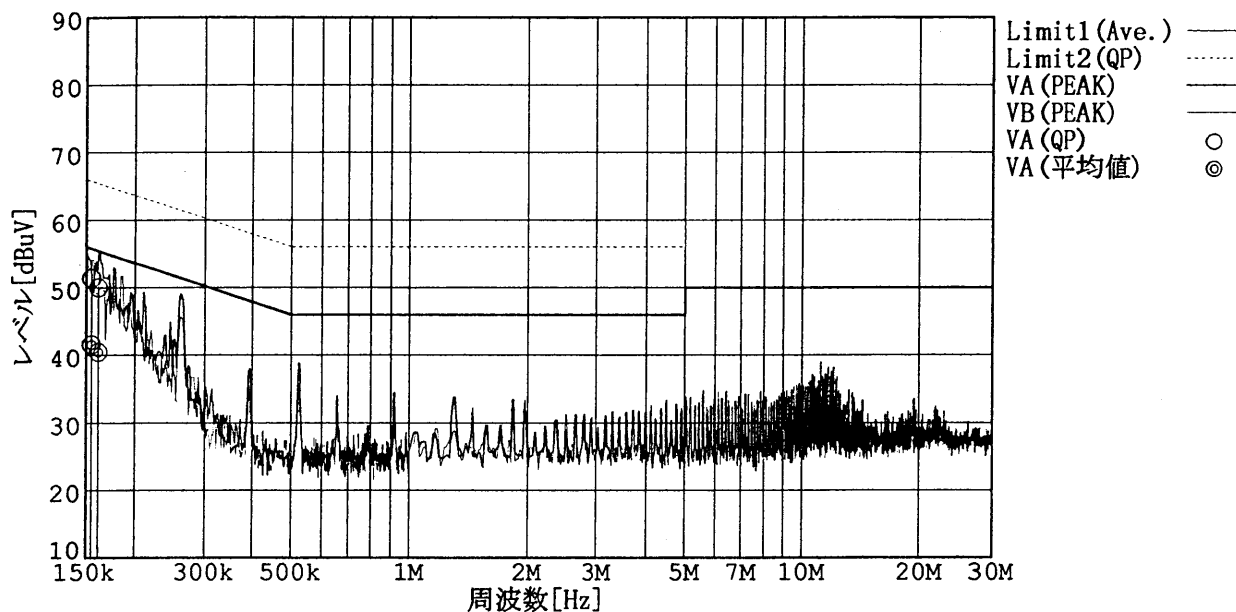

規格 1: [FCC Part15] Class B

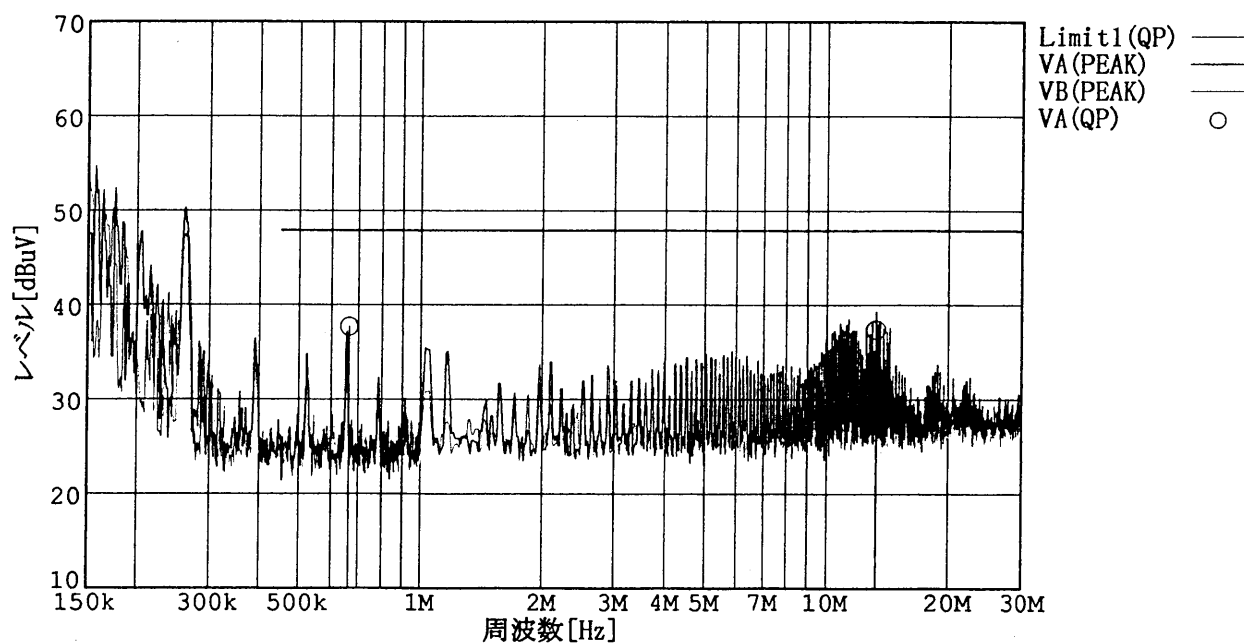

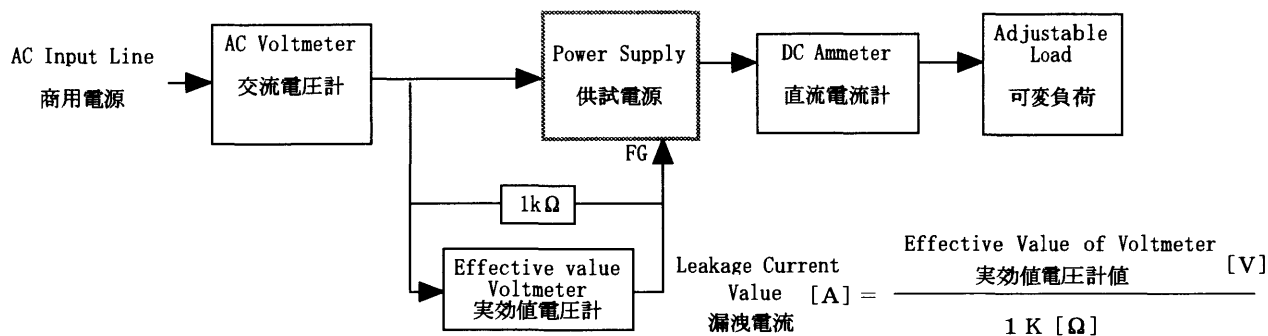
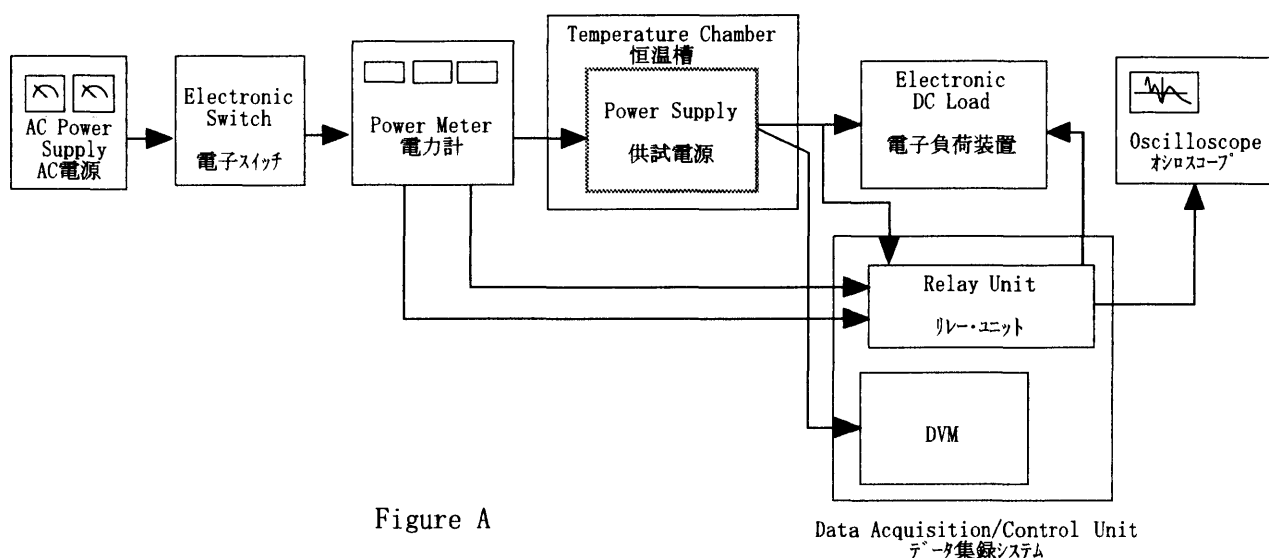


Figure B (DENTORI)

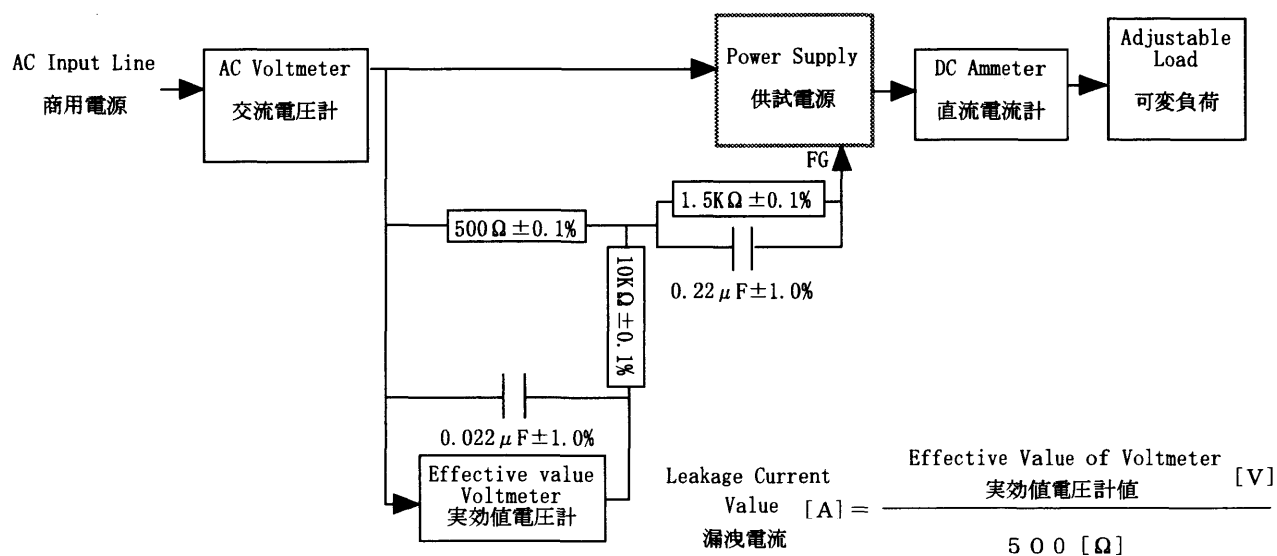


Figure B (IEC 60950)

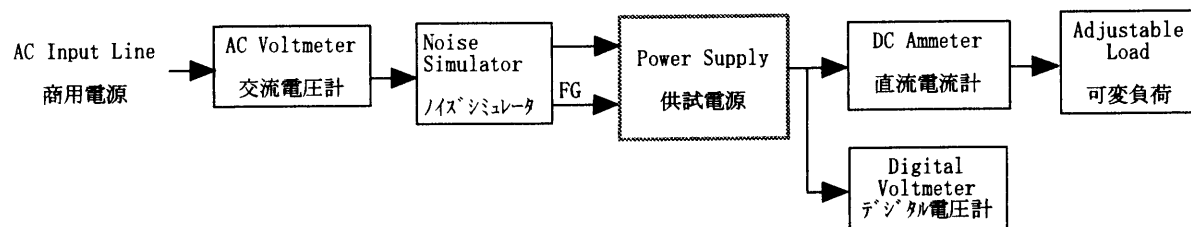


Figure C

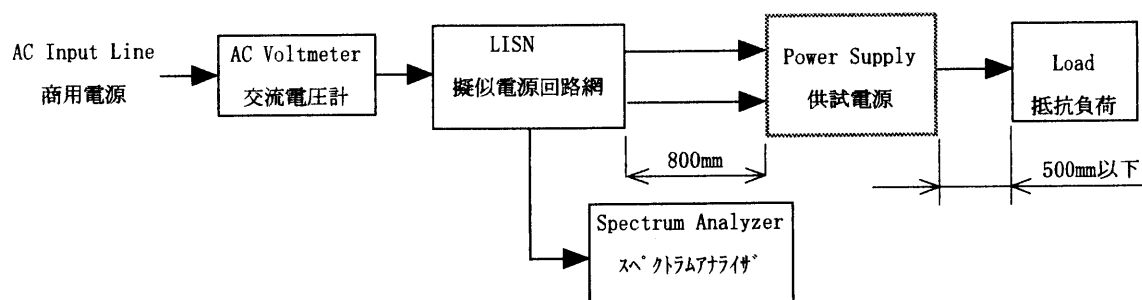


Figure D

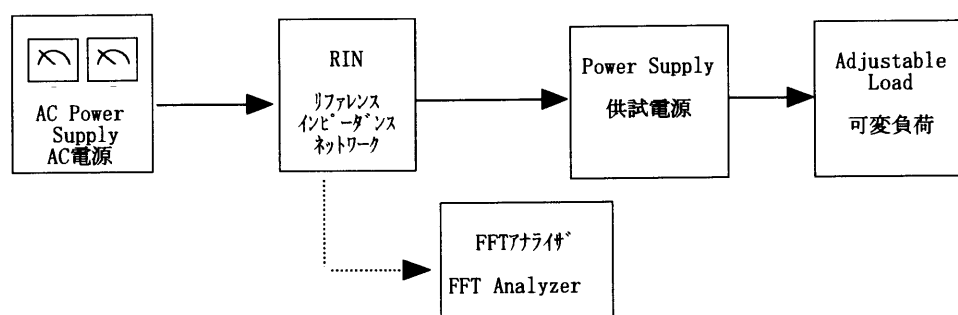


Figure E