



RADIATED EMISSION

Model Name : LDA150W-3

Model No. :

Serial No. :

Points : 1

Detector : PEAK/QP

Polarization : Vertical

Limit: [CISPR 22] Class B<3m>

Power Supply : 230V(1 Phase) 50Hz


Temp. : 25degC

Humi. : 44%

Date : 2003/4/9 8:52

Test Equip. : R3132,ESPC

Comment :

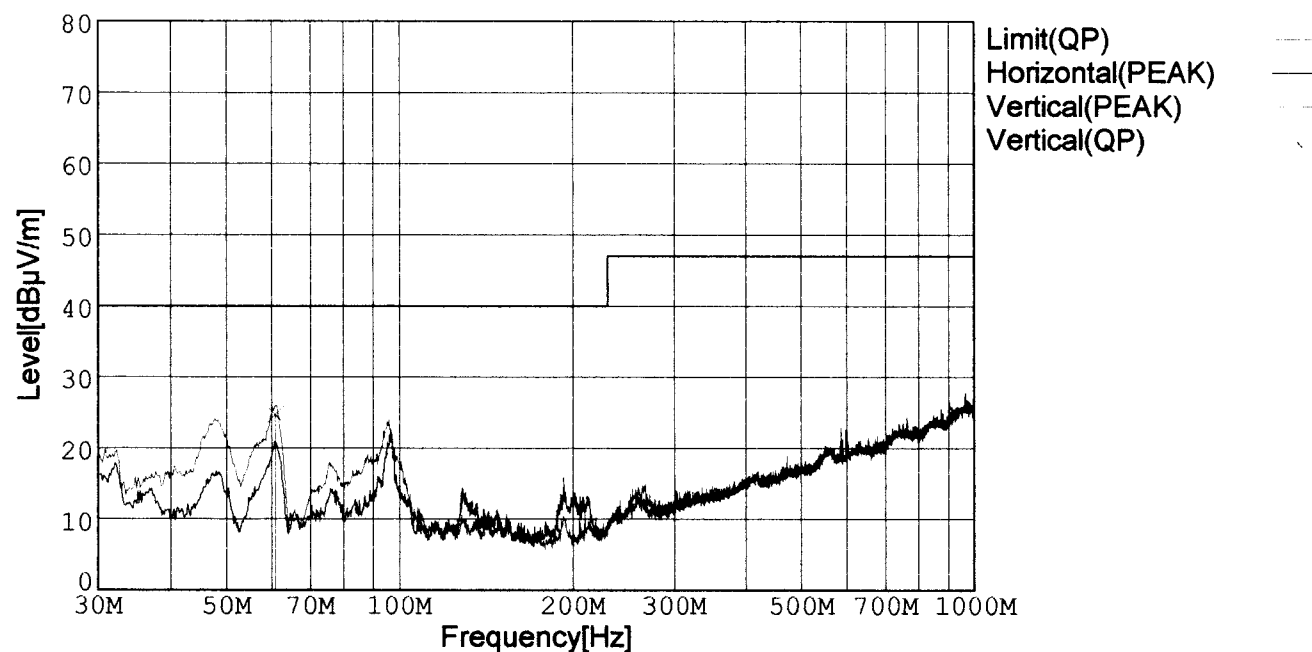

Frequency [MHz]	Meter Reading (QP) [dBμV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level (QP) [dBμV/m]	Angle[°]	Height [cm]	Polar.	Limit [dBμV/m]	Margin [dB]
60.845	52.0	BL	4.7	-32.0	24.7	246	114	Vert.	40.0	15.3

BL: Biconi-Log



LINE CONDUCTION

Model Name : LDA150W-3

Model No. :

Serial No. :

Points : 3

Detector : PEAK/QP/Ave.

Line Mode : VA/VB

Limit1: [CISPR Pub22] Class B(QP)

Limit2: [CISPR Pub22] Class B(Ave.)

Power Supply : 230V(1 Phase) 50Hz


Temp. : 25degC

Humi. : 44%

Date : 2003/4/9 7:45

Test Equip. : R3132,ESPC

Comment :

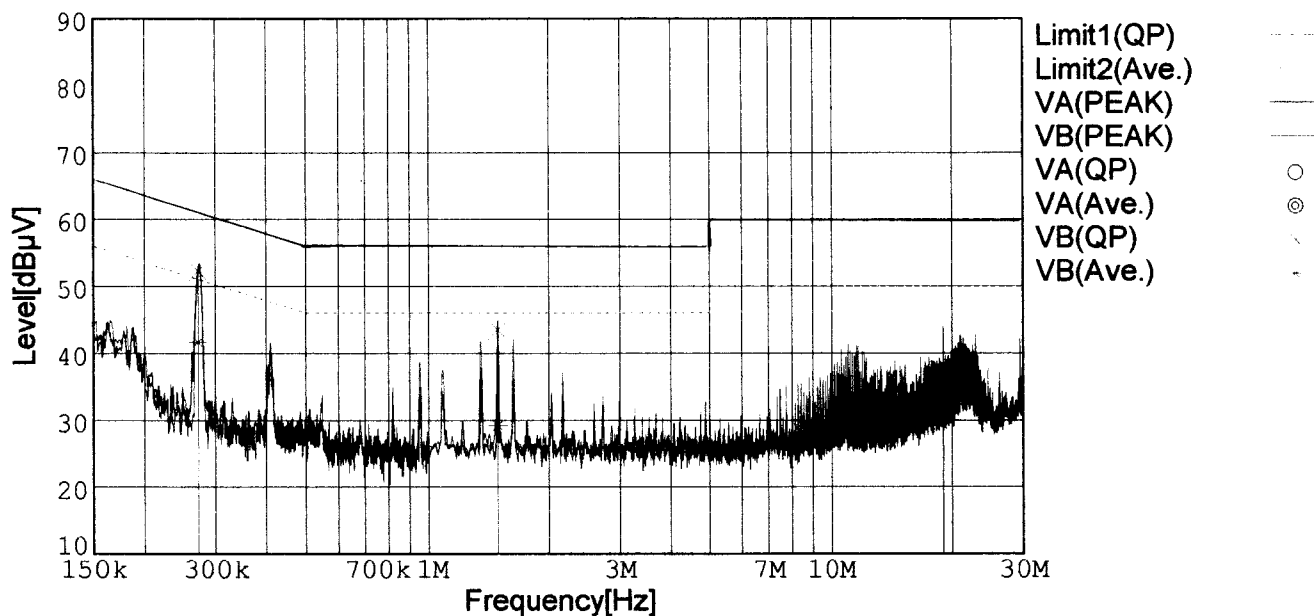

Frequency [MHz]	Meter Reading (QP) [dBμV]	Meter Reading (Ave.) [dBμV]	Factor [dB]	Level (QP) [dBμV]	Level (Ave.) [dBμV]	Line	Limit (QP) [dBμV]	Limit (Ave.) [dBμV]	Margin (QP)[dB]	Margin (Ave.) [dB]
19.0010	26.7	24.1	10.3	37.0	34.4	VA	60.0	50.0	23.0	15.6
0.2714	42.5	31.9	9.8	52.3	41.7	VB	61.1	51.1	8.8	9.4
1.4931	33.6	19.3	9.9	43.5	29.2	VB	56.0	46.0	12.5	16.8