



TEST DATA OF LDA150W-5 (100V INPUT)

Regulated DC Power Supply

Dec. 1, 1999

Approved by : H. Yamaguchi
Design Manager

Prepared by : T. Ashihara
Design Engineer

コーセル株式会社
COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Input Current (by Load Current)	2
入力電流 (負荷特性)	
3. Input Power (by Load Current)	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage)	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current)	5
効率 (負荷特性)	
6. Hold-Up Time	6
出力保持時間	
7. Instantaneous Interruption Compensation	7
瞬時停電保障	
8. Load Regulation	8
静的負荷変動	
9. Ripple Voltage (by Load Current)	9
リップル電圧 (負荷特性)	
10. Ripple-Noise	10
リップルノイズ	
11. Overcurrent Protection	11
過電流保護	
12. Overvoltage Protection	12
過電圧保護	
13. Inrush Current	13
突入電流	
14. Dynamic Load Responce	14
動的負荷変動	
15. Rise and Fall Time	15
立上り、立下り時間	
16. Ambient Temperature Drift	16
周囲温度変動	
17. Minimum Input Voltage for Regulated Output Voltage	17
最低レギュレーション電圧	
18. Ripple Voltage (by Ambient Temperature)	18
リップル電圧 (周囲温度特性)	
19. Time Lapse Drift	19
経時ドリフト	
20. Output Voltage Accuracy	20
定電圧精度	
21. Condensation	21
結露特性	
22. Leakage Current	22
漏洩電流	
23. Line Noise Tolerance	23
入力雑音耐量	
24. Conducted Emission	24
雑音端子電圧	
25. Figure of Testing Circuitry	25
測定回路図	

(Final Page 26)

COSEL

Model		LDA150W-5		Temperature		25℃																																	
Item		Line Regulation 静的入力変動		Testing Circuitry		Figure A																																	
Object		+5.0V30A																																					
1. Graph				2. Values																																			
<div><div><div>□</div><div>Load 50%</div></div><div><div>△</div><div>Load 100%</div></div></div> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>				<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Output Voltage [V]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>75</td><td>5.145</td><td>5.143</td></tr><tr><td>80</td><td>5.145</td><td>5.143</td></tr><tr><td>85</td><td>5.145</td><td>5.143</td></tr><tr><td>90</td><td>5.145</td><td>5.143</td></tr><tr><td>100</td><td>5.145</td><td>5.143</td></tr><tr><td>110</td><td>5.145</td><td>5.143</td></tr><tr><td>120</td><td>5.145</td><td>5.143</td></tr><tr><td>132</td><td>5.146</td><td>5.143</td></tr><tr><td>140</td><td>5.145</td><td>5.143</td></tr></table>				Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	75	5.145	5.143	80	5.145	5.143	85	5.145	5.143	90	5.145	5.143	100	5.145	5.143	110	5.145	5.143	120	5.145	5.143	132	5.146	5.143	140	5.145	5.143
Input Voltage [V]	Output Voltage [V]																																						
	Load 50%	Load 100%																																					
75	5.145	5.143																																					
80	5.145	5.143																																					
85	5.145	5.143																																					
90	5.145	5.143																																					
100	5.145	5.143																																					
110	5.145	5.143																																					
120	5.145	5.143																																					
132	5.146	5.143																																					
140	5.145	5.143																																					

COSEL

Model		LDA150W-5		Temperature		25°C																																																								
Item		Input Current (by Load Current) 入力電流 (負荷特性)		Testing Circuitry		Figure A																																																								
Output		_____																																																												
1. Graph				2. Values																																																										
<div><div><div>—△—</div><div>Input Volt. 85V</div></div><div><div>- - -□- - -</div><div>Input Volt. 100V</div></div><div><div>- - -○- - -</div><div>Input Volt. 132V</div></div></div> <div><div><div>[A]</div><div>5</div><div>4</div><div>3</div><div>2</div><div>1</div><div>0</div></div><div><div><div>0</div><div>10</div><div>20</div><div>30</div><div>40</div></div><div><div>Load Current</div><div>[A]</div></div></div></div> <div><div>Note: Slanted line shows the range of the rated load current</div><div>(注) 斜線は定格負荷電流範囲を示す。</div></div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Current [A]</th></tr><tr><th>Input Volt. 85 [V]</th><th>Input Volt. 100 [V]</th><th>Input Volt. 132 [V]</th></tr><tr><td>0</td><td>0.171</td><td>0.165</td><td>0.182</td></tr><tr><td>6</td><td>0.957</td><td>0.873</td><td>0.757</td></tr><tr><td>12</td><td>1.636</td><td>1.467</td><td>1.232</td></tr><tr><td>18</td><td>2.336</td><td>2.075</td><td>1.717</td></tr><tr><td>24</td><td>3.050</td><td>2.693</td><td>2.212</td></tr><tr><td>30</td><td>3.769</td><td>3.305</td><td>2.699</td></tr><tr><td>33</td><td>4.150</td><td>3.624</td><td>2.953</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Input Current [A]			Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]	0	0.171	0.165	0.182	6	0.957	0.873	0.757	12	1.636	1.467	1.232	18	2.336	2.075	1.717	24	3.050	2.693	2.212	30	3.769	3.305	2.699	33	4.150	3.624	2.953	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Current [A]																																																													
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]																																																											
0	0.171	0.165	0.182																																																											
6	0.957	0.873	0.757																																																											
12	1.636	1.467	1.232																																																											
18	2.336	2.075	1.717																																																											
24	3.050	2.693	2.212																																																											
30	3.769	3.305	2.699																																																											
33	4.150	3.624	2.953																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											

COSEL

Model		LDA150W-5		Temperature		25°C																																																								
Item		Input Power (by Load Current) 入力電力 (負荷特性)		Testing Circuitry		Figure A																																																								
Output		_____																																																												
1. Graph				2. Values																																																										
<div><div>—△—</div>Input Volt. 85V</div> <div><div>—□—</div>Input Volt. 100V</div> <div><div>—○—</div>Input Volt. 132V</div> <div><div><div>Input Power [W]</div><div>500</div><div>400</div><div>300</div><div>200</div><div>100</div><div>0</div></div><div><div>0</div><div>10</div><div>20</div><div>30</div><div>40</div></div><div><div>Load Current [A]</div></div></div> <div>Note: Slanted line shows the range of the rated load current</div> <div>(注)斜線は定格負荷電流範囲を示す。</div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Power [W]</th></tr><tr><th>Input Volt. 85 [V]</th><th>Input Volt. 100 [V]</th><th>Input Volt. 132 [V]</th></tr><tr><td>0</td><td>3.50</td><td>4.26</td><td>6.20</td></tr><tr><td>6</td><td>40.93</td><td>41.70</td><td>44.20</td></tr><tr><td>12</td><td>77.70</td><td>78.02</td><td>79.90</td></tr><tr><td>18</td><td>115.90</td><td>115.60</td><td>116.70</td></tr><tr><td>24</td><td>156.00</td><td>154.80</td><td>154.80</td></tr><tr><td>30</td><td>197.30</td><td>194.80</td><td>193.50</td></tr><tr><td>33</td><td>219.20</td><td>215.80</td><td>213.70</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Input Power [W]			Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]	0	3.50	4.26	6.20	6	40.93	41.70	44.20	12	77.70	78.02	79.90	18	115.90	115.60	116.70	24	156.00	154.80	154.80	30	197.30	194.80	193.50	33	219.20	215.80	213.70	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Power [W]																																																													
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]																																																											
0	3.50	4.26	6.20																																																											
6	40.93	41.70	44.20																																																											
12	77.70	78.02	79.90																																																											
18	115.90	115.60	116.70																																																											
24	156.00	154.80	154.80																																																											
30	197.30	194.80	193.50																																																											
33	219.20	215.80	213.70																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											

COSEL

Model		LDA150W-5	
Item	Efficiency (by Input Voltage) 効率（入力電圧特性）		Temperature 25℃ Testing Circuitry Figure A
Object			
1. Graph		2. Values	

□ Load 50%

△ Load 100%

Input Voltage [V]	Load 50% Efficiency [%]	Load 100% Efficiency [%]
75	80.5	77.2
80	80.5	78.3
85	80.6	78.8
90	80.5	79.2
100	80.4	79.9
110	80.1	80.2
120	79.7	80.4
132	79.1	80.5
140	78.6	80.4

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

COSEL

Model		LDA150W-5		Temperature		25℃	
Item		Efficiency (by Load Current) 効率 (負荷特性)		Testing Circuitry		Figure A	
Output		_____					

1. Graph

—△—

Input Volt. 85V

- -□- -

Input Volt. 100V

- -○- -

Input Volt. 132V

Efficiency [%]

Load Current [A]	85V [%]	100V [%]	132V [%]
6	75.4	74.5	70.1
12	79.8	79.4	77.7
18	80.2	80.5	79.8
24	79.6	80.3	80.3
30	78.6	79.7	80.3
33	78.0	79.2	80.0
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

Load Current [A]

010203040

Note: Slanted line shows the range of the rated load current

(注) 斜線は定格負荷電流範囲を示す。

2. Values

Load Current [A]	Efficiency [%]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
6	75.4	74.5	70.1
12	79.8	79.4	77.7
18	80.2	80.5	79.8
24	79.6	80.3	80.3
30	78.6	79.7	80.3
33	78.0	79.2	80.0
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

COSEL

Model		LDA150W-5	Temperature Testing Circuitry	25℃ Figure A																																
Item		Hold-Up Time 出力保持時間																																		
Object		+5.0V30A																																		
1. Graph			2. Values																																	
<div><div>□ Load 50%</div><div>—△— Load 100%</div></div> <div><p>[mS]</p><p>Hold-Up Time</p><p>Input Voltage [V]</p></div> <div><p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p><p>Note: Slanted line shows the range of the rated input voltage.</p><p>出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。</p><p>(注)斜線は定格入力電圧範囲を示す。</p></div>			<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Hold-Up Time [mS]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>75</td><td>24</td><td>7</td></tr><tr><td>80</td><td>30</td><td>10</td></tr><tr><td>85</td><td>38</td><td>14</td></tr><tr><td>90</td><td>45</td><td>18</td></tr><tr><td>100</td><td>62</td><td>27</td></tr><tr><td>110</td><td>80</td><td>36</td></tr><tr><td>120</td><td>101</td><td>46</td></tr><tr><td>132</td><td>127</td><td>60</td></tr><tr><td>140</td><td>136</td><td>70</td></tr></table>		Input Voltage [V]	Hold-Up Time [mS]		Load 50%	Load 100%	75	24	7	80	30	10	85	38	14	90	45	18	100	62	27	110	80	36	120	101	46	132	127	60	140	136	70
Input Voltage [V]	Hold-Up Time [mS]																																			
	Load 50%	Load 100%																																		
75	24	7																																		
80	30	10																																		
85	38	14																																		
90	45	18																																		
100	62	27																																		
110	80	36																																		
120	101	46																																		
132	127	60																																		
140	136	70																																		

COSEL

Model		LDA150W-5	
Item		Instantaneous Interruption Compensation 瞬時停電保障	
Object		+5.0V30A	

1. Graph

—△—

Input Volt. 85 V

—□—

Input Volt. 100 V

—○—

Input Volt. 132 V

[mS]

1000

100

10

1

Instantaneous Compensation Time

0

10

20

30

40

Load Current

[A]

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note:Slanted line shows the range of the rated load current.

瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。

(注)斜線は定格負荷電流範囲を示す。



2. Values


Load Current [A]	Time [mS]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
0	—	—	—
6	91	137	268
12	34	66	138
18	18	36	94
24	12	26	66
30	6	18	44
33	3	11	28
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

COSEL

Model		LDA150W-5		Temperature		25℃																																																
Item		Load Regulation 静的負荷変動		Testing Circuitry		Figure A																																																
Object		+5.0V30A																																																				
1. Graph				2. Values																																																		
<div><div><div>△</div><div>□</div><div>○</div></div><div>Input Volt. 85 V</div><div>Input Volt. 100 V</div><div>Input Volt. 132 V</div></div> <div><div><div>Output Voltage</div><div>[V]</div></div><div><div><div>5.290</div><div>5.250</div><div>5.210</div><div>5.170</div><div>5.130</div><div>5.090</div><div>5.050</div><div>0</div></div><div><div>0</div><div>10</div><div>20</div><div>30</div><div>40</div></div><div><div>Load Current</div><div>[A]</div></div></div><div><div><div>5.148</div><div>5.147</div><div>5.146</div><div>5.145</div><div>5.144</div><div>5.143</div><div>5.143</div><div>—</div><div>—</div><div>—</div></div><div><div>0</div><div>6</div><div>12</div><div>18</div><div>24</div><div>30</div><div>33</div><div>—</div><div>—</div><div>—</div></div><div><div>5.148</div><div>5.147</div><div>5.146</div><div>5.145</div><div>5.144</div><div>5.143</div><div>5.143</div><div>—</div><div>—</div><div>—</div></div></div></div> <div><div>Note: Slanted line shows the range of the rated load current.</div><div>(注)斜線は定格負荷電流範囲を示す。</div></div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>0</td><td>5.148</td><td>5.148</td><td>5.148</td></tr><tr><td>6</td><td>5.147</td><td>5.147</td><td>5.147</td></tr><tr><td>12</td><td>5.146</td><td>5.146</td><td>5.146</td></tr><tr><td>18</td><td>5.145</td><td>5.145</td><td>5.145</td></tr><tr><td>24</td><td>5.144</td><td>5.144</td><td>5.144</td></tr><tr><td>30</td><td>5.143</td><td>5.143</td><td>5.143</td></tr><tr><td>33</td><td>5.143</td><td>5.143</td><td>5.143</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Output Voltage [V]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0	5.148	5.148	5.148	6	5.147	5.147	5.147	12	5.146	5.146	5.146	18	5.145	5.145	5.145	24	5.144	5.144	5.144	30	5.143	5.143	5.143	33	5.143	5.143	5.143	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																			
0	5.148	5.148	5.148																																																			
6	5.147	5.147	5.147																																																			
12	5.146	5.146	5.146																																																			
18	5.145	5.145	5.145																																																			
24	5.144	5.144	5.144																																																			
30	5.143	5.143	5.143																																																			
33	5.143	5.143	5.143																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			

COSEL

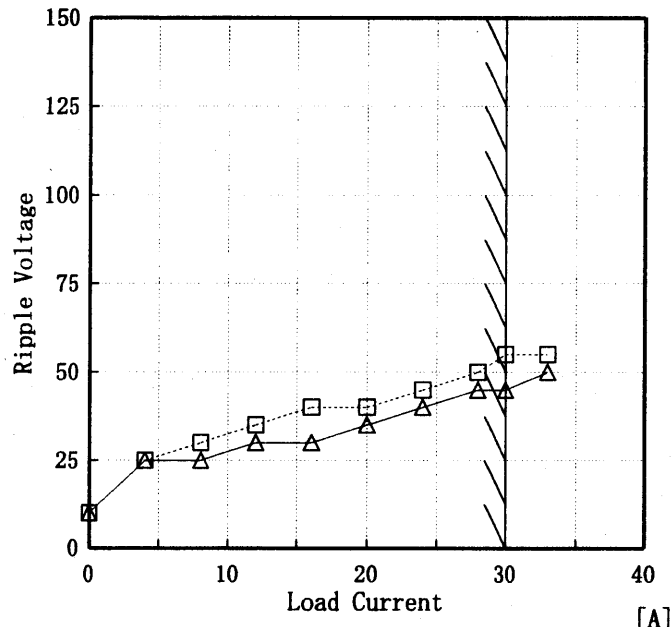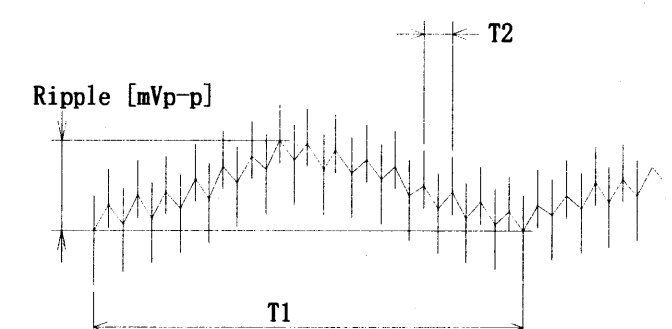Model		LDA150W-5		Temperature Testing Circuitry	25℃ Figure A																																						
Item		Ripple Voltage (by Load Current) リップル電圧 (負荷電流特性)																																									
Object		+5.0V30A																																									
1. Graph				2. Values																																							
<div><div><div>□</div><div>Input Volt. 85V</div></div><div><div>△</div><div>Input Volt. 132V</div></div></div>  <p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p - p 値で示される。 (注)斜線は定格負荷電流範囲を示す。</p>				<table><tr><th rowspan="2">Load Current [A]</th><th>Input Volt. 85 [V]</th><th>Input Volt. 132 [V]</th></tr><tr><th>Ripple Output Volt. [mV]</th><th>Ripple Output Volt. [mV]</th></tr><tr><td>0.00</td><td>10</td><td>10</td></tr><tr><td>4.00</td><td>25</td><td>25</td></tr><tr><td>8.00</td><td>30</td><td>25</td></tr><tr><td>12.00</td><td>35</td><td>30</td></tr><tr><td>16.00</td><td>40</td><td>30</td></tr><tr><td>20.00</td><td>40</td><td>35</td></tr><tr><td>24.00</td><td>45</td><td>40</td></tr><tr><td>28.00</td><td>50</td><td>45</td></tr><tr><td>30.00</td><td>55</td><td>45</td></tr><tr><td>33.00</td><td>55</td><td>50</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>		Load Current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.00	10	10	4.00	25	25	8.00	30	25	12.00	35	30	16.00	40	30	20.00	40	35	24.00	45	40	28.00	50	45	30.00	55	45	33.00	55	50	—	—	—
Load Current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]																																									
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																									
0.00	10	10																																									
4.00	25	25																																									
8.00	30	25																																									
12.00	35	30																																									
16.00	40	30																																									
20.00	40	35																																									
24.00	45	40																																									
28.00	50	45																																									
30.00	55	45																																									
33.00	55	50																																									
—	—	—																																									
<p>T1: Due to AC Input Line 入力商用周期</p> <p>T2: Due to Switching スイッチング周期</p>  <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																											

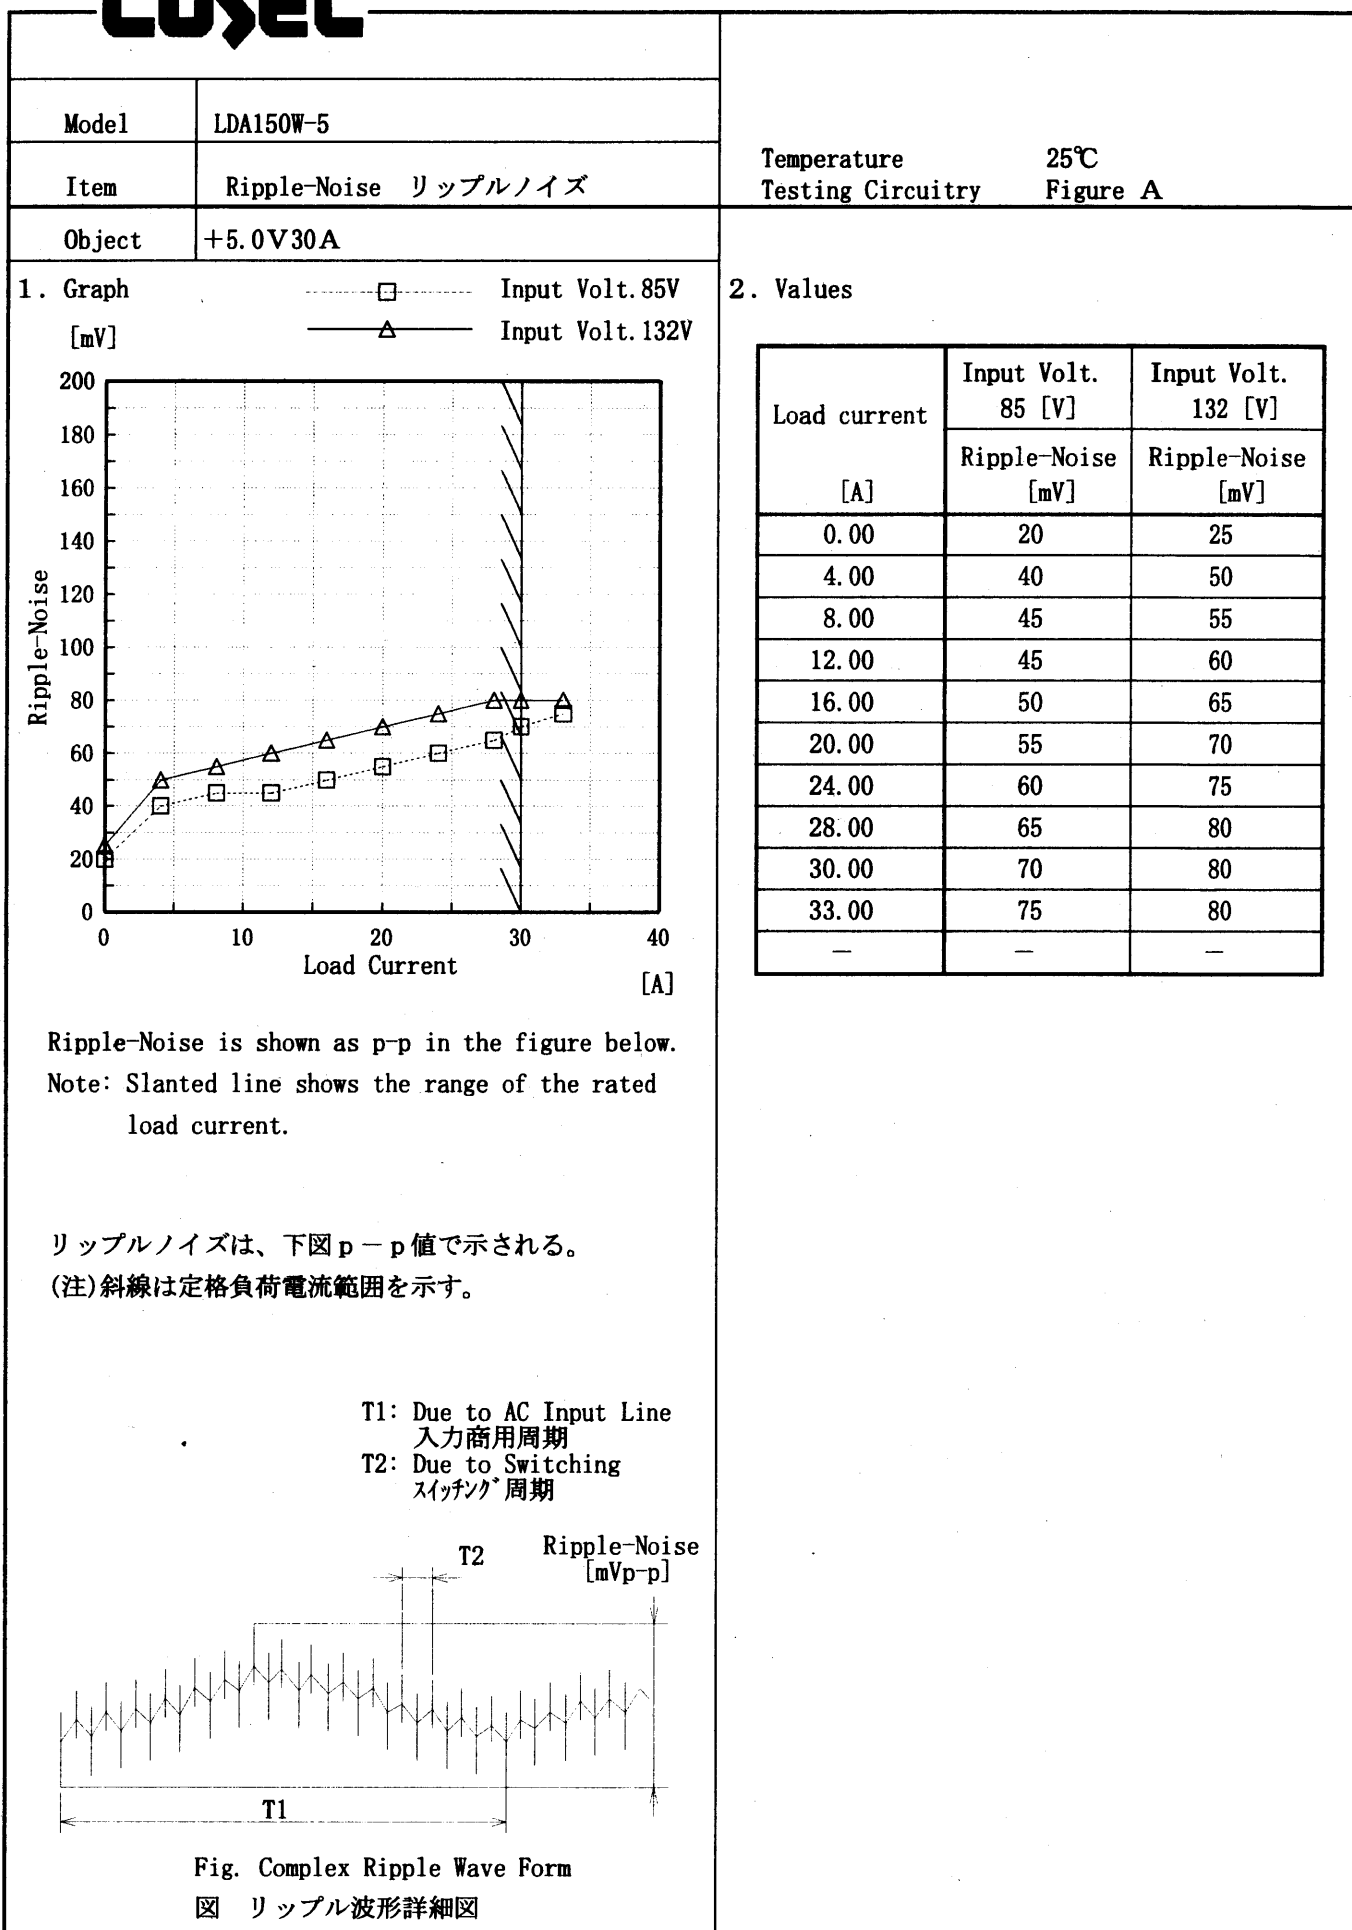COSEL


COSEL

Model		LDA150W-5		Temperature		25℃																																																								
Item		Overcurrent Protection 過電流保護		Testing Circuitry		Figure A																																																								
Object		+5.0V30A																																																												
1. Graph				2. Values																																																										
<div><div>Input Volt. 85 V</div><div>Input Volt. 100 V</div><div>Input Volt. 132 V</div></div> <div><div>Output Voltage [V]</div><div><div></div><div></div><div></div></div><div><div>8.0</div><div>6.0</div><div>4.0</div><div>2.0</div><div>0.0</div></div><div><div>0</div><div>10</div><div>20</div><div>30</div><div>40</div><div>50</div></div><div><div>Load Current [A]</div></div></div> <div><div>Note: Slanted line shows the range of the rated load current.</div><div><div>(注)斜線は定格負荷電流範囲を示す。</div></div></div>				<table><tr><th rowspan="2">Output Voltage [V]</th><th colspan="3">Load Current [A]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>5.00</td><td>37.98</td><td>37.65</td><td>37.70</td></tr><tr><td>4.75</td><td>38.07</td><td>37.83</td><td>37.88</td></tr><tr><td>4.50</td><td>38.17</td><td>37.98</td><td>38.03</td></tr><tr><td>4.00</td><td>38.42</td><td>38.32</td><td>38.37</td></tr><tr><td>3.50</td><td>38.75</td><td>38.62</td><td>38.65</td></tr><tr><td>3.00</td><td>39.02</td><td>39.01</td><td>38.93</td></tr><tr><td>2.50</td><td>39.24</td><td>39.18</td><td>39.28</td></tr><tr><td>2.00</td><td>39.50</td><td>39.48</td><td>39.62</td></tr><tr><td>1.50</td><td>39.84</td><td>39.77</td><td>39.94</td></tr><tr><td>1.00</td><td>40.12</td><td>40.05</td><td>40.12</td></tr><tr><td>0.50</td><td>40.07</td><td>39.80</td><td>39.17</td></tr><tr><td>0.00</td><td>38.85</td><td>38.49</td><td>37.72</td></tr></table>				Output Voltage [V]	Load Current [A]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	5.00	37.98	37.65	37.70	4.75	38.07	37.83	37.88	4.50	38.17	37.98	38.03	4.00	38.42	38.32	38.37	3.50	38.75	38.62	38.65	3.00	39.02	39.01	38.93	2.50	39.24	39.18	39.28	2.00	39.50	39.48	39.62	1.50	39.84	39.77	39.94	1.00	40.12	40.05	40.12	0.50	40.07	39.80	39.17	0.00	38.85	38.49	37.72
Output Voltage [V]	Load Current [A]																																																													
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																											
5.00	37.98	37.65	37.70																																																											
4.75	38.07	37.83	37.88																																																											
4.50	38.17	37.98	38.03																																																											
4.00	38.42	38.32	38.37																																																											
3.50	38.75	38.62	38.65																																																											
3.00	39.02	39.01	38.93																																																											
2.50	39.24	39.18	39.28																																																											
2.00	39.50	39.48	39.62																																																											
1.50	39.84	39.77	39.94																																																											
1.00	40.12	40.05	40.12																																																											
0.50	40.07	39.80	39.17																																																											
0.00	38.85	38.49	37.72																																																											

BC-4098


COSEL

Model	LDA150W-5	Temperature	25°C
Item	Inrush Current 突入電流	Testing Circuitry	Figure A
Object			

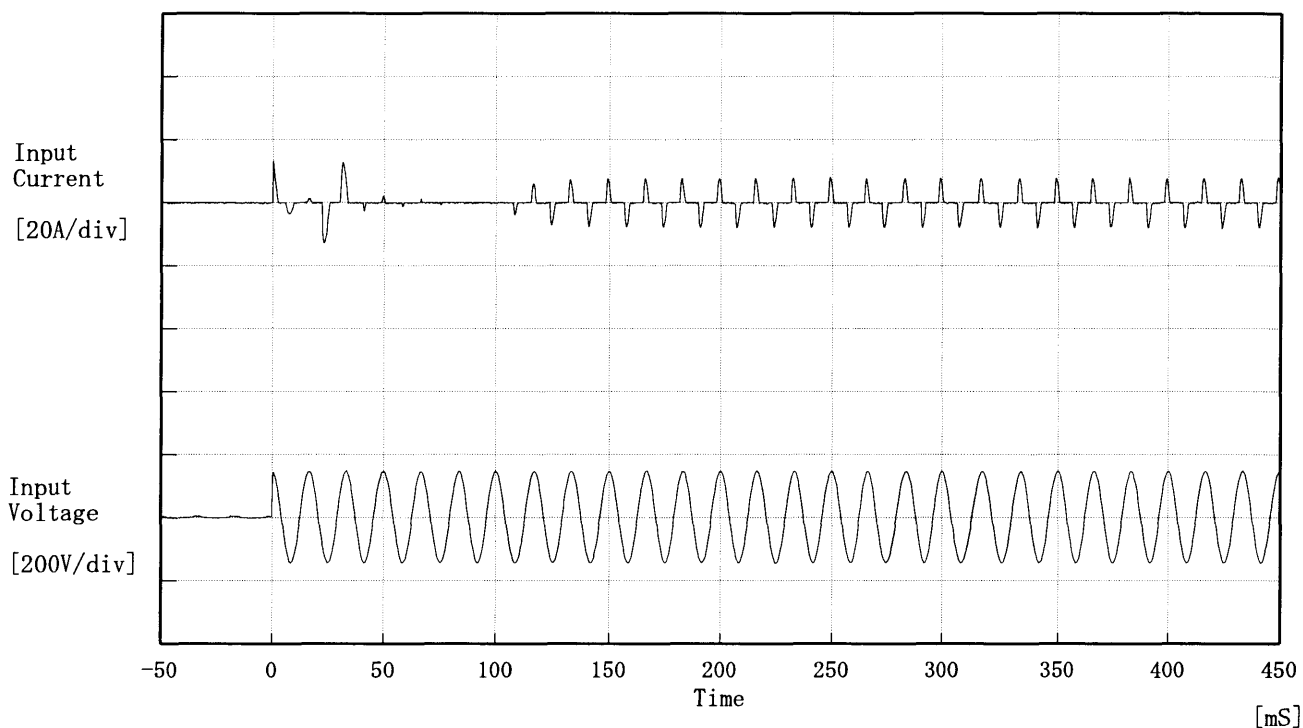

Input Voltage 100 V
 Frequency 60 Hz
 Load 100 %
 Inrush Current

- ① 13.22 [A]
- ② 8.38 [A]

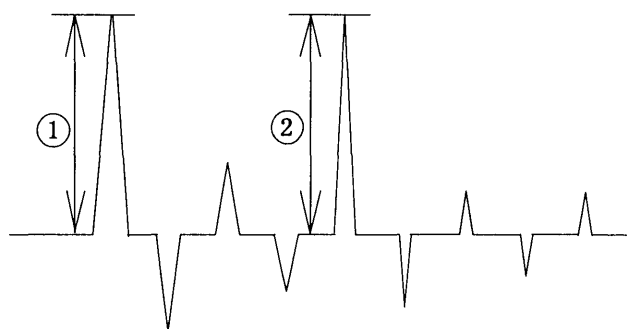

COSEL

Model	LDA150W-5	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Responce 動的負荷変動	
Object	+5.0V30A	



Input Volt. 100 V

Cycle 1000 mS

Load Current



Load 0% ↔

Load 100 %

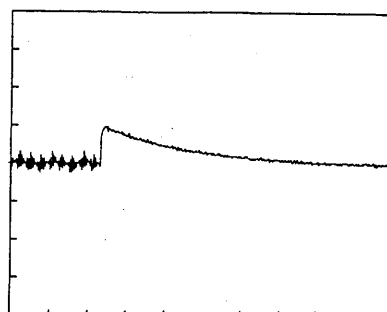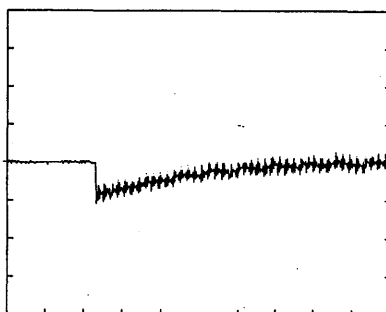

Load 0% ↔

Load 50 %

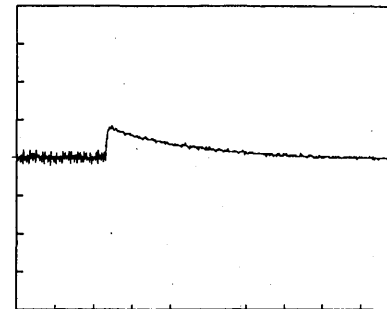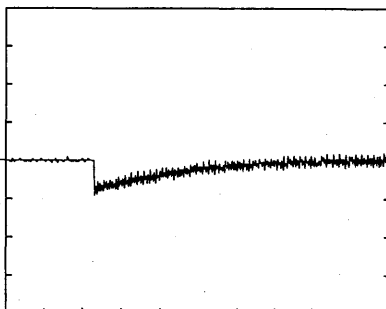

100 mV/div


10 mS/div

COSEL

Model	LDA150W-5	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+5.0V30A		

1. Graph


Input Volt. 85 V

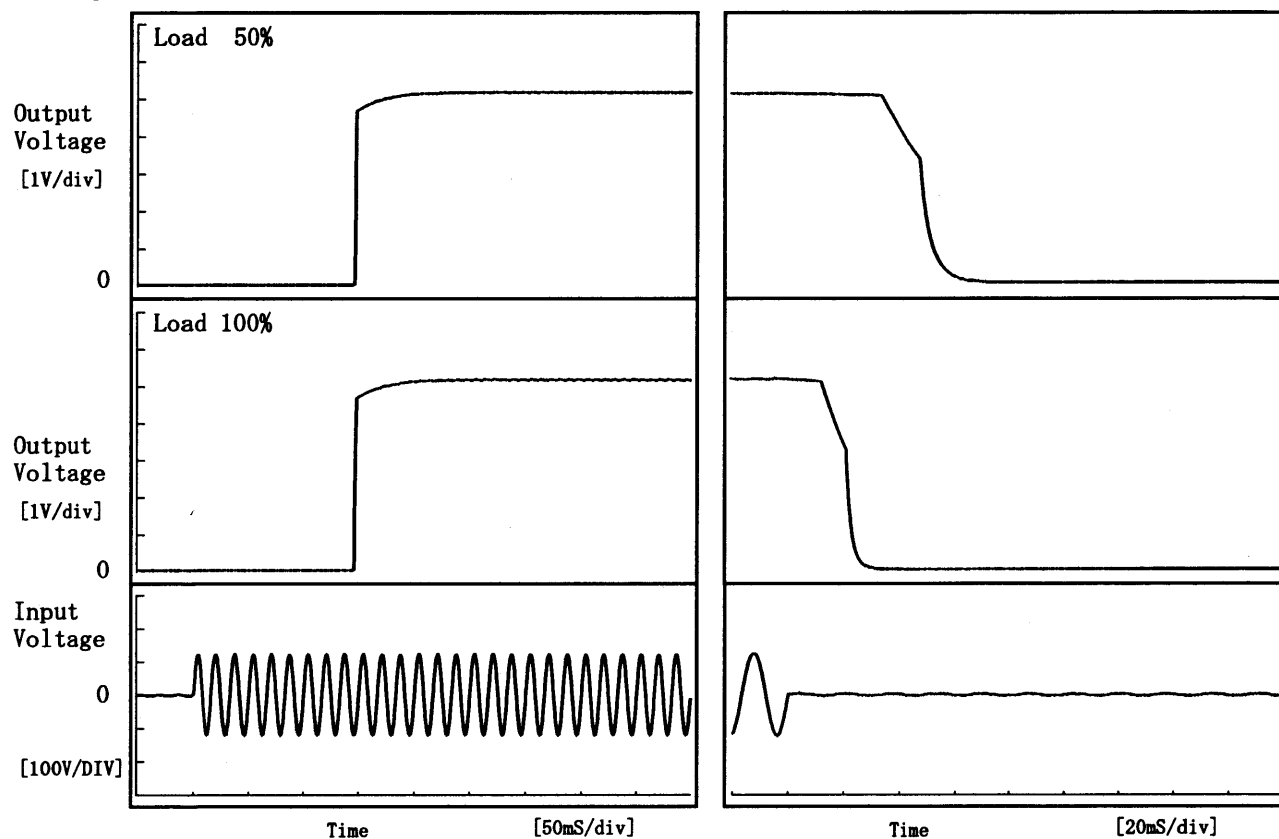

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	145.8	1.5	147.3	37.8	18.2
100 %	145.8	2.0	147.8	14.4	10.7

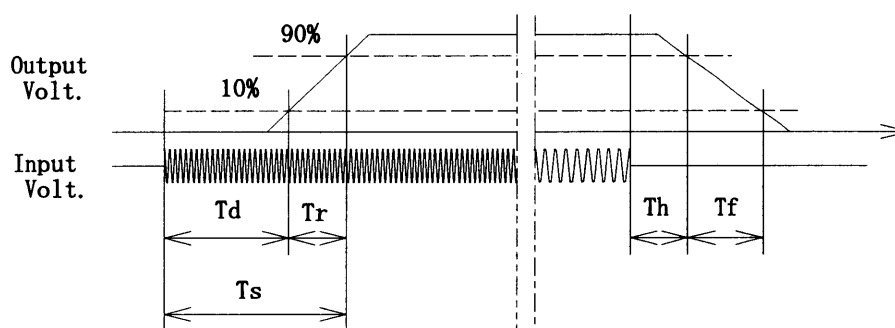

COSEL

Model		LDA150W-5	Testing Circuitry Figure A																																																				
Item		Ambient Temperature Drift 周囲温度変動																																																					
Object		+5.0V30A																																																					
1. Graph		<div><div>△</div>Input Volt. 85V</div> <div><div>□</div>Input Volt. 100V</div> <div><div>○</div>Input Volt. 132V</div> <p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p>	2. Values																																																				
			<table><tr><th rowspan="2">Ambient Temperature [°C]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>-20</td><td>5.139</td><td>5.140</td><td>5.140</td></tr><tr><td>-10</td><td>5.140</td><td>5.140</td><td>5.140</td></tr><tr><td>0</td><td>5.139</td><td>5.139</td><td>5.139</td></tr><tr><td>10</td><td>5.139</td><td>5.139</td><td>5.139</td></tr><tr><td>20</td><td>5.141</td><td>5.141</td><td>5.142</td></tr><tr><td>25</td><td>5.142</td><td>5.142</td><td>5.143</td></tr><tr><td>30</td><td>5.144</td><td>5.144</td><td>5.145</td></tr><tr><td>40</td><td>5.147</td><td>5.147</td><td>5.147</td></tr><tr><td>50</td><td>5.147</td><td>5.148</td><td>5.148</td></tr><tr><td>60</td><td>5.145</td><td>5.146</td><td>5.146</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>	Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	-20	5.139	5.140	5.140	-10	5.140	5.140	5.140	0	5.139	5.139	5.139	10	5.139	5.139	5.139	20	5.141	5.141	5.142	25	5.142	5.142	5.143	30	5.144	5.144	5.145	40	5.147	5.147	5.147	50	5.147	5.148	5.148	60	5.145	5.146	5.146	—	—	—	—	
Ambient Temperature [°C]	Output Voltage [V]																																																						
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																				
-20	5.139	5.140	5.140																																																				
-10	5.140	5.140	5.140																																																				
0	5.139	5.139	5.139																																																				
10	5.139	5.139	5.139																																																				
20	5.141	5.141	5.142																																																				
25	5.142	5.142	5.143																																																				
30	5.144	5.144	5.145																																																				
40	5.147	5.147	5.147																																																				
50	5.147	5.148	5.148																																																				
60	5.145	5.146	5.146																																																				
—	—	—	—																																																				
Note: Slanted line shows the range of the rated ambient temperature.																																																							
(注)斜線は定格周囲温度範囲を示す。																																																							

Model		LDA150W-5																																						
Item		Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧																																						
Object		+5.0V30A																																						
1. Graph		<div> <div> <div>□</div> <div>Load 50%</div> </div> <div> <div>△</div> <div>Load 100%</div> </div> </div> <p>Input Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注) 斜線は定格周囲温度範囲を示す。</p>																																						
2. Values		<table> <tr> <th rowspan="2">Ambient Temperature [°C]</th><th colspan="2">Input Voltage [V]</th></tr> <tr> <th>Load 50%</th><th>Load 100%</th></tr> <tr><td>-20</td><td>57</td><td>66</td></tr> <tr><td>-10</td><td>57</td><td>66</td></tr> <tr><td>0</td><td>57</td><td>65</td></tr> <tr><td>10</td><td>56</td><td>65</td></tr> <tr><td>20</td><td>56</td><td>65</td></tr> <tr><td>25</td><td>56</td><td>65</td></tr> <tr><td>30</td><td>56</td><td>65</td></tr> <tr><td>40</td><td>56</td><td>65</td></tr> <tr><td>50</td><td>56</td><td>65</td></tr> <tr><td>60</td><td>56</td><td>65</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </table>	Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-20	57	66	-10	57	66	0	57	65	10	56	65	20	56	65	25	56	65	30	56	65	40	56	65	50	56	65	60	56	65	—	—	—
Ambient Temperature [°C]	Input Voltage [V]																																							
	Load 50%	Load 100%																																						
-20	57	66																																						
-10	57	66																																						
0	57	65																																						
10	56	65																																						
20	56	65																																						
25	56	65																																						
30	56	65																																						
40	56	65																																						
50	56	65																																						
60	56	65																																						
—	—	—																																						

Model		LDA150W-5
Item		Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object		+5.0V30A

1. Graph

□ --- Load 50%

—△— Load 100%

[mV]

150

125

100

75

50

25

0

Ripple Voltage

Ambient Temperature

[°C]

Input Volt. 100 V

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values

	Load 50%	Load 100%
Ambient Temp. [°C]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
-20	60	80
-10	50	75
0	45	65
10	40	60
20	40	55
25	35	50
30	35	50
40	35	50
50	30	45
60	30	45
—	—	—

BC-4098

COSEL

Model		LDA150W-5	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+5.0V30A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature -10~50 °C

Input Voltage : 85~132 V

Load Current : 0~30 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

1. 定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 85~132 V

負荷電流 0~30 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

2. Values

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ration) [%]
Maximum Voltage	50	100	0	5.153	±7	±0.2
Minimum Voltage	-10	100	30	5.140		

COSEL

Model	LDA150W-5	Temperature	25℃
Item	Leakage Current 漏洩電流	Testing Circuitry	Figure B
Object	_____		

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	0.17	0.20	0.24
(B) IEC60950	0.17	0.20	0.24

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	—	—	—

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力 of 両相について測定し、その大きい方を漏洩電流測定値とする。

COSEL

Model		LDA150F-5	Temperature 25°C Testing Circuitry Figure C
Item		Line Noise Tolerance 入力雑音耐量	
Object		+5.0V30A	

1. Results

Pulse Width [nS]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

2. Conditions

Input Voltage : 100 V
 Pulse Voltage : 2000 V
 Pulse Cycle : 10 mS
 Pulse Input Duration : 1 min. or more
 Load : 100 %

COSEL

Model	LDA150W-5	Temperature	25°C
Item	Conducted Emission 雑音端子電圧	Testing Circuitry	Figure D
Object			


1. Graph

Remarks


Input Volt. 100 V (VCCI Class B)
120 V (FCC Class B)
Load 100 %

規格 1: [VCCI] Class B(平均値)

規格 2: [VCCI] Class B(QP)

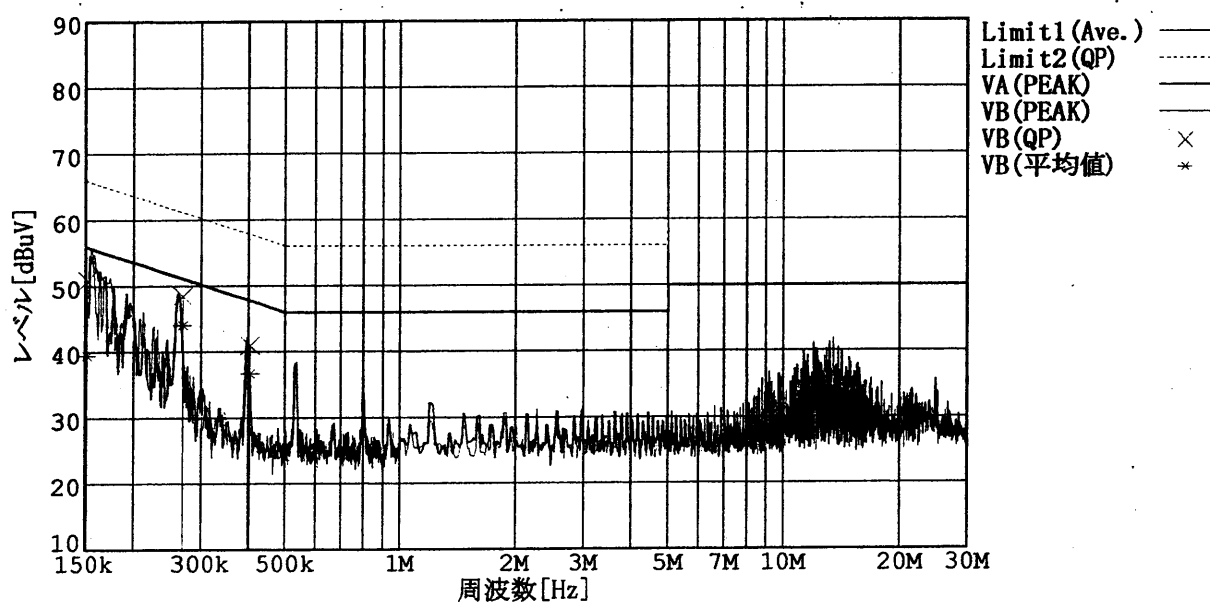

規格 1: [FCC Part15] Class B

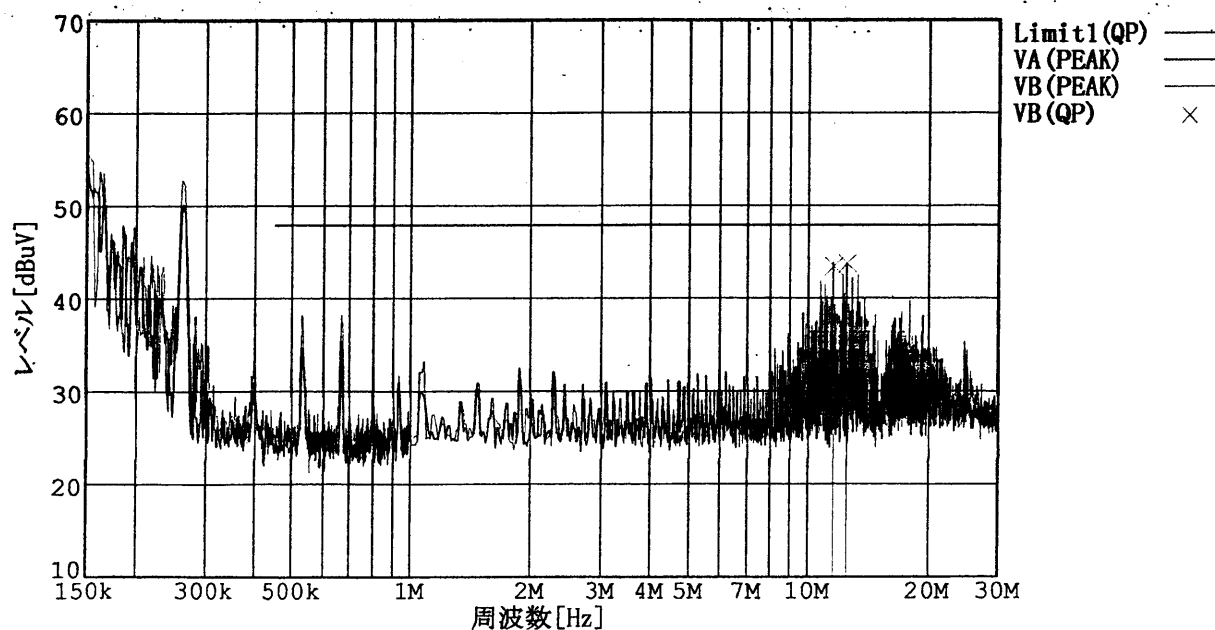

COSEL

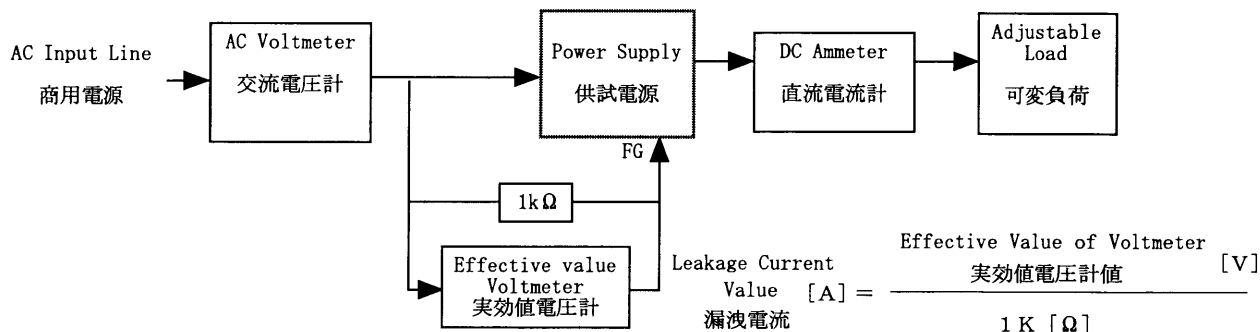
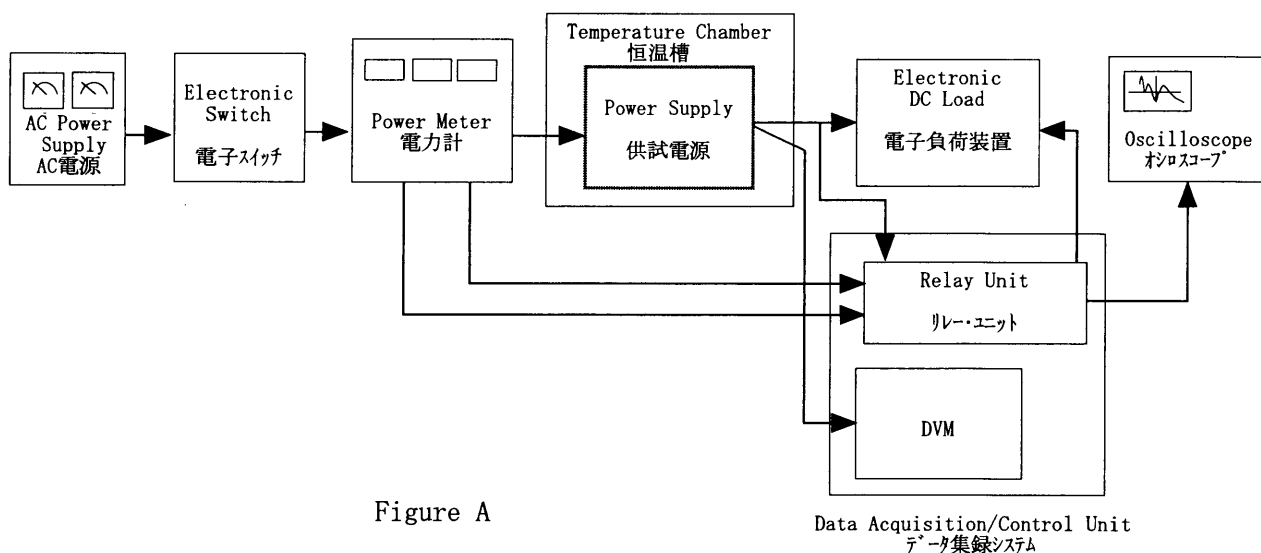


Figure B (DENTORI)

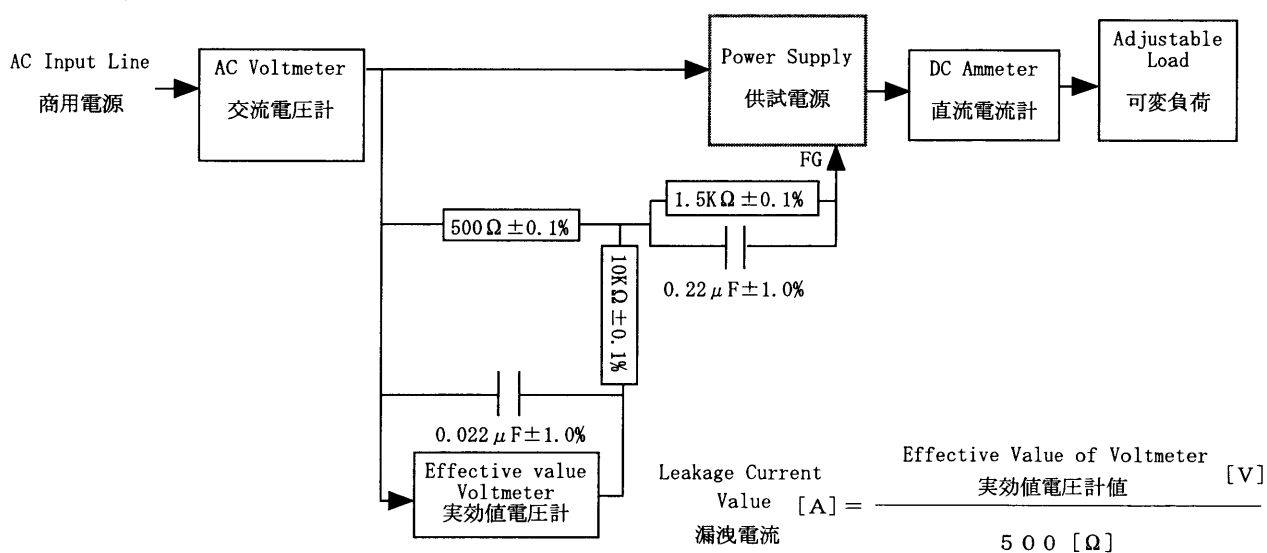


Figure B (IEC 60950)

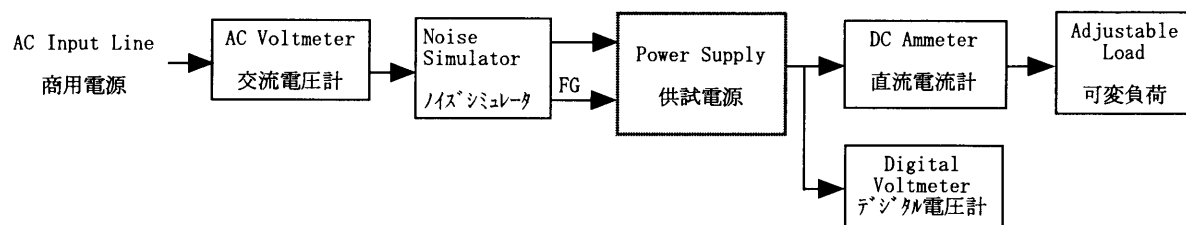


Figure C

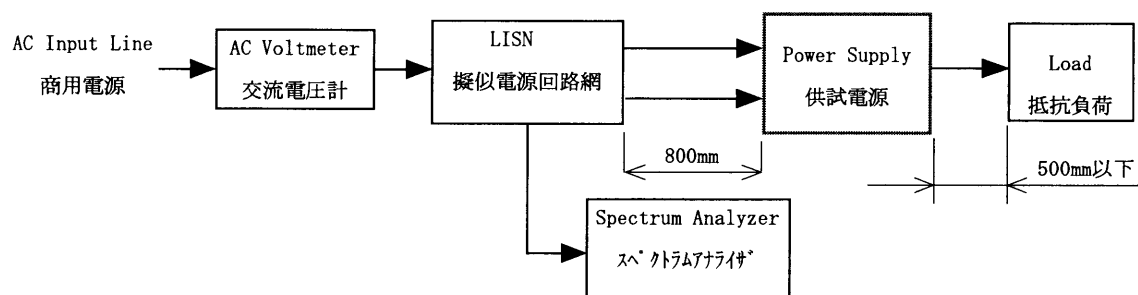


Figure D

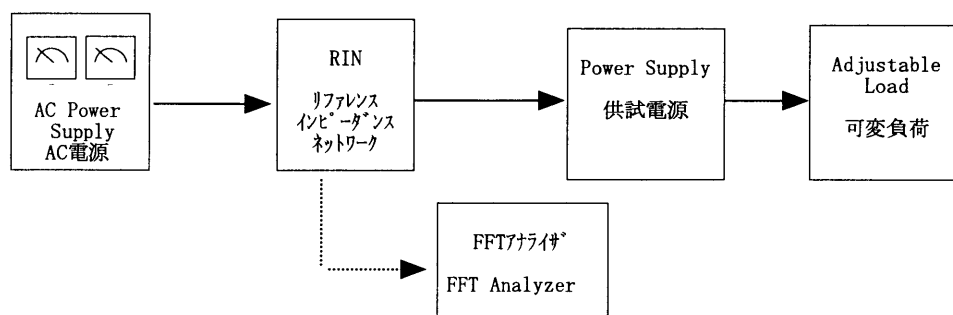


Figure E