


## RADIATED EMISSION

Model Name :LDA150W-9  
 Model No. :  
 Serial No. :  
 Points :3  
 Detector :PEAK/QP  
 Polarization :Hori.&Vert.  
 Limit:[CISPR 22] Class B<3m>

Power Supply :230V(1 Phase) 50Hz  
 Temp. :25degC  
 Humi. :44%  
 Date :2001/9/18  
 Test Equip. :R3132,ESPC  
 Comment :

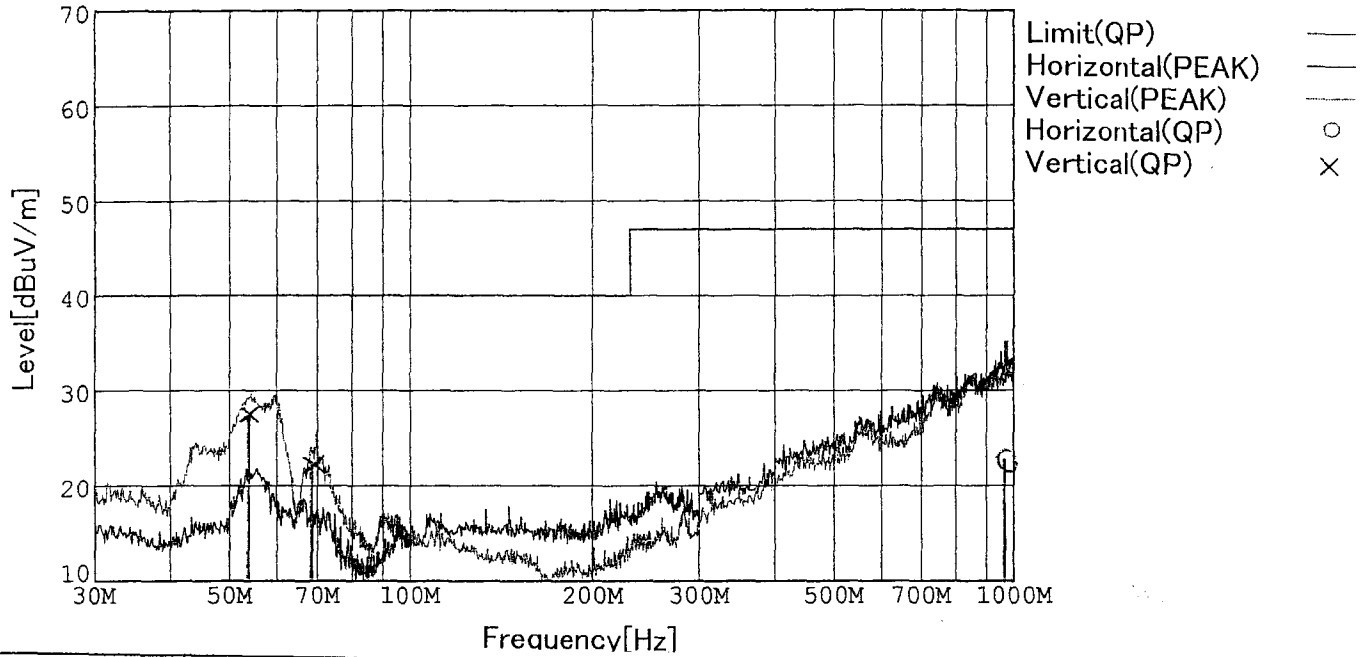

Frequency [MHz]	Meter Reading (QP) [ $\text{dBuV}$ ]	Antena Factor [ $\text{dBuV}$ ]	Cable & Preamp [dB]	Level (Qp) [ $\text{dBuV}$ ]	Angle [°]	Height [cm]	Polar.	Limit [ $\text{dBuV/m}$ ]	Margin [dB]
976.289	21.6	25.0	-23.8	22.8	238	116	Hori.	47.0	24.2
53.727	45.4	5.7	-23.2	27.9	352	123	Vert.	40.0	12.1
69.407	41.0	5.1	-23.5	22.6	358	117	Vert.	40.0	17.4



# LINE CONDUCTION

Model Name :LDA150W-9

Model No. :

Serial No. :

Points :3

Detector :PEAK/QP/Ave.

Line Mode :VA/VB

Limit1:[CISPR Pub22] Class B(QP)

Limit2:[CISPR Pub22] Class B(Ave.)

Power Supply :230V(1 Phase) 50Hz


Temp. :25degC

Humi. :44%

Date :2001/9/18

Test Equip. :R3132,ESPC

Comment :

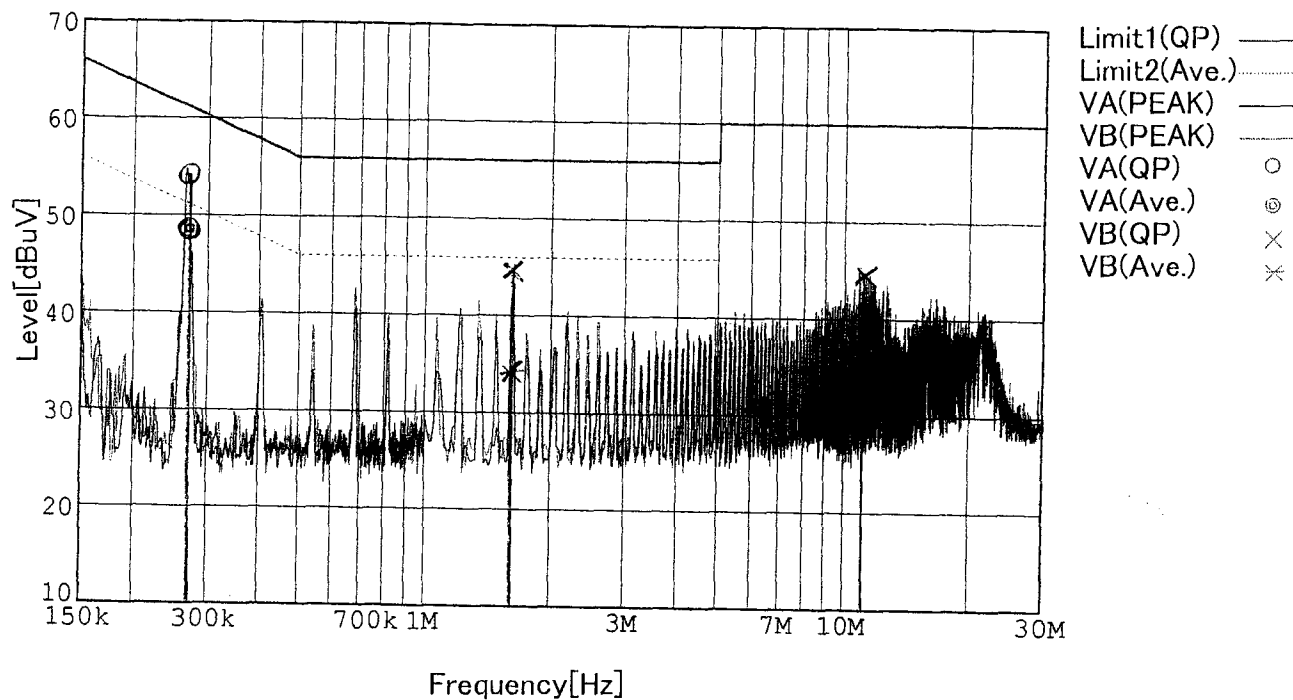

Frequency [MHz]	Meter Reading (QP) [dBuV]	Meter Reading (Ave.) [dBuV]	Factor [dB]	Level (QP) [dBuV]	Level (Ave.) [dBuV]	Line	Limit (QP) [dBuV]	Limit (Ave.) [dBuV]	Margin (QP) [dB]	Margin (Ave.) [dB]
0.2735	44.5	38.5	10.0	54.5	48.5	VA	61.0	51.0	6.5	2.5
1.6446	34.1	24.3	10.1	44.2	34.4	VB	56.0	46.0	11.8	11.6
10.8300	33.6	19.7	10.5	44.1	30.2	VB	60.0	50.0	15.9	19.8