

COSEL

TEST DATA OF LDA15F-24
(200V INPUT)

Regulated DC Power Supply

Date : June 23. 1999

Approved by : M. Yamaguchi
Design Manager

Prepared by : J. Ashihara
Design Engineer

コーセル株式会社
COSEL CO., LTD.



CONTENTS

1. Line Regulation	1
静的入力変動	
2. Input Current (by Load Current)	2
入力電流 (負荷特性)	
3. Input Power (by Load Current)	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage)	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current)	5
効率 (負荷特性)	
6. Hold-Up Time	6
出力保持時間	
7. Instantaneous Interruption Compensation	7
瞬時停電保障	
8. Load Regulation	8
静的負荷変動	
9. Ripple Voltage (by Load Current)	9
リップル電圧 (負荷特性)	
10. Ripple-Noise	10
リップルノイズ	
11. Overcurrent Protection	11
過電流保護	
12. Inrush Current	12
突入電流	
13. Dynamic Load Responce	13
動的負荷変動	
14. Rise and Fall Time	14
立上り、立下がり時間	
15. Ambient Temperature Drift	15
周囲温度変動	
16. Minimum Input Voltage for Regulated Output Voltage .	16
最低レギュレーション電圧	
17. Ripple Voltage (by Ambient Temperature)	17
リップル電圧 (周囲温度特性)	
18. Time Lapse Drift	18
経時ドリフト	
19. Output Voltage Accuracy	19
定電圧精度	
20. Condensation	20
結露特性	
21. Leakage Current	21
漏洩電流	
22. Line Noise Tolerance	22
入力雑音耐量	
23. Conducted Emission	23
雑音端子電圧	
24. Figure of Testing Circuitry	24
測定回路図	

(Final Page 25)

COSEL

Model	LDA15F-24		Temperature Testing Circuitry	25°C Figure A																																
Item	Line Regulation 静的输入变动																																			
Object	+24.0V 0.7A																																			
1. Graph			2. Values																																	
			<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>150</td><td>24.002</td><td>23.996</td></tr> <tr><td>160</td><td>24.001</td><td>23.997</td></tr> <tr><td>170</td><td>24.001</td><td>23.997</td></tr> <tr><td>180</td><td>24.001</td><td>23.996</td></tr> <tr><td>200</td><td>23.999</td><td>23.996</td></tr> <tr><td>220</td><td>23.999</td><td>23.994</td></tr> <tr><td>240</td><td>23.997</td><td>23.993</td></tr> <tr><td>264</td><td>23.996</td><td>23.992</td></tr> <tr><td>280</td><td>23.995</td><td>23.990</td></tr> </tbody> </table>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	150	24.002	23.996	160	24.001	23.997	170	24.001	23.997	180	24.001	23.996	200	23.999	23.996	220	23.999	23.994	240	23.997	23.993	264	23.996	23.992	280	23.995	23.990
Input Voltage [V]	Output Voltage [V]																																			
	Load 50%	Load 100%																																		
150	24.002	23.996																																		
160	24.001	23.997																																		
170	24.001	23.997																																		
180	24.001	23.996																																		
200	23.999	23.996																																		
220	23.999	23.994																																		
240	23.997	23.993																																		
264	23.996	23.992																																		
280	23.995	23.990																																		
	<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>																																			

COSSEL

Model	LDA15F-24																																																									
Item	Input Current (by Load Current) 入力電流 (負荷特性)	Temperature Testing Circuitry 25°C Figure A																																																								
Output	_____																																																									
1. Graph	<p>Legend:</p> <ul style="list-style-type: none"> Input Volt. 170V (Triangle) Input Volt. 200V (Square) Input Volt. 264V (Circle) 																																																									
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>170[V]</th> <th>200[V]</th> <th>264[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.034</td><td>0.035</td><td>0.039</td></tr> <tr><td>0.10</td><td>0.067</td><td>0.065</td><td>0.064</td></tr> <tr><td>0.20</td><td>0.099</td><td>0.092</td><td>0.085</td></tr> <tr><td>0.30</td><td>0.128</td><td>0.119</td><td>0.108</td></tr> <tr><td>0.40</td><td>0.157</td><td>0.145</td><td>0.129</td></tr> <tr><td>0.50</td><td>0.187</td><td>0.170</td><td>0.149</td></tr> <tr><td>0.60</td><td>0.215</td><td>0.195</td><td>0.171</td></tr> <tr><td>0.70</td><td>0.243</td><td>0.219</td><td>0.188</td></tr> <tr><td>0.77</td><td>0.264</td><td>0.237</td><td>0.202</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Current [A]			170[V]	200[V]	264[V]	0.00	0.034	0.035	0.039	0.10	0.067	0.065	0.064	0.20	0.099	0.092	0.085	0.30	0.128	0.119	0.108	0.40	0.157	0.145	0.129	0.50	0.187	0.170	0.149	0.60	0.215	0.195	0.171	0.70	0.243	0.219	0.188	0.77	0.264	0.237	0.202	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Current [A]																																																									
	170[V]	200[V]	264[V]																																																							
0.00	0.034	0.035	0.039																																																							
0.10	0.067	0.065	0.064																																																							
0.20	0.099	0.092	0.085																																																							
0.30	0.128	0.119	0.108																																																							
0.40	0.157	0.145	0.129																																																							
0.50	0.187	0.170	0.149																																																							
0.60	0.215	0.195	0.171																																																							
0.70	0.243	0.219	0.188																																																							
0.77	0.264	0.237	0.202																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
Note:	Slanted line shows the range of the rated load current																																																									
(注)	斜線は定格負荷電流範囲を示す。																																																									

COSEL

Model	LDA15F-24																																																									
Item	Input Power (by Load Current) 入力電力（負荷特性）	Temperature Testing Circuitry	25°C Figure A																																																							
Output	_____																																																									
1. Graph	<p>Legend:</p> <ul style="list-style-type: none"> △ Input Volt. 170V □ Input Volt. 200V ○ Input Volt. 264V <p>Y-axis: Input Power [W] (0 to 50)</p> <p>X-axis: Load Current [A] (0 to 1)</p>																																																									
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>2.10</td><td>2.60</td><td>3.60</td></tr> <tr><td>0.10</td><td>4.90</td><td>5.40</td><td>6.70</td></tr> <tr><td>0.20</td><td>7.80</td><td>8.20</td><td>9.40</td></tr> <tr><td>0.30</td><td>10.50</td><td>11.10</td><td>12.30</td></tr> <tr><td>0.40</td><td>13.20</td><td>13.70</td><td>15.10</td></tr> <tr><td>0.50</td><td>16.00</td><td>16.50</td><td>17.80</td></tr> <tr><td>0.60</td><td>18.80</td><td>19.10</td><td>20.70</td></tr> <tr><td>0.70</td><td>21.50</td><td>21.80</td><td>23.00</td></tr> <tr><td>0.77</td><td>23.50</td><td>23.80</td><td>24.90</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Power [W]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.00	2.10	2.60	3.60	0.10	4.90	5.40	6.70	0.20	7.80	8.20	9.40	0.30	10.50	11.10	12.30	0.40	13.20	13.70	15.10	0.50	16.00	16.50	17.80	0.60	18.80	19.10	20.70	0.70	21.50	21.80	23.00	0.77	23.50	23.80	24.90	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Power [W]																																																									
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																							
0.00	2.10	2.60	3.60																																																							
0.10	4.90	5.40	6.70																																																							
0.20	7.80	8.20	9.40																																																							
0.30	10.50	11.10	12.30																																																							
0.40	13.20	13.70	15.10																																																							
0.50	16.00	16.50	17.80																																																							
0.60	18.80	19.10	20.70																																																							
0.70	21.50	21.80	23.00																																																							
0.77	23.50	23.80	24.90																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。

COSEL

Model	LDA15F-24																																	
Item	Efficiency 効率	Temperature 25°C Testing Circuitry Figure A																																
Object	—	—																																
1. Graph																																		
<p>The graph plots Efficiency [%] on the y-axis (54 to 82) against Input Voltage [V] on the x-axis (0 to 300). Two sets of data points are shown: Load 50% (squares) and Load 100% (triangles). Both series show a general decrease in efficiency as input voltage increases. Two slanted lines indicate the rated input voltage range.</p>																																		
2. Values																																		
<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr> <td>150</td> <td>74.7</td> <td>81.0</td> </tr> <tr> <td>160</td> <td>74.3</td> <td>80.9</td> </tr> <tr> <td>170</td> <td>73.8</td> <td>80.7</td> </tr> <tr> <td>180</td> <td>72.0</td> <td>80.1</td> </tr> <tr> <td>200</td> <td>69.9</td> <td>79.5</td> </tr> <tr> <td>220</td> <td>67.4</td> <td>78.1</td> </tr> <tr> <td>240</td> <td>65.0</td> <td>77.0</td> </tr> <tr> <td>264</td> <td>63.1</td> <td>75.4</td> </tr> <tr> <td>280</td> <td>61.2</td> <td>73.0</td> </tr> </tbody> </table>			Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	150	74.7	81.0	160	74.3	80.9	170	73.8	80.7	180	72.0	80.1	200	69.9	79.5	220	67.4	78.1	240	65.0	77.0	264	63.1	75.4	280	61.2	73.0
Input Voltage [V]	Efficiency [%]																																	
	Load 50%	Load 100%																																
150	74.7	81.0																																
160	74.3	80.9																																
170	73.8	80.7																																
180	72.0	80.1																																
200	69.9	79.5																																
220	67.4	78.1																																
240	65.0	77.0																																
264	63.1	75.4																																
280	61.2	73.0																																

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

COSEL

Model	LDA15F-24																																																									
Item	Efficiency (by Load Current) 効率（負荷電流特性）	Temperature Testing Circuitry	25°C Figure A																																																							
Output	_____																																																									
1. Graph	<p>Legend: Input Volt. 170V (△), Input Volt. 200V (□), Input Volt. 264V (○)</p> <table border="1"> <caption>Data points estimated from the graph</caption> <thead> <tr> <th>Load Current [A]</th> <th>Efficiency 170V [%]</th> <th>Efficiency 200V [%]</th> <th>Efficiency 264V [%]</th> </tr> </thead> <tbody> <tr><td>0.10</td><td>55</td><td>48</td><td>40</td></tr> <tr><td>0.20</td><td>65</td><td>60</td><td>55</td></tr> <tr><td>0.30</td><td>72</td><td>68</td><td>62</td></tr> <tr><td>0.40</td><td>76</td><td>73</td><td>67</td></tr> <tr><td>0.50</td><td>78</td><td>75</td><td>70</td></tr> <tr><td>0.60</td><td>80</td><td>78</td><td>75</td></tr> <tr><td>0.70</td><td>81</td><td>80</td><td>77</td></tr> <tr><td>0.80</td><td>81</td><td>80</td><td>77</td></tr> </tbody> </table>			Load Current [A]	Efficiency 170V [%]	Efficiency 200V [%]	Efficiency 264V [%]	0.10	55	48	40	0.20	65	60	55	0.30	72	68	62	0.40	76	73	67	0.50	78	75	70	0.60	80	78	75	0.70	81	80	77	0.80	81	80	77																			
Load Current [A]	Efficiency 170V [%]	Efficiency 200V [%]	Efficiency 264V [%]																																																							
0.10	55	48	40																																																							
0.20	65	60	55																																																							
0.30	72	68	62																																																							
0.40	76	73	67																																																							
0.50	78	75	70																																																							
0.60	80	78	75																																																							
0.70	81	80	77																																																							
0.80	81	80	77																																																							
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.10</td><td>54.3</td><td>49.5</td><td>39.7</td></tr> <tr><td>0.20</td><td>65.0</td><td>61.9</td><td>54.0</td></tr> <tr><td>0.30</td><td>71.9</td><td>68.1</td><td>61.5</td></tr> <tr><td>0.40</td><td>76.0</td><td>73.2</td><td>66.5</td></tr> <tr><td>0.50</td><td>78.3</td><td>75.9</td><td>70.3</td></tr> <tr><td>0.60</td><td>79.5</td><td>78.1</td><td>73.3</td></tr> <tr><td>0.70</td><td>80.7</td><td>79.5</td><td>75.4</td></tr> <tr><td>0.77</td><td>81.1</td><td>80.1</td><td>76.6</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Efficiency [%]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.10	54.3	49.5	39.7	0.20	65.0	61.9	54.0	0.30	71.9	68.1	61.5	0.40	76.0	73.2	66.5	0.50	78.3	75.9	70.3	0.60	79.5	78.1	73.3	0.70	80.7	79.5	75.4	0.77	81.1	80.1	76.6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Efficiency [%]																																																									
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																							
0.10	54.3	49.5	39.7																																																							
0.20	65.0	61.9	54.0																																																							
0.30	71.9	68.1	61.5																																																							
0.40	76.0	73.2	66.5																																																							
0.50	78.3	75.9	70.3																																																							
0.60	79.5	78.1	73.3																																																							
0.70	80.7	79.5	75.4																																																							
0.77	81.1	80.1	76.6																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							

Note: Slanted line shows the range of the rated load current

(注) 斜線は定格負荷電流範囲を示す。

COSEL

Model	LDA15F-24	Temperature Testing Circuitry	25°C Figure A																																
Item	Hold-Up Time 出力保持時間																																		
Object	+24.0V 0.7A																																		
1. Graph		2. Values																																	
			<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Hold-Up Time [mS]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>150</td><td>128</td><td>63</td></tr> <tr><td>160</td><td>146</td><td>73</td></tr> <tr><td>170</td><td>166</td><td>84</td></tr> <tr><td>180</td><td>186</td><td>95</td></tr> <tr><td>200</td><td>230</td><td>121</td></tr> <tr><td>220</td><td>278</td><td>147</td></tr> <tr><td>240</td><td>329</td><td>179</td></tr> <tr><td>264</td><td>395</td><td>218</td></tr> <tr><td>280</td><td>443</td><td>247</td></tr> </tbody> </table>	Input Voltage [V]	Hold-Up Time [mS]		Load 50%	Load 100%	150	128	63	160	146	73	170	166	84	180	186	95	200	230	121	220	278	147	240	329	179	264	395	218	280	443	247
Input Voltage [V]	Hold-Up Time [mS]																																		
	Load 50%	Load 100%																																	
150	128	63																																	
160	146	73																																	
170	166	84																																	
180	186	95																																	
200	230	121																																	
220	278	147																																	
240	329	179																																	
264	395	218																																	
280	443	247																																	

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated input voltage.

出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。

(注)斜線は定格入力電圧範囲を示す。

COSEL

Model	LDA15F-24	Temperature	25°C																																																			
Item	Instantaneous Interruption Compensation 瞬時停電保障	Testing Circuitry	Figure A																																																			
Object	+24.0 V 0.7 A	2. Values																																																				
1. Graph																																																						
	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Time [mS]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td><td>—</td><td>—</td><td>—</td></tr> <tr> <td>0.10</td><td>470</td><td>632</td><td>1036</td></tr> <tr> <td>0.20</td><td>272</td><td>372</td><td>633</td></tr> <tr> <td>0.30</td><td>191</td><td>266</td><td>460</td></tr> <tr> <td>0.40</td><td>146</td><td>206</td><td>361</td></tr> <tr> <td>0.50</td><td>115</td><td>164</td><td>294</td></tr> <tr> <td>0.60</td><td>94</td><td>136</td><td>248</td></tr> <tr> <td>0.70</td><td>78</td><td>115</td><td>213</td></tr> <tr> <td>0.77</td><td>69</td><td>102</td><td>190</td></tr> <tr> <td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr> <td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Time [mS]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.00	—	—	—	0.10	470	632	1036	0.20	272	372	633	0.30	191	266	460	0.40	146	206	361	0.50	115	164	294	0.60	94	136	248	0.70	78	115	213	0.77	69	102	190	—	—	—	—	—	—	—	—
Load Current [A]	Time [mS]																																																					
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																			
0.00	—	—	—																																																			
0.10	470	632	1036																																																			
0.20	272	372	633																																																			
0.30	191	266	460																																																			
0.40	146	206	361																																																			
0.50	115	164	294																																																			
0.60	94	136	248																																																			
0.70	78	115	213																																																			
0.77	69	102	190																																																			
—	—	—	—																																																			
—	—	—	—																																																			


This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated load current.

瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。

(注)斜線は定格負荷電流範囲を示す。

COSEL

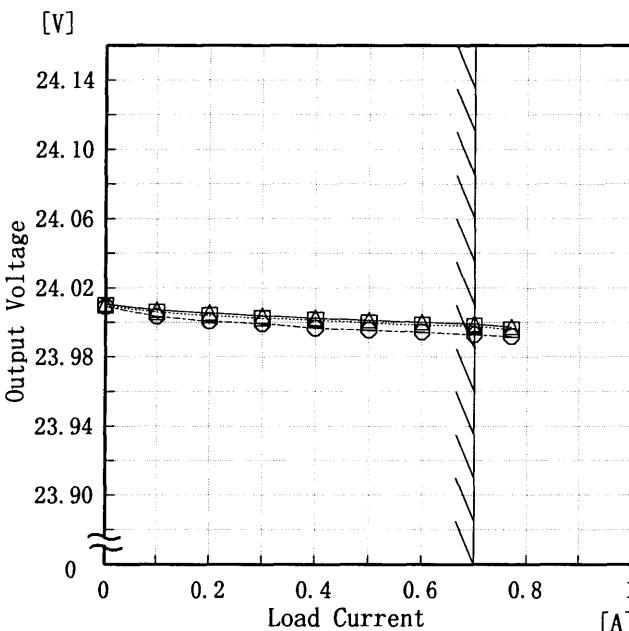Model	LDA15F-24																																																	
Item	Load Regulation 靜的負荷変動	Temperature Testing Circuitry	25°C Figure A																																															
Object	+24.0V 0.7A																																																	
1. Graph																																																		
—△— Input Volt. 170 V -□- Input Volt. 200 V -○- Input Volt. 264 V																																																		
																																																		
Note: Slanted line shows the range of the rated load current.																																																		
(注)斜線は定格負荷電流範囲を示す。																																																		
2. Values																																																		
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td><td>24.011</td><td>24.010</td><td>24.009</td></tr> <tr> <td>0.10</td><td>24.007</td><td>24.006</td><td>24.003</td></tr> <tr> <td>0.20</td><td>24.006</td><td>24.004</td><td>24.001</td></tr> <tr> <td>0.30</td><td>24.004</td><td>24.002</td><td>23.999</td></tr> <tr> <td>0.40</td><td>24.003</td><td>24.001</td><td>23.997</td></tr> <tr> <td>0.50</td><td>24.001</td><td>24.000</td><td>23.996</td></tr> <tr> <td>0.60</td><td>24.000</td><td>23.998</td><td>23.994</td></tr> <tr> <td>0.70</td><td>23.999</td><td>23.998</td><td>23.993</td></tr> <tr> <td>0.77</td><td>23.997</td><td>23.996</td><td>23.992</td></tr> <tr> <td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Load Current [A]	Output Voltage [V]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.00	24.011	24.010	24.009	0.10	24.007	24.006	24.003	0.20	24.006	24.004	24.001	0.30	24.004	24.002	23.999	0.40	24.003	24.001	23.997	0.50	24.001	24.000	23.996	0.60	24.000	23.998	23.994	0.70	23.999	23.998	23.993	0.77	23.997	23.996	23.992	—	—	—	—
Load Current [A]	Output Voltage [V]																																																	
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																															
0.00	24.011	24.010	24.009																																															
0.10	24.007	24.006	24.003																																															
0.20	24.006	24.004	24.001																																															
0.30	24.004	24.002	23.999																																															
0.40	24.003	24.001	23.997																																															
0.50	24.001	24.000	23.996																																															
0.60	24.000	23.998	23.994																																															
0.70	23.999	23.998	23.993																																															
0.77	23.997	23.996	23.992																																															
—	—	—	—																																															

COSEL

Model	LDA15F-24	Temperature	25°C																																						
Item	Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)	Testing Circuitry	Figure A																																						
Object	+24.0V 0.7A																																								
1. Graph																																									
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 170 [V]</th> <th>Input Volt. 264 [V]</th> </tr> <tr> <th>Ripple Output Volt. [mV]</th> <th>Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>10</td><td>10</td></tr> <tr><td>0.10</td><td>10</td><td>10</td></tr> <tr><td>0.20</td><td>10</td><td>10</td></tr> <tr><td>0.40</td><td>10</td><td>10</td></tr> <tr><td>0.50</td><td>10</td><td>10</td></tr> <tr><td>0.60</td><td>10</td><td>10</td></tr> <tr><td>0.65</td><td>10</td><td>10</td></tr> <tr><td>0.70</td><td>10</td><td>10</td></tr> <tr><td>0.77</td><td>10</td><td>10</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.00	10	10	0.10	10	10	0.20	10	10	0.40	10	10	0.50	10	10	0.60	10	10	0.65	10	10	0.70	10	10	0.77	10	10	—	—	—	—	—	—
Load Current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]																																							
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																							
0.00	10	10																																							
0.10	10	10																																							
0.20	10	10																																							
0.40	10	10																																							
0.50	10	10																																							
0.60	10	10																																							
0.65	10	10																																							
0.70	10	10																																							
0.77	10	10																																							
—	—	—																																							
—	—	—																																							
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p – p 値で示される。 (注)斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line T2: Due to Switching</p>																																									
<p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																									

COSEL


Model	LDA15F-24	Temperature Testing Circuitry	25°C Figure A																																								
Item	Ripple-Noise リップルノイズ																																										
Object	+24.0V 0.7A																																										
1. Graph	□ Input Volt. 170V [mV] △ Input Volt. 264V	2. Values																																									
			<table border="1"> <thead> <tr> <th rowspan="2">Load current [A]</th> <th>Input Volt. 170 [V]</th> <th>Input Volt. 264 [V]</th> </tr> <tr> <th>Ripple-Noise [mV]</th> <th>Ripple-Noise [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>15</td><td>15</td></tr> <tr><td>0.10</td><td>15</td><td>15</td></tr> <tr><td>0.20</td><td>15</td><td>15</td></tr> <tr><td>0.30</td><td>15</td><td>15</td></tr> <tr><td>0.40</td><td>15</td><td>15</td></tr> <tr><td>0.50</td><td>20</td><td>15</td></tr> <tr><td>0.60</td><td>20</td><td>20</td></tr> <tr><td>0.70</td><td>20</td><td>20</td></tr> <tr><td>0.77</td><td>20</td><td>20</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.00	15	15	0.10	15	15	0.20	15	15	0.30	15	15	0.40	15	15	0.50	20	15	0.60	20	20	0.70	20	20	0.77	20	20	—	—	—	—	—	—
Load current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]																																									
	Ripple-Noise [mV]	Ripple-Noise [mV]																																									
0.00	15	15																																									
0.10	15	15																																									
0.20	15	15																																									
0.30	15	15																																									
0.40	15	15																																									
0.50	20	15																																									
0.60	20	20																																									
0.70	20	20																																									
0.77	20	20																																									
—	—	—																																									
—	—	—																																									
<p>Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図 p - p 値で示される。 (注) 斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line T2: Due to Switching</p>																																											
<p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>			<p>-10-</p> <p>BC-4049</p>																																								

COSEL

Model	LDA15F-24																																																									
Item	Overcurrent Protection 過電流保護																																																									
Object	+24.0V 0.7A																																																									
1. Graph	<p>[V] Input Volt. 170 V Input Volt. 200 V Input Volt. 264 V</p> <p>Output Voltage [V]</p> <p>Load Current [A]</p>																																																									
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>24.00</td><td>0.88</td><td>0.87</td><td>0.89</td></tr> <tr><td>22.80</td><td>0.89</td><td>0.88</td><td>0.90</td></tr> <tr><td>21.60</td><td>0.91</td><td>0.90</td><td>0.92</td></tr> <tr><td>19.20</td><td>0.94</td><td>0.93</td><td>0.95</td></tr> <tr><td>16.80</td><td>0.97</td><td>0.96</td><td>0.97</td></tr> <tr><td>14.40</td><td>1.00</td><td>0.99</td><td>1.01</td></tr> <tr><td>12.00</td><td>1.02</td><td>1.00</td><td>1.03</td></tr> <tr><td>9.60</td><td>1.03</td><td>1.02</td><td>1.05</td></tr> <tr><td>7.20</td><td>1.02</td><td>1.02</td><td>1.07</td></tr> <tr><td>4.80</td><td>0.98</td><td>0.99</td><td>1.04</td></tr> <tr><td>2.40</td><td>0.89</td><td>0.90</td><td>0.97</td></tr> <tr><td>0.00</td><td>0.73</td><td>0.75</td><td>0.90</td></tr> </tbody> </table>			Output Voltage [V]	Load Current [A]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	24.00	0.88	0.87	0.89	22.80	0.89	0.88	0.90	21.60	0.91	0.90	0.92	19.20	0.94	0.93	0.95	16.80	0.97	0.96	0.97	14.40	1.00	0.99	1.01	12.00	1.02	1.00	1.03	9.60	1.03	1.02	1.05	7.20	1.02	1.02	1.07	4.80	0.98	0.99	1.04	2.40	0.89	0.90	0.97	0.00	0.73	0.75	0.90
Output Voltage [V]	Load Current [A]																																																									
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																							
24.00	0.88	0.87	0.89																																																							
22.80	0.89	0.88	0.90																																																							
21.60	0.91	0.90	0.92																																																							
19.20	0.94	0.93	0.95																																																							
16.80	0.97	0.96	0.97																																																							
14.40	1.00	0.99	1.01																																																							
12.00	1.02	1.00	1.03																																																							
9.60	1.03	1.02	1.05																																																							
7.20	1.02	1.02	1.07																																																							
4.80	0.98	0.99	1.04																																																							
2.40	0.89	0.90	0.97																																																							
0.00	0.73	0.75	0.90																																																							

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

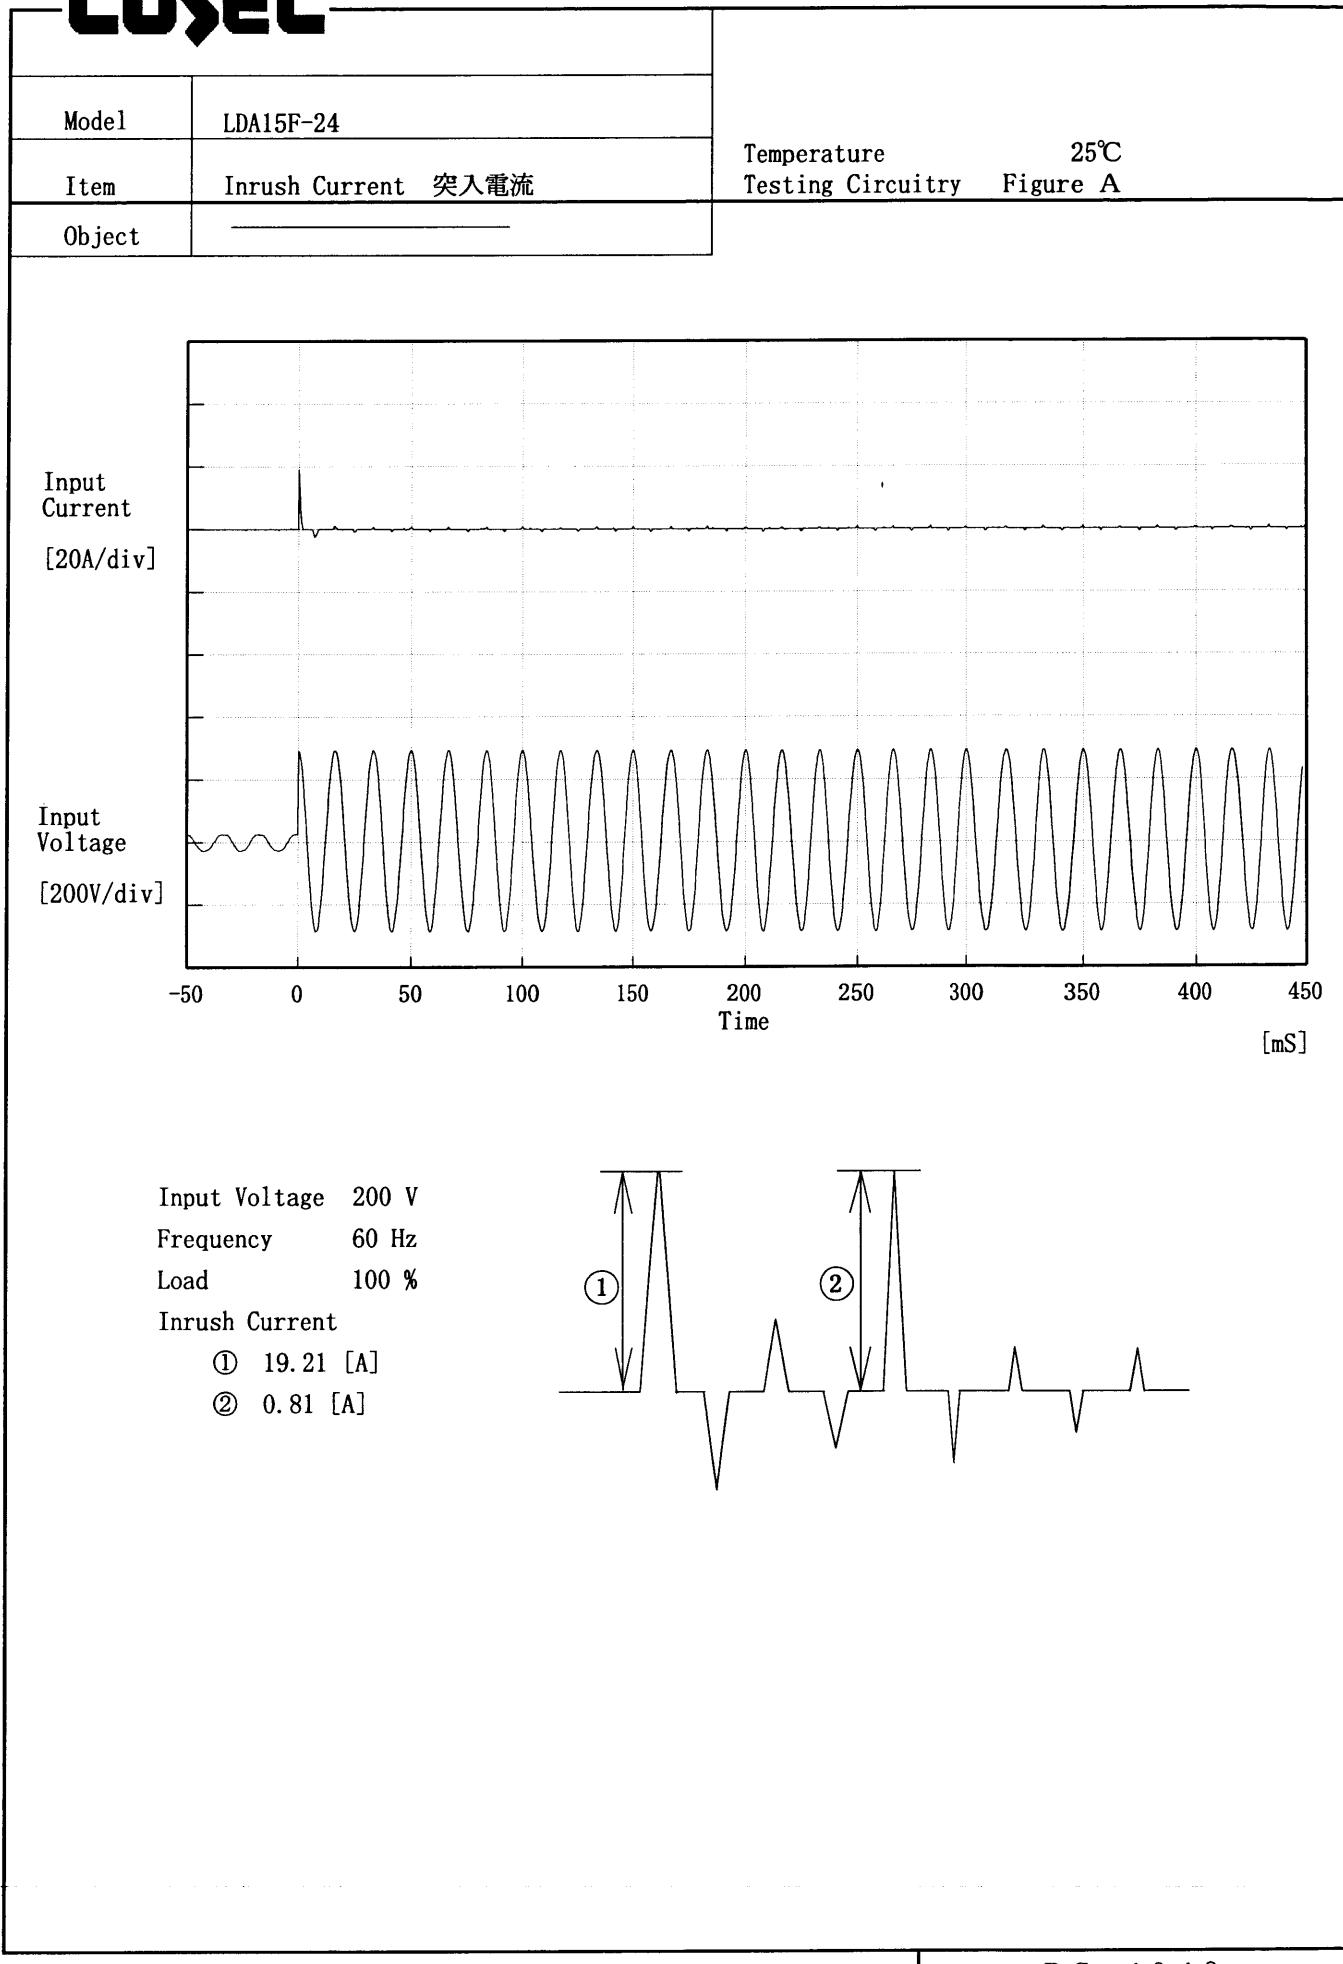COSEL

COSEL



Model	LDA15F-24	Temperature Testing Circuitry	25°C Figure A
Item	Dynamic Load Response 動的負荷變動		
Object	+24.0V 0.7A		

Input Volt. 200 V
 Cycle 1000 mS





Load 0% ↔

Load 100 %

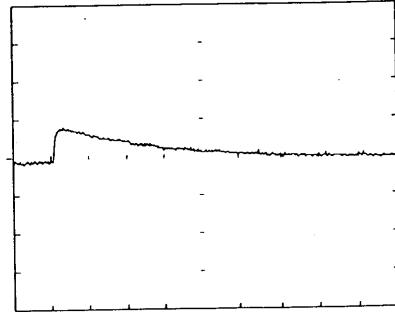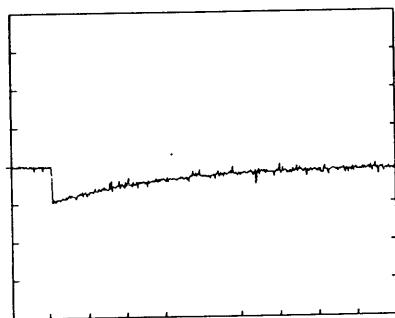

Load 0% ↔

Load 50 %

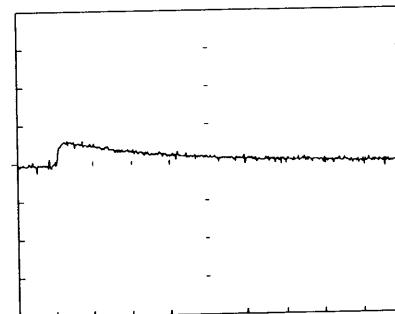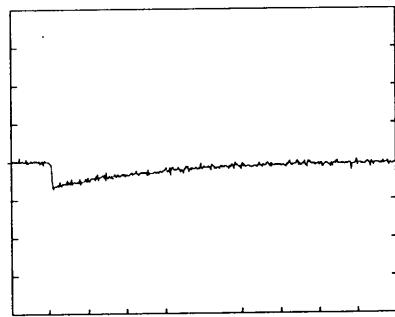



200 mV/div

10 mS/div

COSEL


Model	LDA15F-24	Temperature Testing Circuitry Figure A	25°C
Item	Rise and Fall Time 立上り、立下り時間		
Object	+24.0V 0.7A		

1. Graph

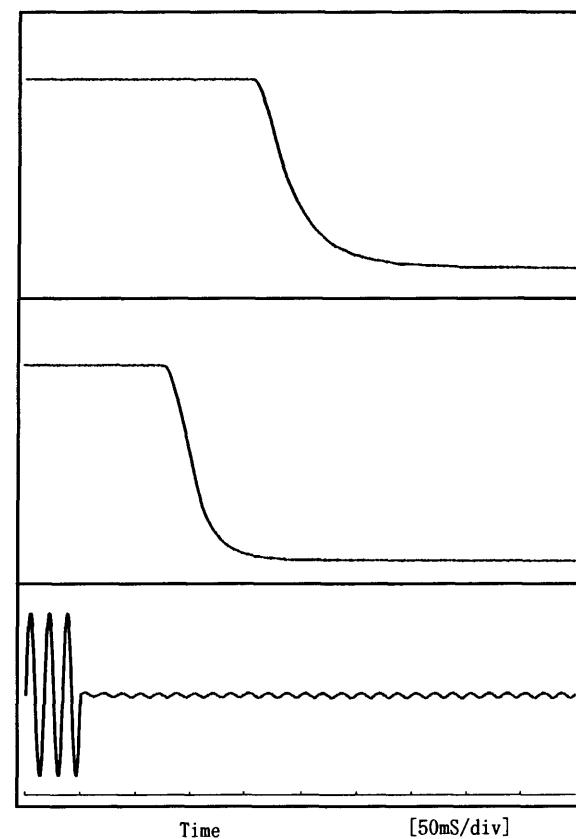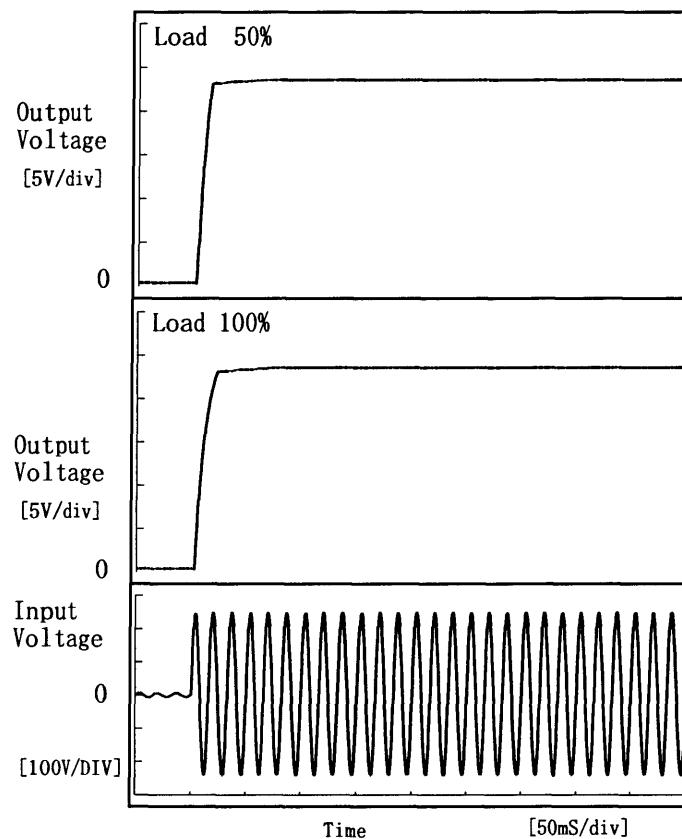

2. Values

Load	Time	T _d	T _r	T _s	T _h	T _f	[mS]
50 %		3.3	12.3	15.5	165.8	130.0	
100 %		3.3	17.5	20.8	84.8	58.0	

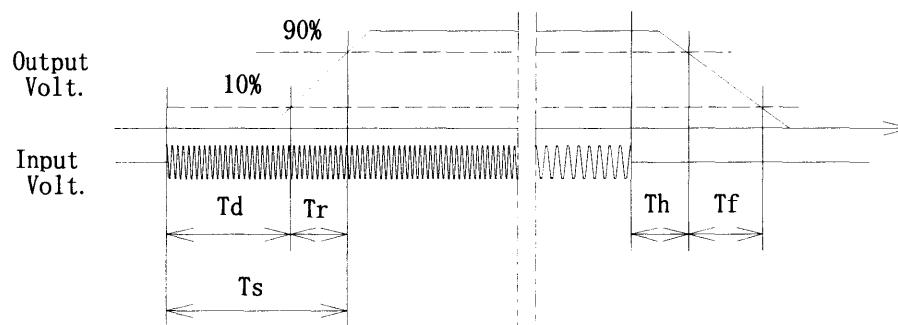


COSEL

Model	LDA15F-24	Testing Circuitry Figure A																																																					
Item	Ambient Temperature Drift 周囲温度変動																																																						
Object	+24.0V 0.7A																																																						
1. Graph	<p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p>	2. Values																																																					
	<p>—△— Input Volt. 170V</p> <p>—□— Input Volt. 200V</p> <p>—○— Input Volt. 264V</p> <p>[V]</p>	<table border="1"> <thead> <tr> <th rowspan="2">Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr> <td>-20</td> <td>24.005</td> <td>24.004</td> <td>24.001</td> </tr> <tr> <td>-10</td> <td>24.005</td> <td>24.003</td> <td>23.999</td> </tr> <tr> <td>0</td> <td>24.002</td> <td>24.000</td> <td>23.998</td> </tr> <tr> <td>10</td> <td>24.000</td> <td>23.998</td> <td>23.995</td> </tr> <tr> <td>20</td> <td>23.998</td> <td>23.996</td> <td>23.993</td> </tr> <tr> <td>25</td> <td>23.996</td> <td>23.994</td> <td>23.990</td> </tr> <tr> <td>30</td> <td>23.994</td> <td>23.992</td> <td>23.988</td> </tr> <tr> <td>40</td> <td>23.982</td> <td>23.980</td> <td>23.977</td> </tr> <tr> <td>50</td> <td>23.966</td> <td>23.965</td> <td>23.961</td> </tr> <tr> <td>60</td> <td>23.946</td> <td>23.944</td> <td>23.940</td> </tr> <tr> <td>—</td> <td>—</td> <td>—</td> <td>—</td> </tr> </tbody> </table>	Temperature [°C]	Output Voltage [V]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	-20	24.005	24.004	24.001	-10	24.005	24.003	23.999	0	24.002	24.000	23.998	10	24.000	23.998	23.995	20	23.998	23.996	23.993	25	23.996	23.994	23.990	30	23.994	23.992	23.988	40	23.982	23.980	23.977	50	23.966	23.965	23.961	60	23.946	23.944	23.940	—	—	—	—		
Temperature [°C]	Output Voltage [V]																																																						
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																				
-20	24.005	24.004	24.001																																																				
-10	24.005	24.003	23.999																																																				
0	24.002	24.000	23.998																																																				
10	24.000	23.998	23.995																																																				
20	23.998	23.996	23.993																																																				
25	23.996	23.994	23.990																																																				
30	23.994	23.992	23.988																																																				
40	23.982	23.980	23.977																																																				
50	23.966	23.965	23.961																																																				
60	23.946	23.944	23.940																																																				
—	—	—	—																																																				

(注)斜線は定格周囲温度範囲を示す。

COSEL

Model	LDA15F-24
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧
Object	+24.0V 0.7A

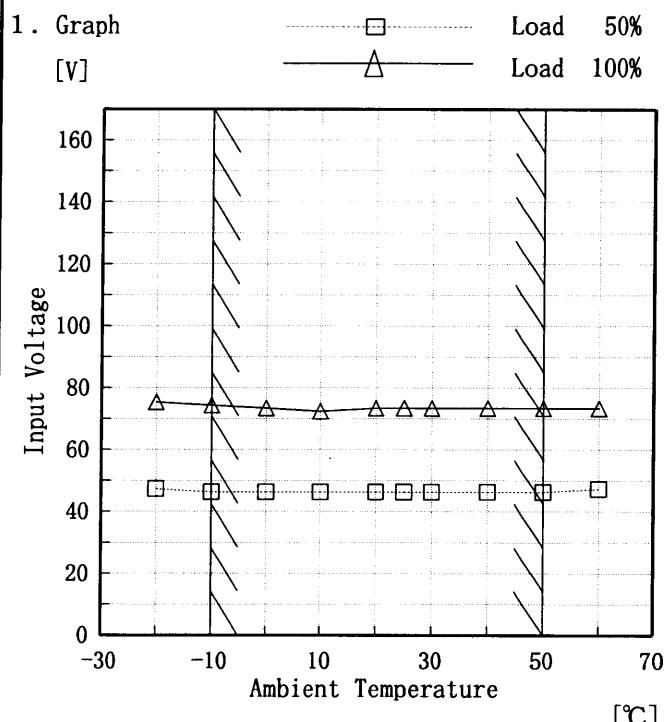

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-20	47	75
-10	46	74
0	46	73
10	46	72
20	46	73
25	46	73
30	46	73
40	46	73
50	46	73
60	47	73
—	—	—


COSCEL

Model	LDA15F-24
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+24.0V 0.7A

Testing Circuitry

Figure A

1. Graph

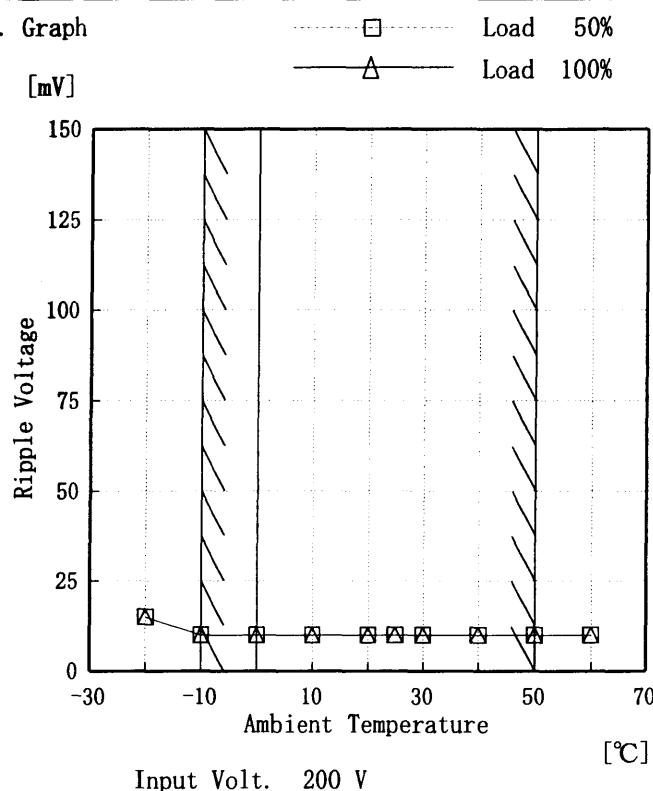

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]
-20	15	15
-10	10	10
0	10	10
10	10	10
20	10	10
25	10	10
30	10	10
40	10	10
50	10	10
60	10	10
—	—	—

COSEL

Model	LDA15F-24	Temperature Testing Circuitry	25°C Figure A																					
Item	Time Lapse Drift 経時ドリフト																							
Object	+24.0V 0.7A																							
1. Graph			2. Values																					
<p>[V]</p> <table> <thead> <tr> <th>Time [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>23.996</td></tr> <tr><td>0.5</td><td>23.979</td></tr> <tr><td>1.0</td><td>23.979</td></tr> <tr><td>2.0</td><td>23.979</td></tr> <tr><td>3.0</td><td>23.980</td></tr> <tr><td>4.0</td><td>23.980</td></tr> <tr><td>5.0</td><td>23.980</td></tr> <tr><td>6.0</td><td>23.980</td></tr> <tr><td>7.0</td><td>23.980</td></tr> <tr><td>8.0</td><td>23.980</td></tr> </tbody> </table>			Time [H]	Output Voltage [V]	0.0	23.996	0.5	23.979	1.0	23.979	2.0	23.979	3.0	23.980	4.0	23.980	5.0	23.980	6.0	23.980	7.0	23.980	8.0	23.980
Time [H]	Output Voltage [V]																							
0.0	23.996																							
0.5	23.979																							
1.0	23.979																							
2.0	23.979																							
3.0	23.980																							
4.0	23.980																							
5.0	23.980																							
6.0	23.980																							
7.0	23.980																							
8.0	23.980																							
<p>Output Voltage [V]</p> <p>Input Volt. 200V</p> <p>Load 100%</p>																								

COSEL

Model	LDA15F-24	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+24.0V 0.7A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature -10~50 °C

Input Voltage: 170~264 V

Load Current : 0~0.7 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

$$* \text{ Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 170~264 V

負荷電流 0~0.7 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

$$* \text{ 定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-10	170	0.0	24.017		
Minimum Voltage	50	264	0.7	23.956	±31	±0.2



Model	LDA15F-24		
Item	Condensation 結露特性	Testing Circuitry	Figure A
Object	+24.0V 0.7A		

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	23.933	Input Volt.: 200V, Load Current: 0.7A
Line Regulation [mV]	10	Input Volt.: 170~264V, Load Current: 0.7A
Load Regulation [mV]	19	Input Volt.: 200V, Load Current: 0~0.7A



Model	LDA15F-24	Temperature	25°C
Item	Leakage Current 漏洩電流	Testing Circuitry	Figure B
Object	<hr/>		

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	—	—	—
(B) IEC60950	—	—	—

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力の両相について測定し、その大きい方を漏洩電流測定値とする。

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	0.25	0.36	0.44

Model	LDA15F-24	Temperature Testing Circuitry	25°C Figure C
Item	Line Noise Tolerance 入力雑音耐量		
Object	+24.0V 0.7A		

1. Results

Pulse Width [nS]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

2. Conditions

Input Voltage : 200 V
 Pulse Voltage : 2000 V
 Pulse Cycle : 10 mS
 Pulse Input Duration : 1 min. or more
 Load : 100 %

COSEL

Model	LDA15F-24	Temperature	25°C
Item	Conducted Emission 雜音端子電圧	Testing Circuitry	Figure D
Object	_____		

1. Graph


Remarks

Input Volt. 230 V

Load 100 %

規格 1 : [EN 55022] Class B(平均値)

規格 2 : [EN 55022] Class B(QP)

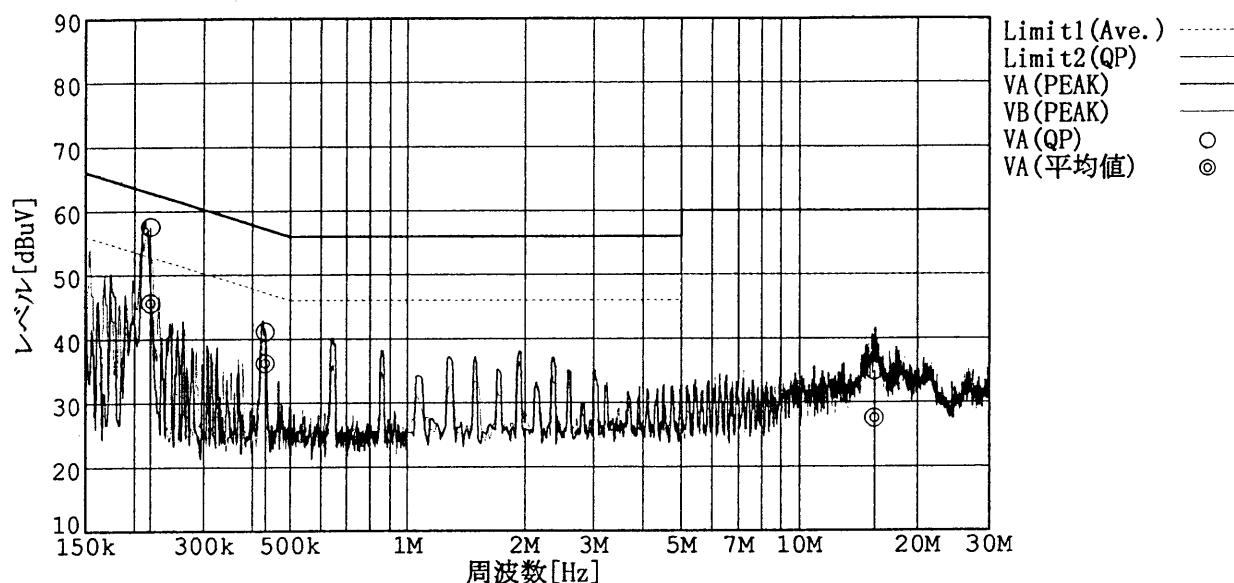

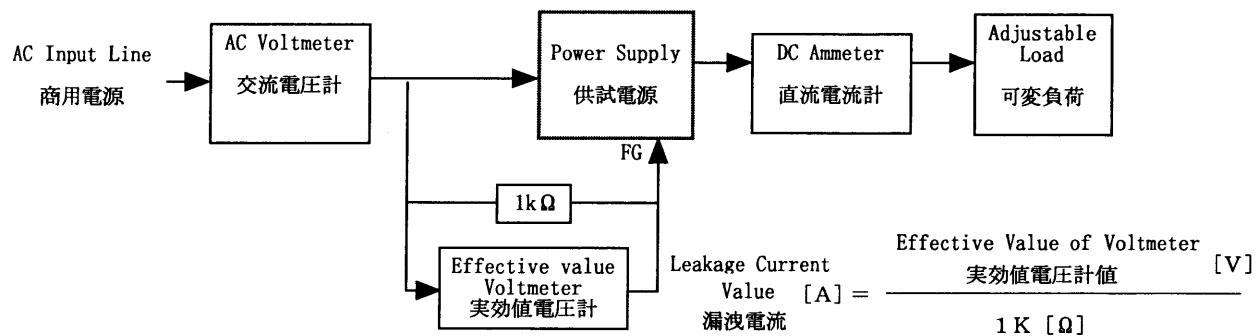
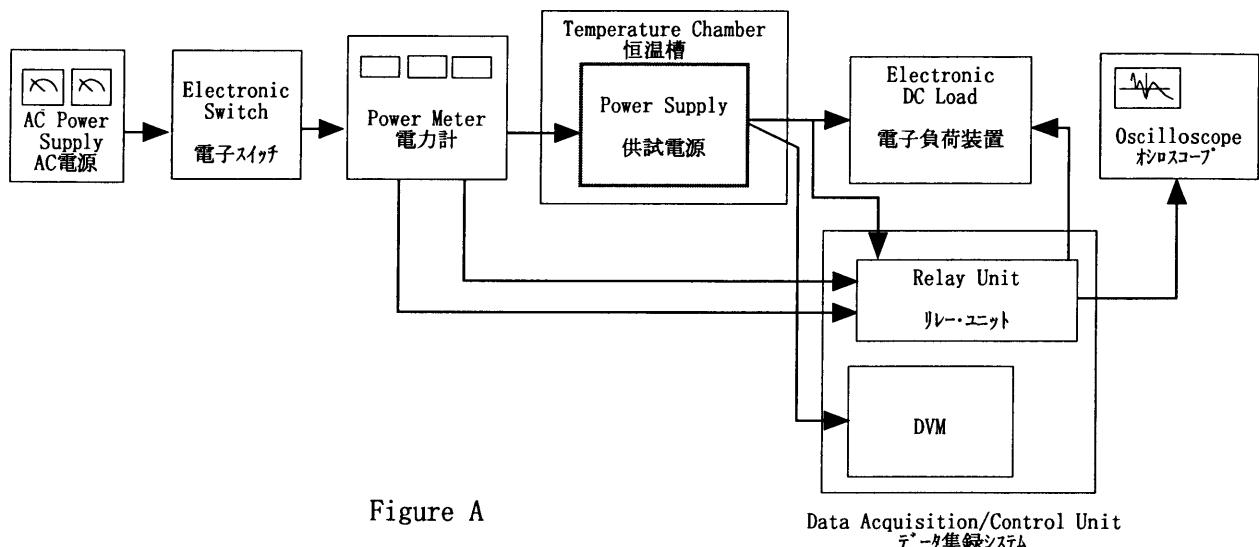


Figure B (DENTORI)

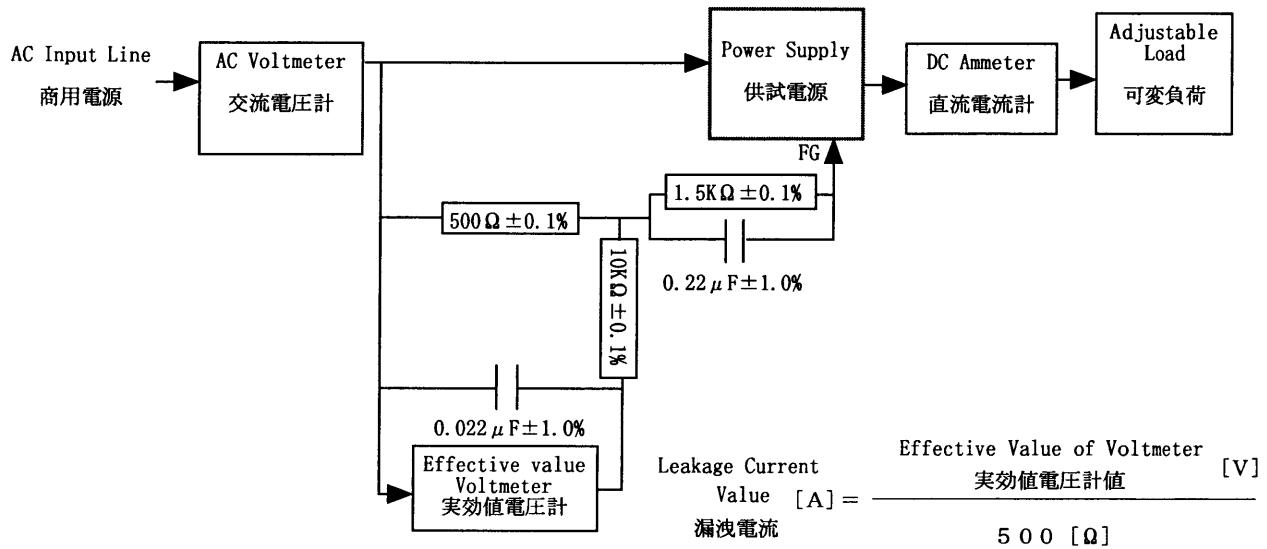


Figure B (IEC 60950)

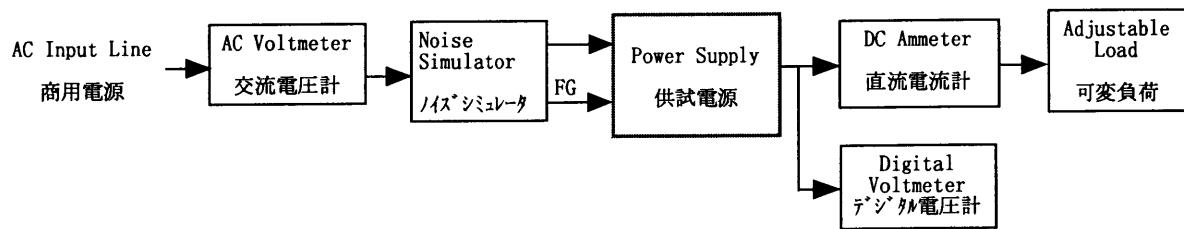


Figure C

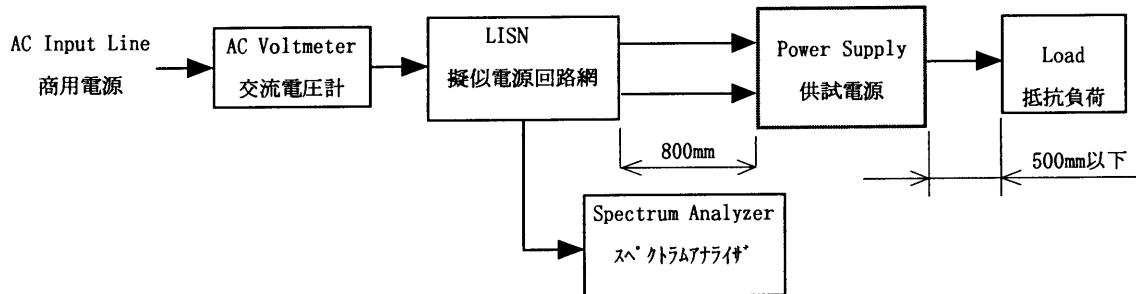


Figure D

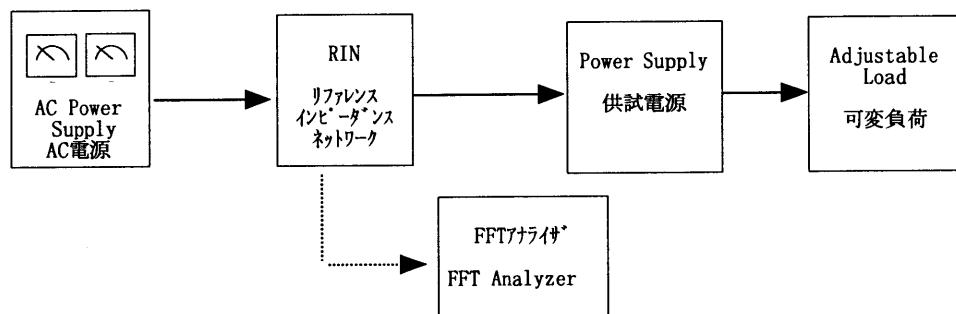


Figure E