




RADIATED EMISSION

Model Name : LDA15F-3
 Model No. :
 Serial No. :
 Points : 4
 Detector : PEAK/QP
 Polarization : Hori. & Vert.

Power Supply : 230V(1 Phase) 50Hz
 Temp. : 25degC
 Humi. : 44%
 Date : 2003/4/11 8:35
 Test Equip. : R3132,ESPC
 Comment : lo=100%

Limit: [CISPR 22] Class B<3m>

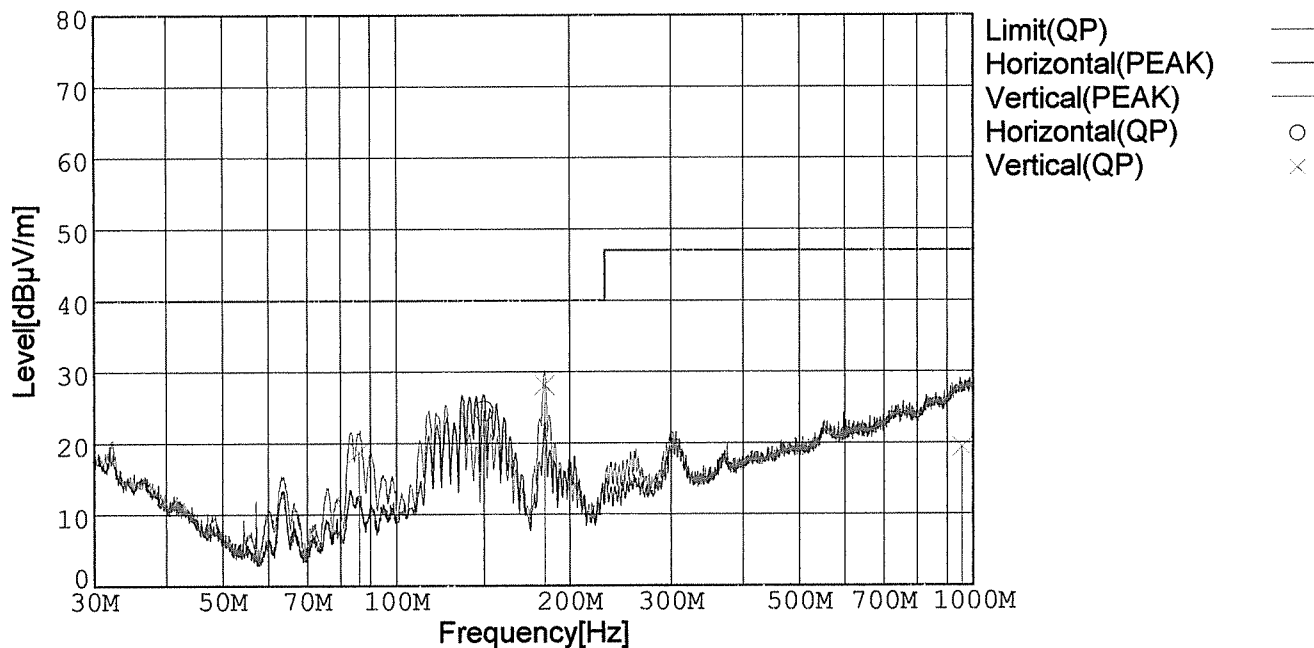

Frequency [MHz]	Meter Reading (QP) [dBμV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level (QP) [dBμV/m]	Angle[°]	Height [cm]	Polar.	Limit [dBμV/m]	Margin [dB]
86.109	42.5	BL	8.1	-31.9	18.7	21	135	Vert.	40.0	21.3
141.857	45.3	BL	10.8	-31.6	24.5	275	156	Hori.	40.0	15.5
180.852	51.0	BL	8.4	-31.3	28.1	42	110	Vert.	40.0	11.9
956.637	23.6	BL	25.1	-29.3	19.4	57	128	Vert.	47.0	27.6

BL: Biconi-Log



LINE CONDUCTION

Model Name : LDA15F-3

Model No. :

Serial No. :

Points : 4

Detector : PEAK/QP/Ave.

Line Mode : VA/VB

Limit1: [CISPR Pub22] Class B(QP)

Limit2: [CISPR Pub22] Class B(Ave.)

Power Supply : 230V(1 Phase) 50Hz


Temp. : 25deg C

Humi. : 44%

Date : 2003/4/4 10:11

Test Equip. : R3132,ESPC

Comment : Io=100%

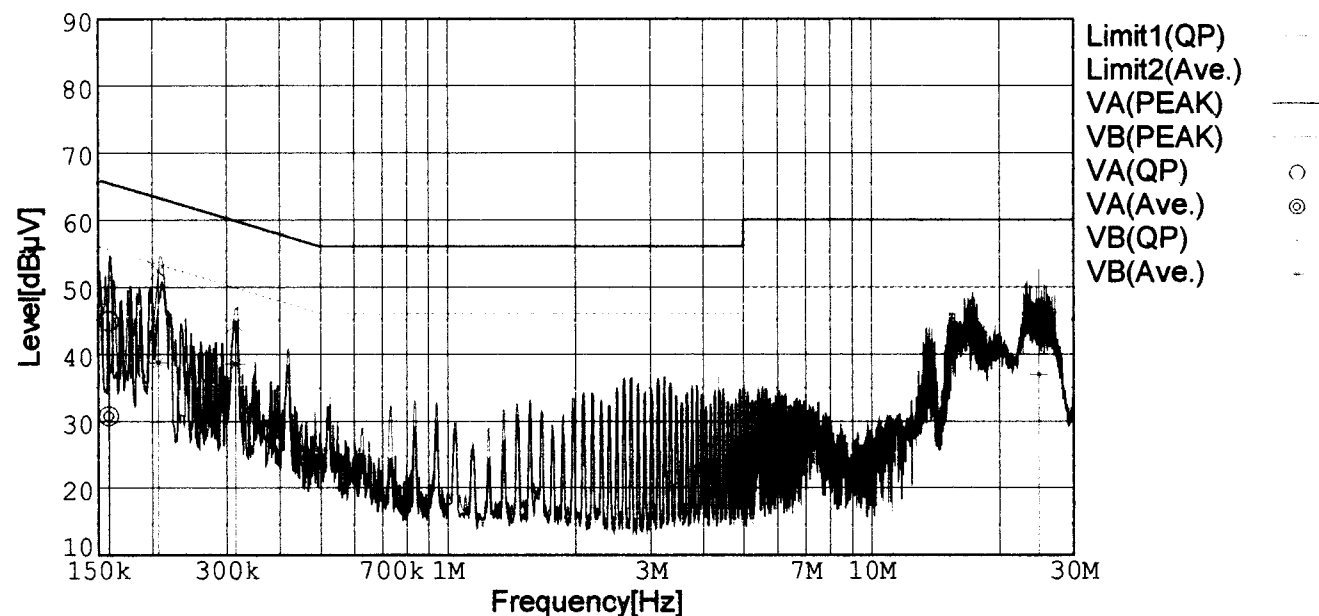

Frequency [MHz]	Meter Reading (QP) [dBμV]	Meter Reading (Ave.) [dBμV]	Factor [dB]	Level (QP) [dBμV]	Level (Ave.) [dBμV]	Line	Limit (QP) [dBμV]	Limit (Ave.) [dBμV]	Margin (QP)[dB]	Margin (Ave.) [dB]
0.1592	34.8	20.7	10.0	44.8	30.7	VA	65.5	55.5	20.7	24.8
0.2070	42.4	28.7	10.0	52.4	38.7	VB	63.3	53.3	10.9	14.6
0.3151	34.5	28.5	10.0	44.5	38.5	VB	59.8	49.8	15.3	11.3
24.9024	32.4	26.0	11.0	43.4	37.0	VB	60.0	50.0	16.6	13.0