

\*\*\*\*\*<I P S Corporation>\*\*\*\*\*  
<<< RADIATED EMISSION >>>

18 April, 1997 17:39

Page 1

Model : COSEL LDA300W-12  
Serial No. : 001  
Standard : EN55022 Class B  
Condition File : 104  
Condition :  
Remarks : EUT NAME : POWER SUPPLY  
:  
: FILE No. : 001  
AC Power : 230 V 50 Hz  
Temperature : 19 deg.  
Humidity : 59 %  
Operator : T.YAMAGUCHI



\*\*\*\*\*  
----- Final Result -----

- Horizontal Polarization -

No.	Frequency [MHz]	Reading [dBuV]	c.f. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
1	51.652	26.6	-14.9	11.7	30.0	18.3
2	56.273	32.0	-16.3	15.7	30.0	14.3
3	64.019	30.3	-16.2	14.1	30.0	15.9
4	72.034	25.3	-15.7	9.6	30.0	20.4
5	90.123	26.1	-13.2	12.9	30.0	17.1
6	147.570	20.4	-9.6	10.8	30.0	19.2
7	173.830	20.8	-10.8	10.0	30.0	20.0

- Vertical Polarization -

No.	Frequency [MHz]	Reading [dBuV]	c.f. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
8	46.891	31.2	-12.7	18.5	30.0	11.5
9	51.137	36.5	-14.7	21.8	30.0	8.2
10	57.063	40.3	-16.3	24.0	30.0	6.0
11	59.501	39.5	-16.4	23.1	30.0	6.9
12	64.933	37.7	-16.2	21.5	30.0	8.5
13	89.856	30.9	-13.2	17.7	30.0	12.3
14	191.912	28.9	-10.9	18.0	30.0	12.0

&lt; I P S Corporation &gt;

&lt;&lt;&lt; RADIATED EMISSION &gt;&gt;&gt;

Date/Time : 18 April, 1997 17:39

I P S EMC SITE

Model : COSEL LDA300W-12


Standard : EN55022 Class B





Serial No. : 001





Operator : T. YAMAGUCHI





Remarks : EUT NAME : POWER SUPPLY





FILE No. : 001

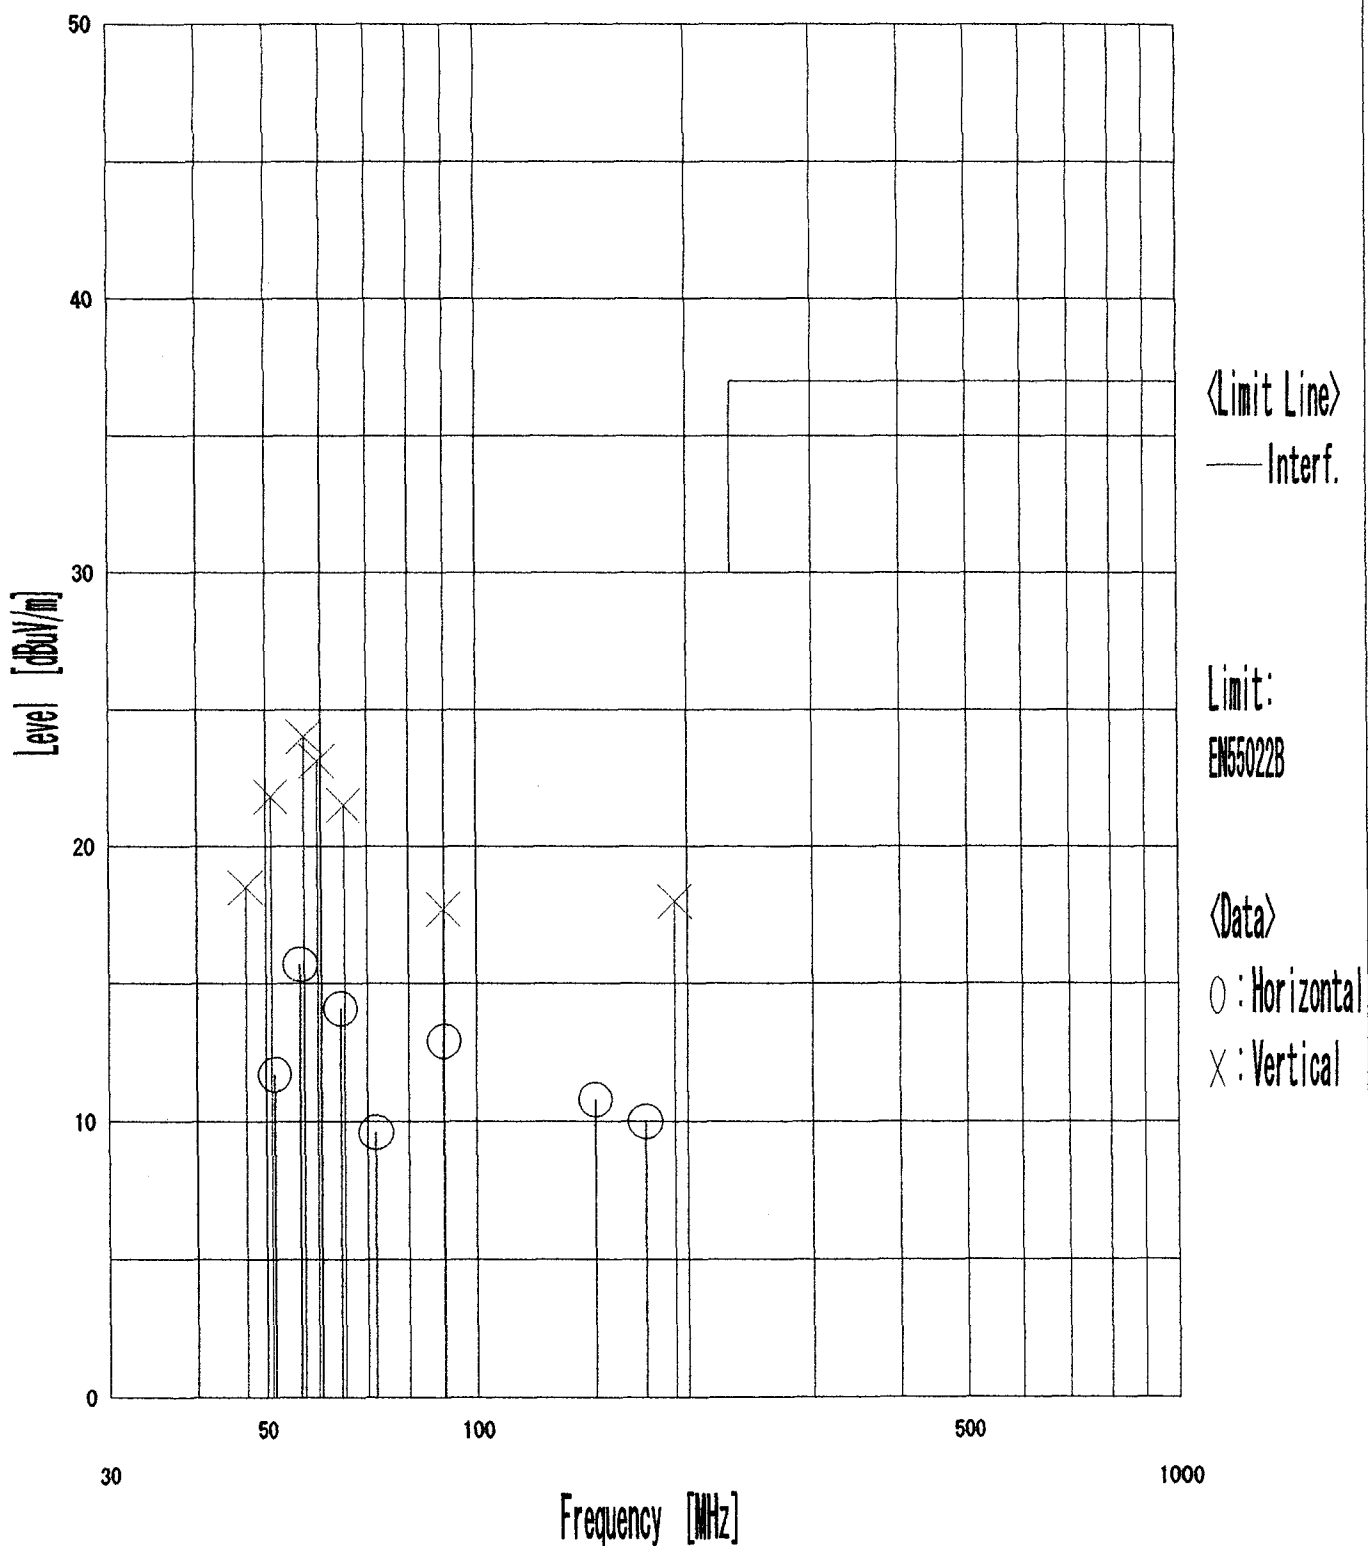

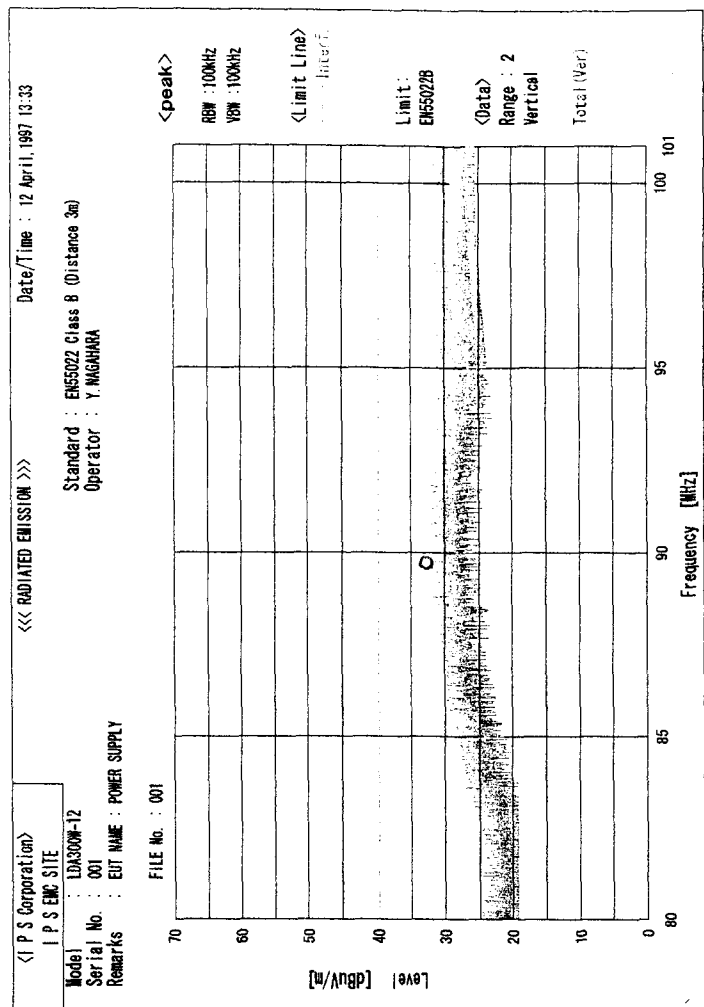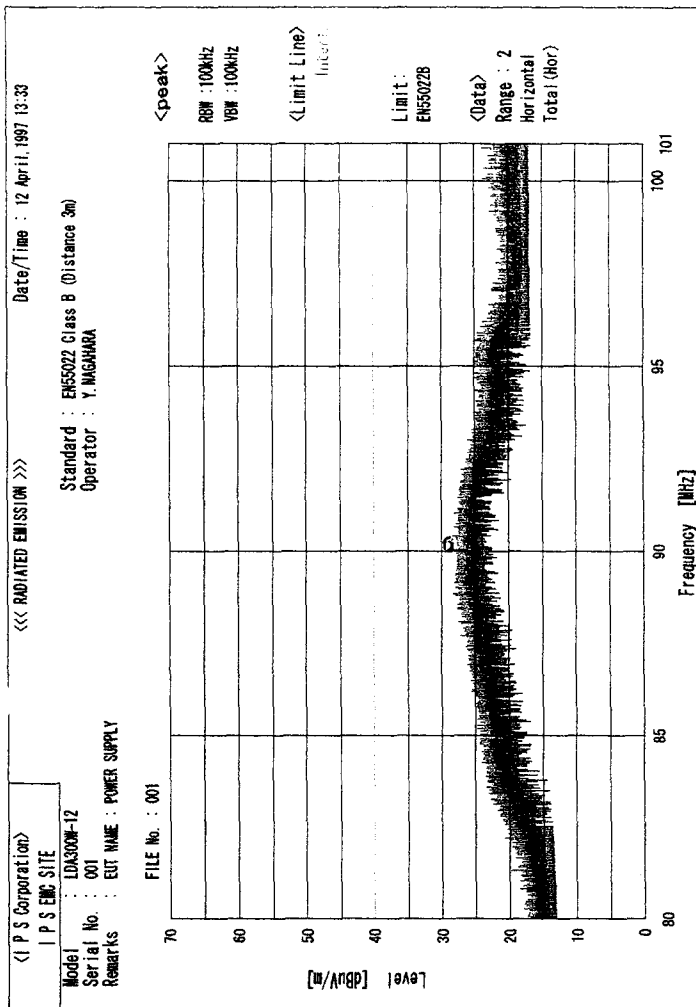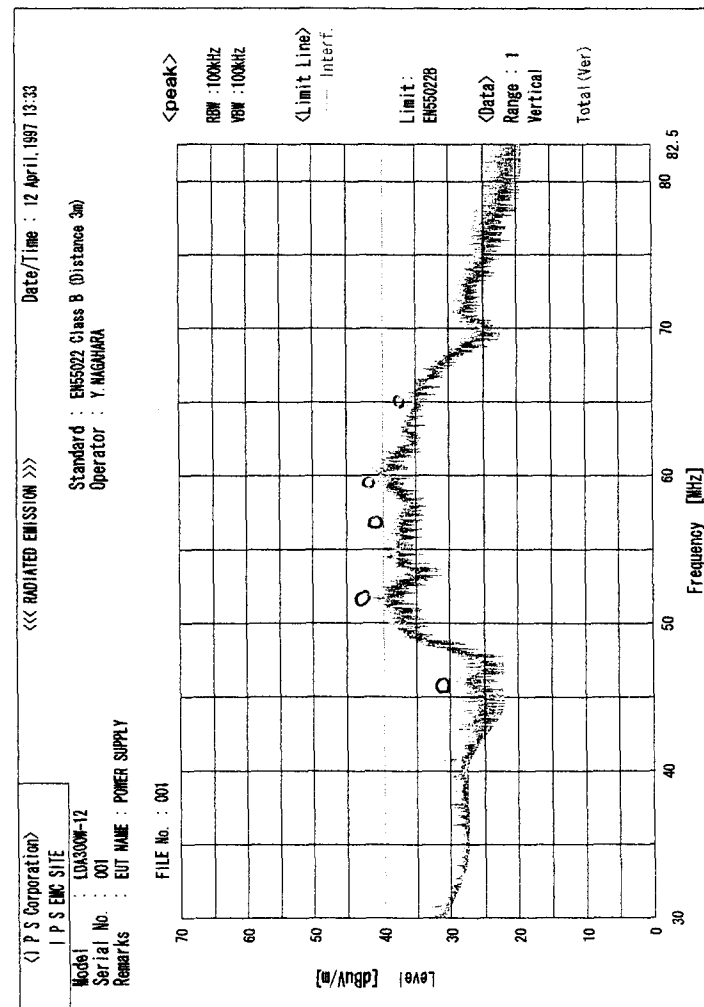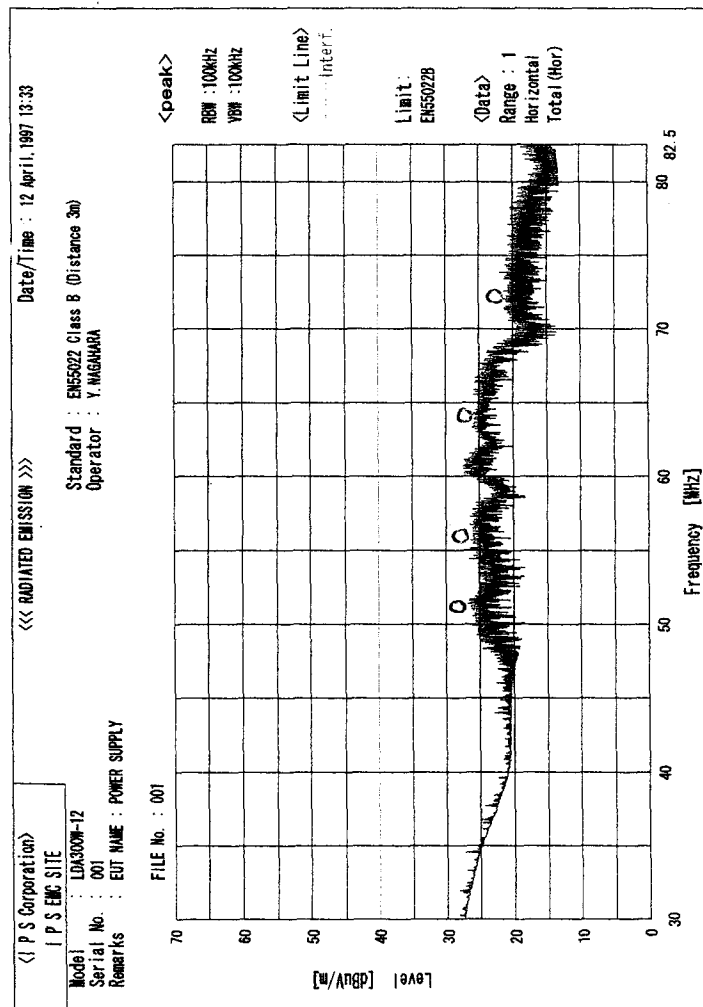

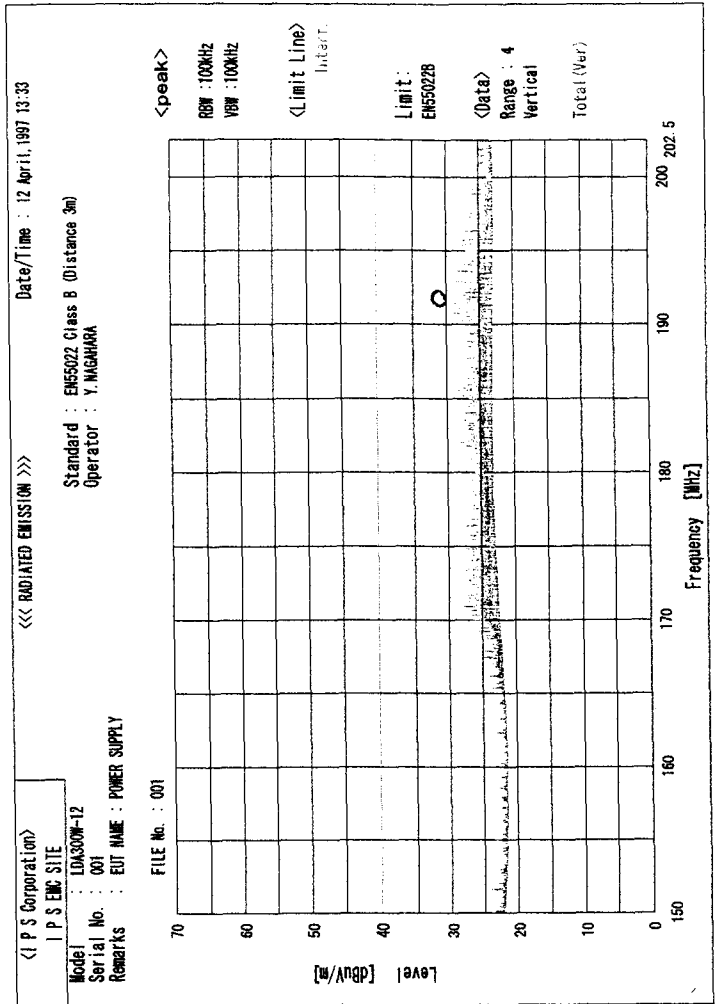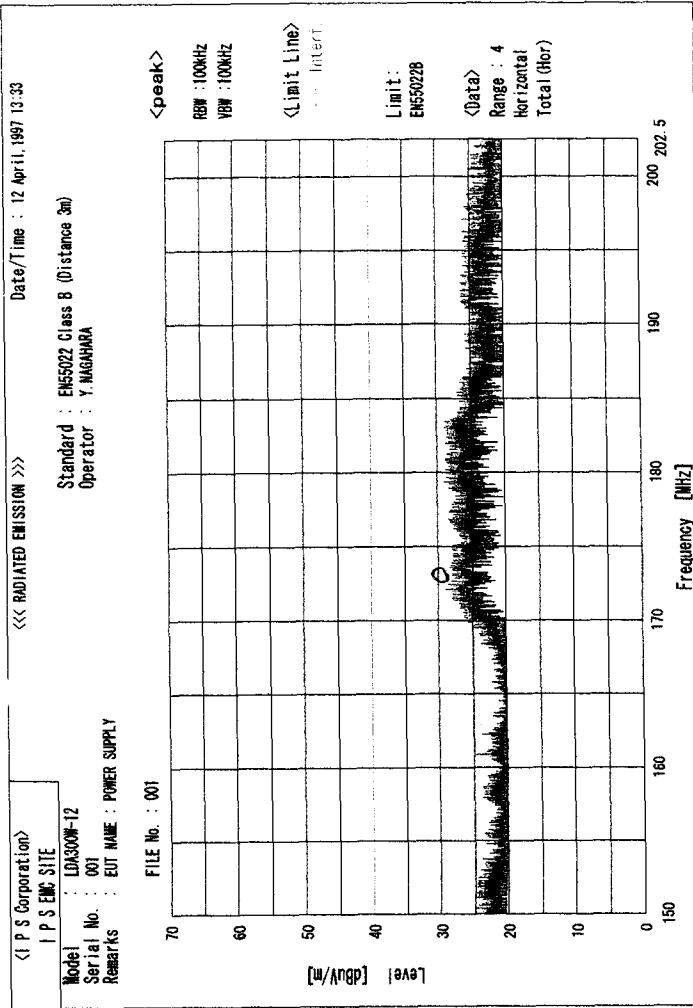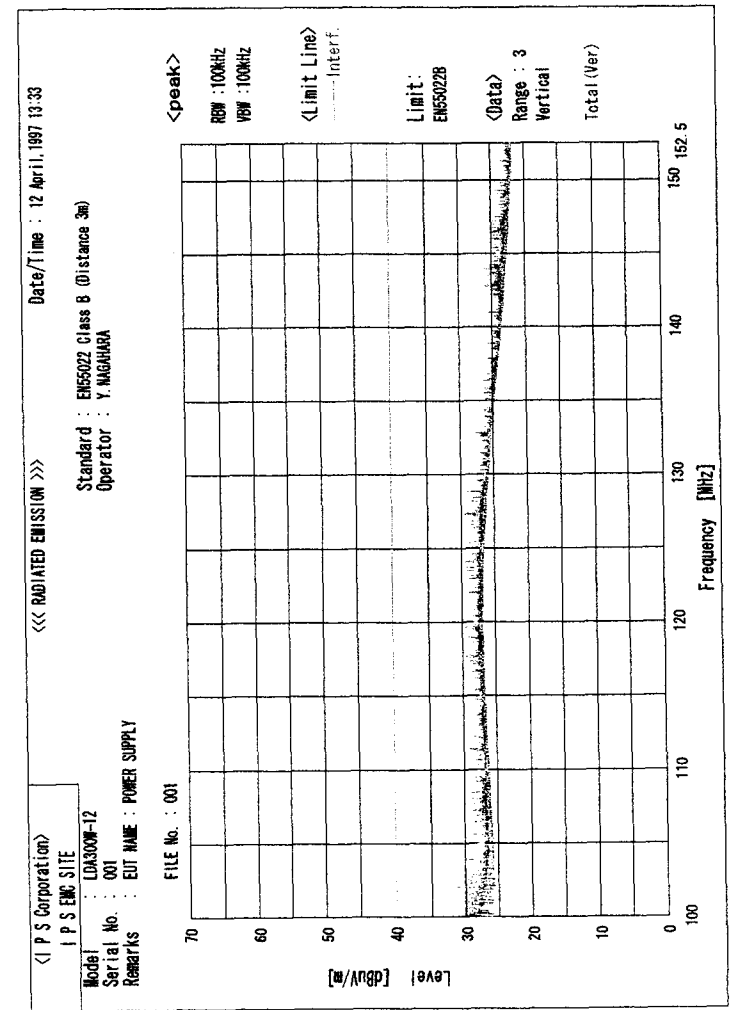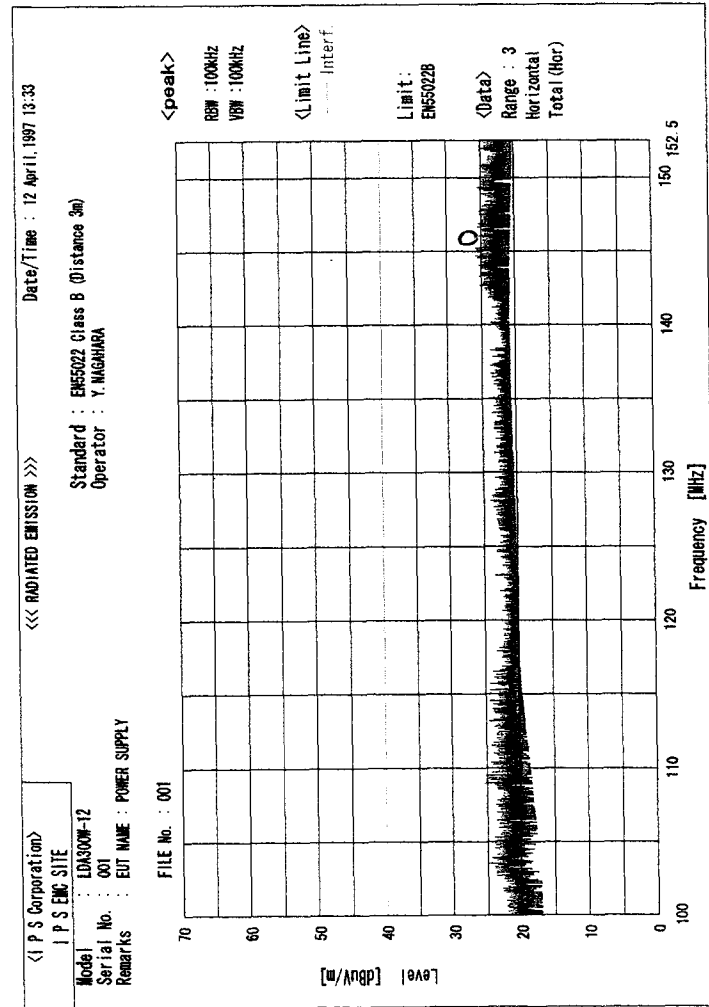

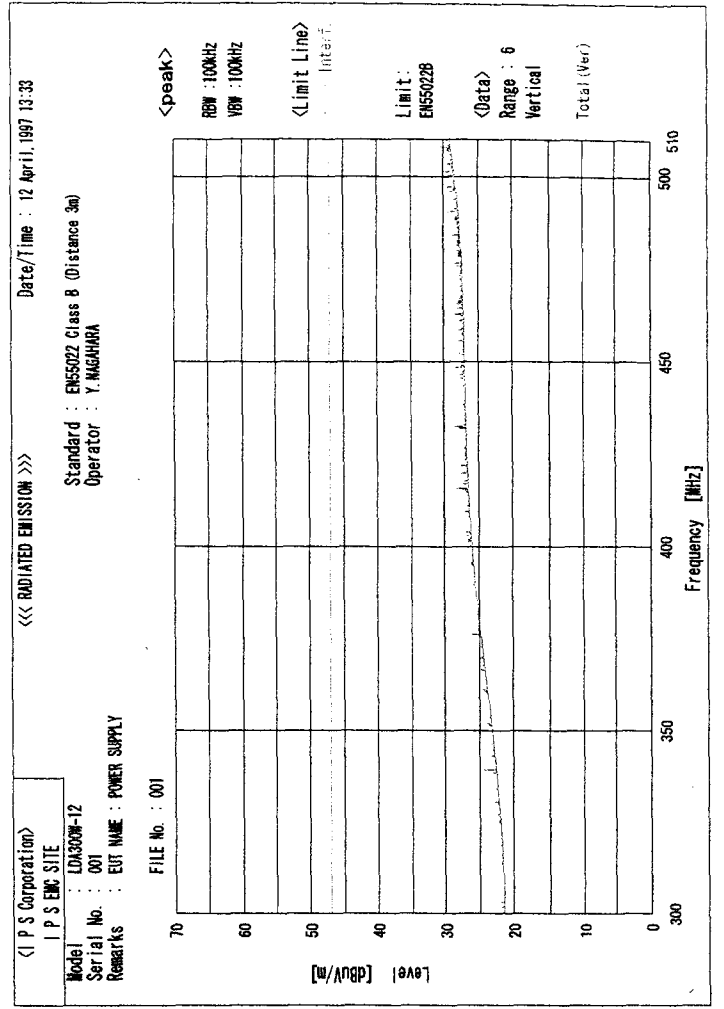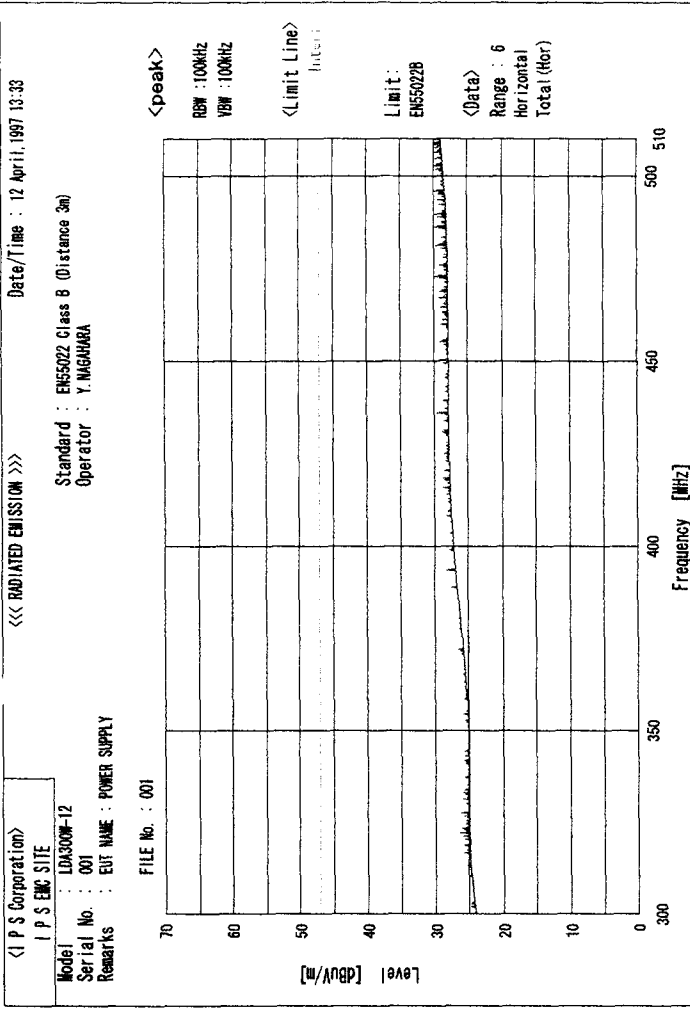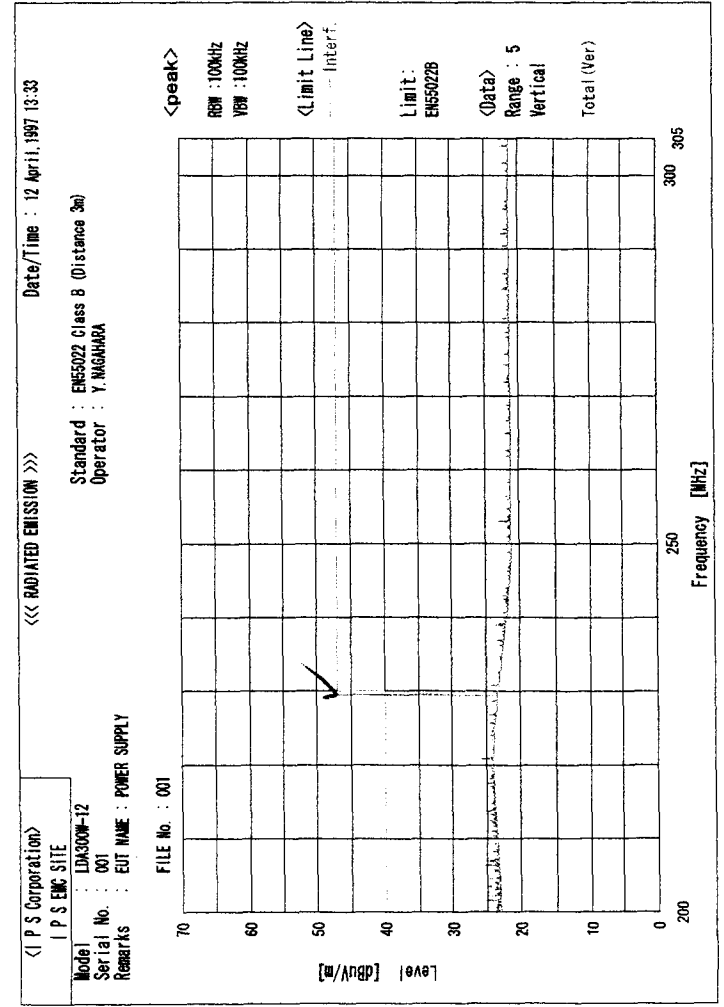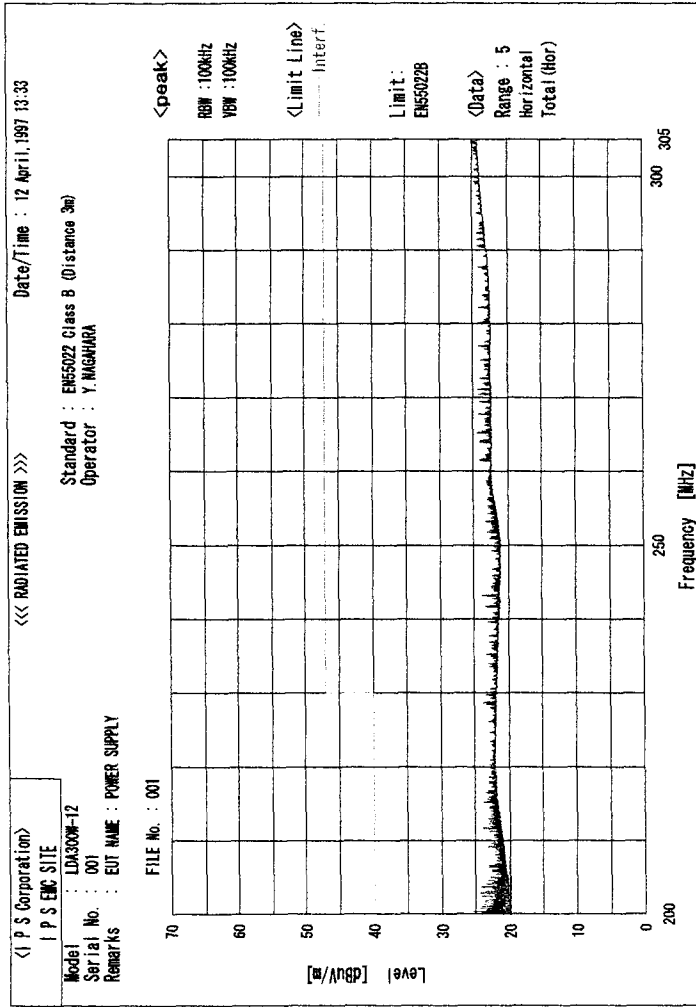

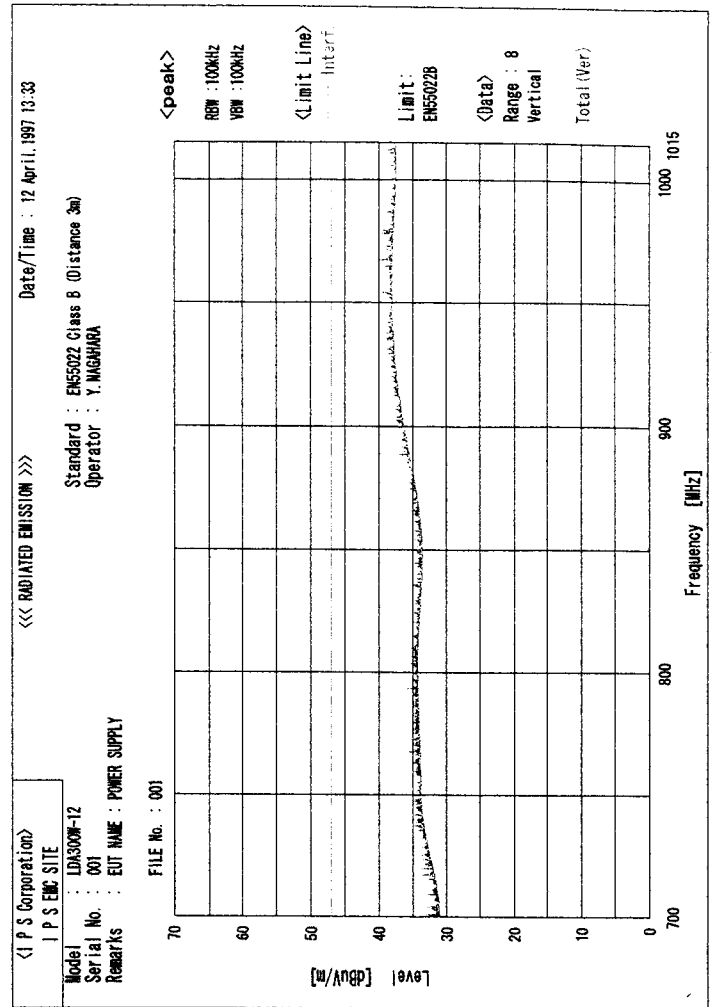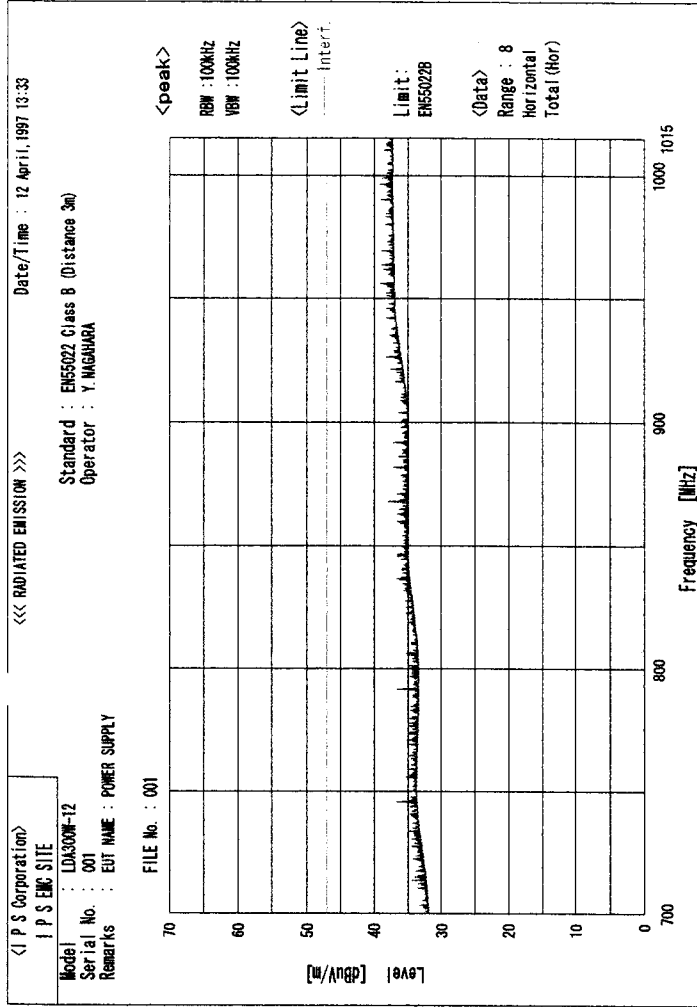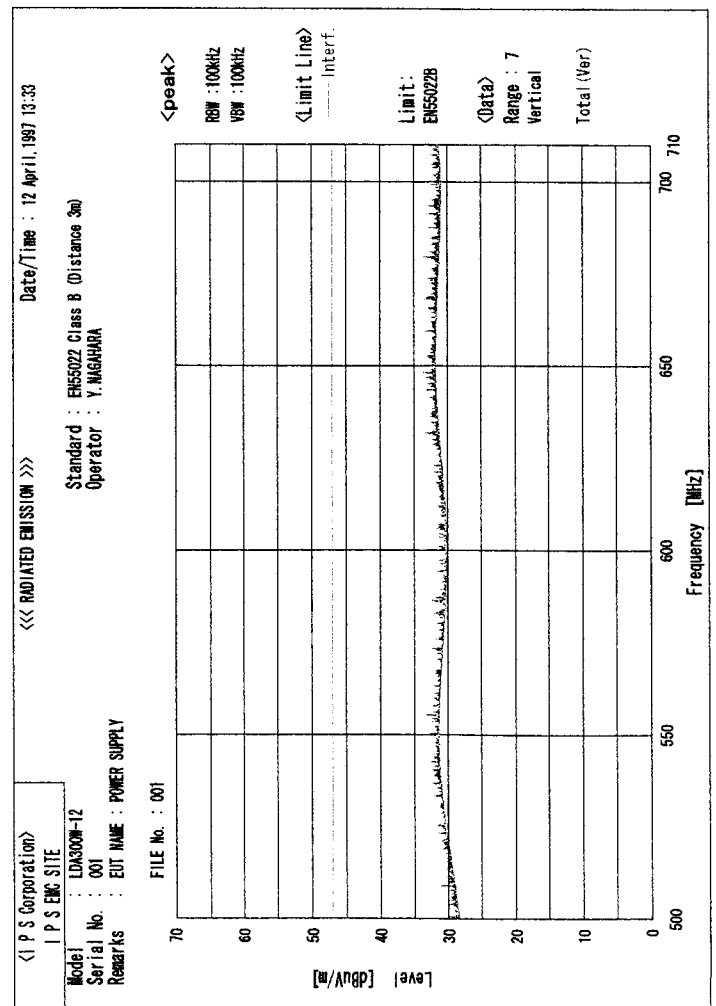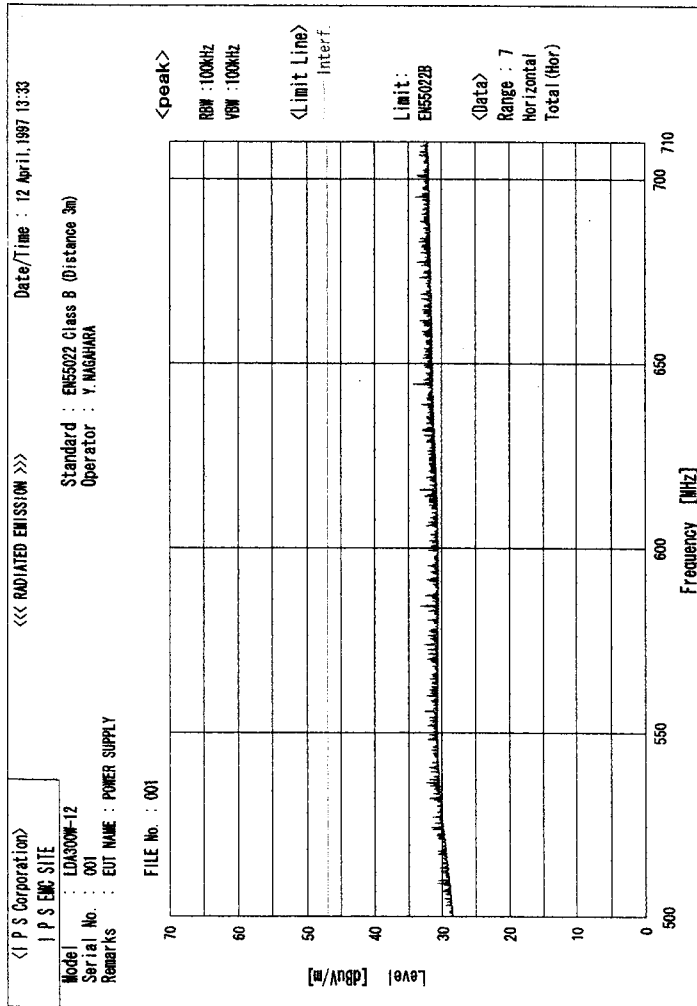

\*\*\*\*\* <I P S Corporation> \*\*\*\*\*  
 <<< CONDUCTED EMISSION >>>

18 April,1997 16:50  
 Page 1

Model : COSEL LDA300W-12  
 Serial No. : 001  
 Standard : EN55022 Class B  
 Condition File : 104  
 Remark :  
 : EUT NAME : POWER SUPPLY  
 :  
 : FILE No. : 001  
 AC Power : 230 V 50 Hz  
 Temperature : 23 deg.  
 Humidity : 42 %  
 Operator : T.YAMAGUCHI

\*\*\*\*\*

## ----- Results -----

No.	Frequency	Reading		c.f.	Result		Limit		Margin	
		QP	AV		QP	AV	QP	AV	QP	AV
	[MHz]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dB]	[dB]
Phase N										
1	0.15000	32.4		10.0	42.4		66.0	56.0	23.6	
2	0.25650	36.0		10.0	46.0		61.5	51.5	15.5	
3	0.64360	23.4		10.0	33.4		56.0	46.0	22.6	
4	1.41770	25.1		10.0	35.1		56.0	46.0	20.9	
5	2.32070	24.4		10.0	34.4		56.0	46.0	21.6	
6	18.57410	23.3		10.8	34.1		60.0	50.0	25.9	
Phase L1										
1	0.15000	32.6		10.0	42.6		66.0	56.0	23.4	
2	0.25720	30.7		10.0	40.7		61.5	51.5	20.8	
3	0.64470	25.2		10.0	35.2		56.0	46.0	20.8	
4	1.41840	26.9		10.0	36.9		56.0	46.0	19.1	
5	2.70800	26.0		10.0	36.0		56.0	46.0	20.0	
6	12.25430	20.2		10.5	30.7		60.0	50.0	29.3	

## <<< CONDUCTED EMISSION >>>


Date: 18 April, 1997

I P S EMC SITE

Model : COSEL LDA300W-12  
Serial No. : 001  
Remarks : EUT NAME : POWER SUPPLY

Standard : EN55022 Class B  
Operator : T. YAMAGUCHI

FILE No. : 001

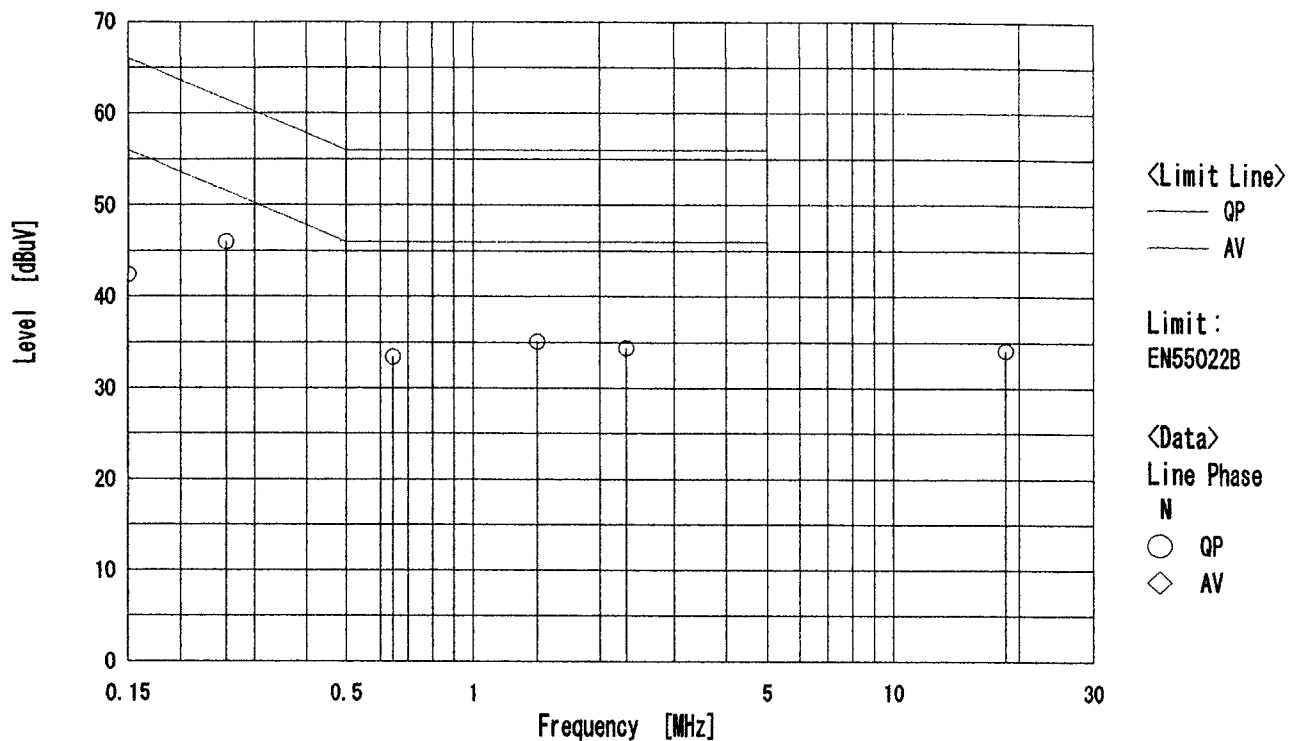

<I P S Corporation>  
I P S EMC SITE


## <<< CONDUCTED EMISSION >>>

Date: 18 April, 1997

Model : COSEL LDA300W-12  
Serial No. : 001  
Remarks : EUT NAME : POWER SUPPLY

Standard : EN55022 Class B  
Operator : T. YAMAGUCHI

FILE No. : 001

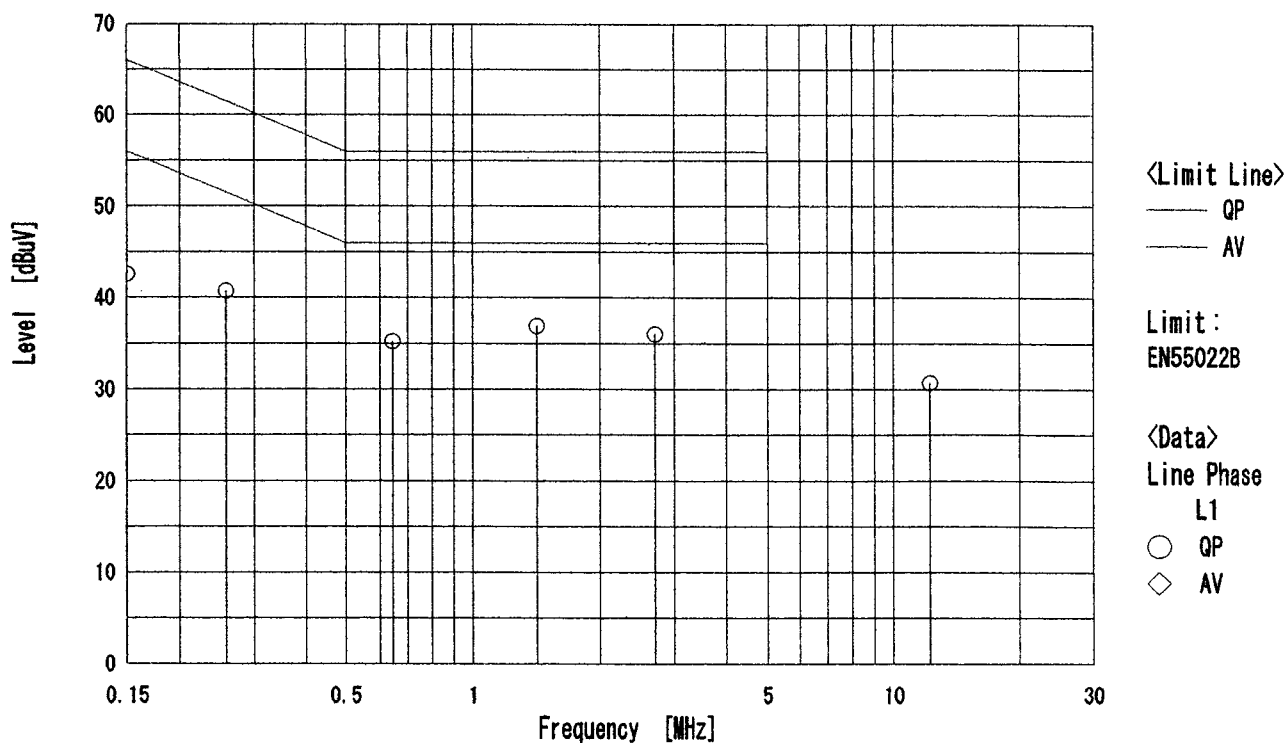




I P S EMC SITE

Model : COSEL LDA300W-12  
Serial No. : 001  
Remarks : EUT NAME : POWER SUPPLY

Standard : EN55022 Class B  
Operator : T.YAMAGUCHI

FILE No. : 001

<peak>

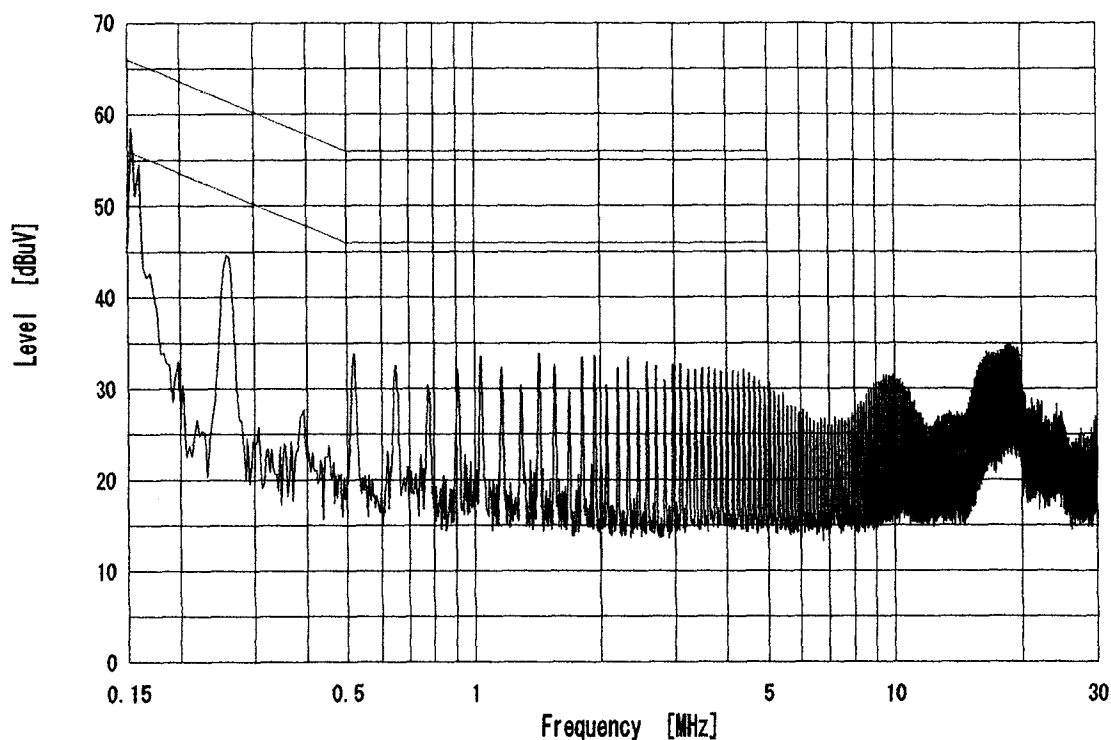

<I P S Corporation>

<<< CONDUCTED EMISSION >>>

Date/Time : 18 April, 1997 16:34

I P S EMC SITE

Model : COSEL LDA300W-12  
Serial No. : 001  
Remarks : EUT NAME : POWER SUPPLY

Standard : EN55022 Class B  
Operator : T.YAMAGUCHI

FILE No. : 001

<peak>

