



RADIATED EMISSION

Model Name : LDA300W-9

Model No. :

Serial No. :

Points : 3

Detector : PEAK/QP

Polarization : Hori. & Vert.

Limit: [CISPR 22] Class B<3m>

Power Supply : 230V(1 Phase) 50Hz


Temp. : 25degC

Humi. : 44%

Date : 2003/4/3 16:22

Test Equip. : R3132,ESPC

Comment :

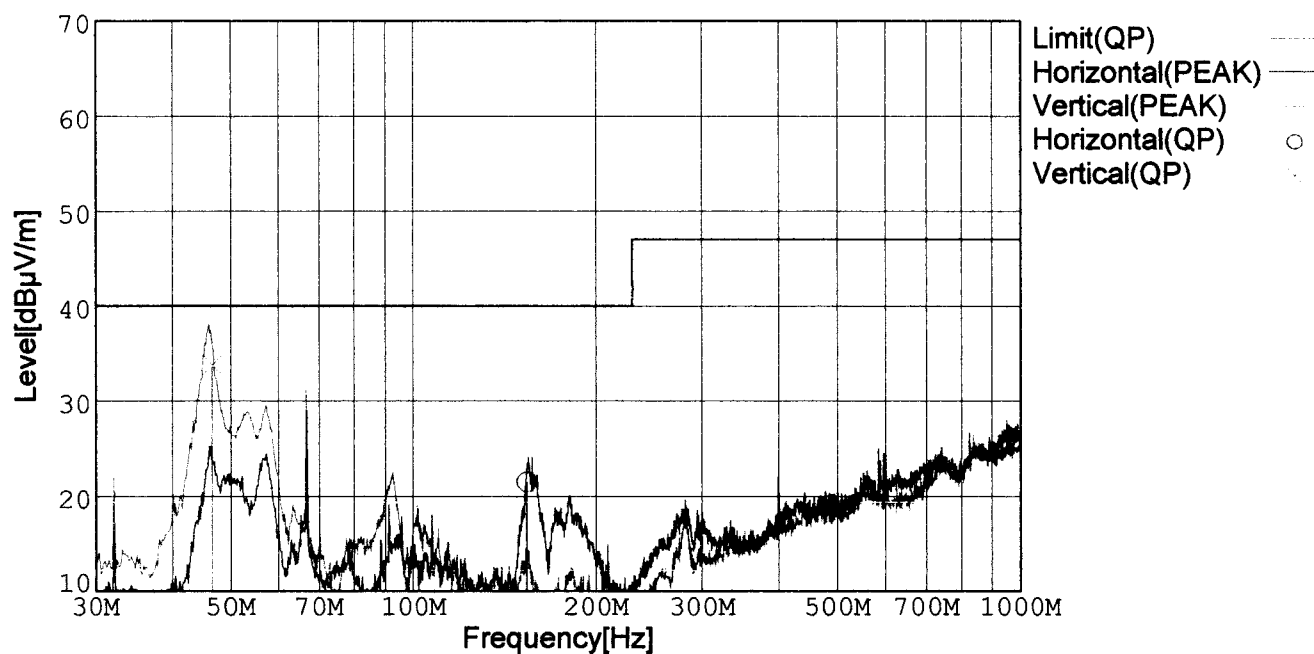

Frequency [MHz]	Meter Reading (QP) [dBμV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level (QP) [dBμV/m]	Angle[°]	Height [cm]	Polar.	Limit [dBμV/m]	Margin [dB]
154.288	35.7	BL	10.2	-24.4	21.5	356	153	Hori.	40.0	18.5
46.774	49.4	BL	8.8	-24.4	33.8	64	110	Vert.	40.0	6.2
67.033	28.2	BL	4.7	-23.2	9.7	61	129	Vert.	40.0	30.3

BL: Biconi-Log



LINE CONDUCTION

Model Name : LDA300W-9

Model No. :

Serial No. :

Points : 5

Detector : PEAK/QP/Ave.

Line Mode : VA/VB

Limit1: [CISPR Pub22] Class B(QP)

Limit2: [CISPR Pub22] Class B(Ave.)

Power Supply : 'P'S 230V 50Hz


Temp. : 25degC

Humi. : 44%

Date : 2003/3/31 16:21

Test Equip. : R3132,ESPC

Comment :

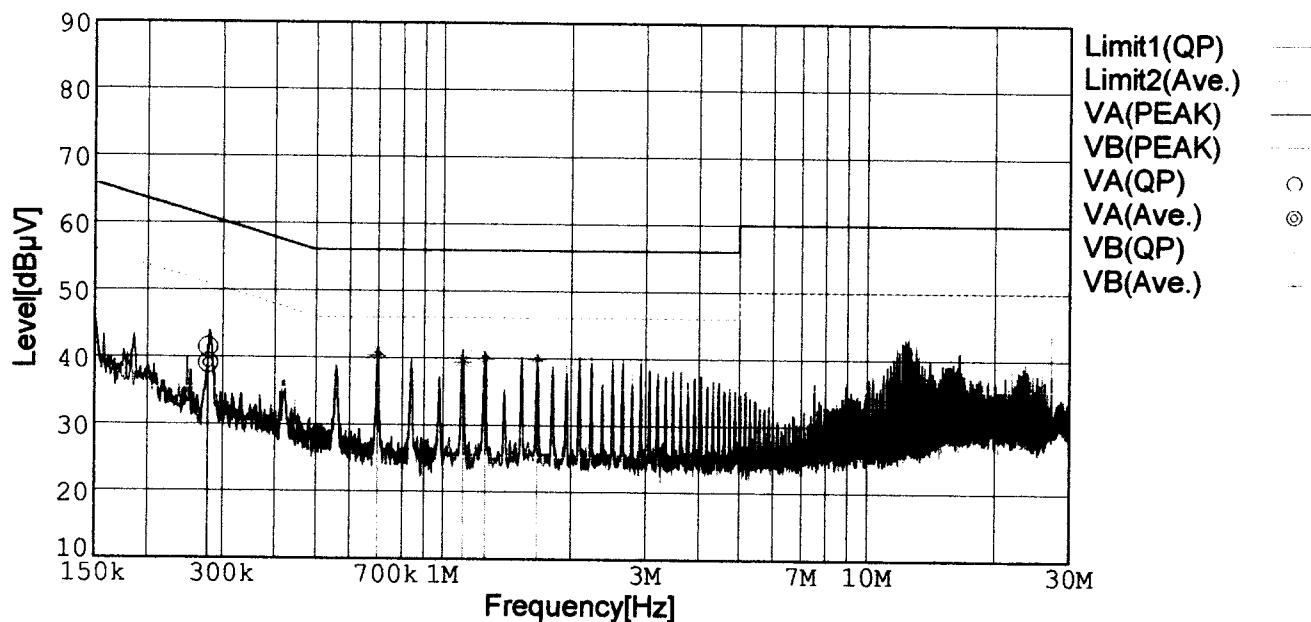

Frequency [MHz]	Meter Reading (QP) [dBμV]	Meter Reading (Ave.) [dBμV]	Factor [dB]	Level (QP) [dBμV]	Level (Ave.) [dBμV]	Line	Limit (QP) [dBμV]	Limit (Ave.) [dBμV]	Margin (QP)[dB]	Margin (Ave.) [dB]
0.2778	31.4	29.0	10.0	41.4	39.0	VA	60.9	50.9	19.5	11.9
0.6992	31.0	30.2	10.1	41.1	40.3	VB	56.0	46.0	14.9	5.7
1.1178	29.7	29.2	10.1	39.8	39.3	VB	56.0	46.0	16.2	6.7
1.2568	30.5	29.8	10.1	40.6	39.9	VB	56.0	46.0	15.4	6.1
1.6756	30.1	29.6	10.2	40.3	39.8	VB	56.0	46.0	15.7	6.2