



TEST DATA OF LDA50F-12

(100V INPUT)

Regulated DC Power Supply

Aug. 23, 1999

Approved by : M. Yamaguchi
Design Manager

Prepared by : T. Ashihara
Design Engineer

コーワセル株式会社
COSEL CO., LTD.



C O N T E N T S

1. Line Regulation	1
静的入力変動	
2. Input Current (by Load Current)	2
入力電流 (負荷特性)	
3. Input Power (by Load Current)	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage)	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current)	5
効率 (負荷特性)	
6. Hold-Up Time	6
出力保持時間	
7. Instantaneous Interruption Compensation	7
瞬時停電保障	
8. Load Regulation	8
静的負荷変動	
9. Ripple Voltage (by Load Current)	9
リップル電圧 (負荷特性)	
10. Ripple-Noise	10
リップルノイズ	
11. Overcurrent Protection	11
過電流保護	
12. Overvoltage Protection	12
過電圧保護	
13. Inrush Current	13
突入電流	
14. Dynamic Load Responce	14
動的負荷変動	
15. Rise and Fall Time	15
立上り、立下り時間	
16. Ambient Temperature Drift	16
周囲温度変動	
17. Minimum Input Voltage for Regulated Output Voltage	17
最低レギュレーション電圧	
18. Ripple Voltage (by Ambient Temperature)	18
リップル電圧 (周囲温度特性)	
19. Time Lapse Drift	19
経時ドリフト	
20. Output Voltage Accuracy	20
定電圧精度	
21. Condensation	21
結露特性	
22. Leakage Current	22
漏洩電流	
23. Line Noise Tolerance	23
入力雑音耐量	
24. Conducted Emission	24
雑音端子電圧	
25. Figure of Testing Circuitry	25
測定回路図	

(Final Page 26)

COSSEL

Model	LDA50F-12		Temperature Testing Circuitry	25°C Figure A																																
Item	Line Regulation 静的入力変動																																			
Object	+12.0V 4.3A																																			
1. Graph	<p>Load 50% □</p> <p>Load 100% △</p>																																			
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>75</td><td>12.151</td><td>12.145</td></tr> <tr><td>80</td><td>12.151</td><td>12.145</td></tr> <tr><td>85</td><td>12.150</td><td>12.145</td></tr> <tr><td>90</td><td>12.150</td><td>12.145</td></tr> <tr><td>100</td><td>12.150</td><td>12.145</td></tr> <tr><td>110</td><td>12.150</td><td>12.145</td></tr> <tr><td>120</td><td>12.150</td><td>12.145</td></tr> <tr><td>132</td><td>12.150</td><td>12.145</td></tr> <tr><td>140</td><td>12.150</td><td>12.145</td></tr> </tbody> </table>				Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	75	12.151	12.145	80	12.151	12.145	85	12.150	12.145	90	12.150	12.145	100	12.150	12.145	110	12.150	12.145	120	12.150	12.145	132	12.150	12.145	140	12.150	12.145
Input Voltage [V]	Output Voltage [V]																																			
	Load 50%	Load 100%																																		
75	12.151	12.145																																		
80	12.151	12.145																																		
85	12.150	12.145																																		
90	12.150	12.145																																		
100	12.150	12.145																																		
110	12.150	12.145																																		
120	12.150	12.145																																		
132	12.150	12.145																																		
140	12.150	12.145																																		

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

COSEL

Model	LDA50F-12																																																									
Item	Input Current (by Load Current) 入力電流（負荷特性）	Temperature Testing Circuitry	25°C Figure A																																																							
Output	_____																																																									
1. Graph	<p>Legend:</p> <ul style="list-style-type: none"> △ Input Volt. 85V □ Input Volt. 100V ○ Input Volt. 132V 																																																									
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.049</td><td>0.050</td><td>0.053</td></tr> <tr><td>0.80</td><td>0.279</td><td>0.251</td><td>0.216</td></tr> <tr><td>1.60</td><td>0.490</td><td>0.434</td><td>0.360</td></tr> <tr><td>2.40</td><td>0.711</td><td>0.627</td><td>0.511</td></tr> <tr><td>3.20</td><td>0.938</td><td>0.824</td><td>0.666</td></tr> <tr><td>4.00</td><td>1.163</td><td>1.020</td><td>0.821</td></tr> <tr><td>4.30</td><td>1.252</td><td>1.097</td><td>0.884</td></tr> <tr><td>4.73</td><td>1.375</td><td>1.204</td><td>0.968</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Current [A]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	0.049	0.050	0.053	0.80	0.279	0.251	0.216	1.60	0.490	0.434	0.360	2.40	0.711	0.627	0.511	3.20	0.938	0.824	0.666	4.00	1.163	1.020	0.821	4.30	1.252	1.097	0.884	4.73	1.375	1.204	0.968	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Current [A]																																																									
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																							
0.00	0.049	0.050	0.053																																																							
0.80	0.279	0.251	0.216																																																							
1.60	0.490	0.434	0.360																																																							
2.40	0.711	0.627	0.511																																																							
3.20	0.938	0.824	0.666																																																							
4.00	1.163	1.020	0.821																																																							
4.30	1.252	1.097	0.884																																																							
4.73	1.375	1.204	0.968																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							

Note: Slanted line shows the range of the rated load current


(注)斜線は定格負荷電流範囲を示す。

COSEL

Model	LDA50F-12	Temperature	25°C																																																							
Item	Input Power (by Load Current) 入力電力（負荷特性）	Testing Circuitry	Figure A																																																							
Output	_____																																																									
1. Graph	<p>Legend:</p> <ul style="list-style-type: none"> Input Volt. 85V (△) Input Volt. 100V (□) Input Volt. 132V (○) <table border="1"> <thead> <tr> <th>Load Current [A]</th> <th>Input Volt. 85[V] [W]</th> <th>Input Volt. 100[V] [W]</th> <th>Input Volt. 132[V] [W]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>1.60</td><td>1.85</td><td>2.47</td></tr> <tr><td>0.80</td><td>13.53</td><td>13.59</td><td>14.42</td></tr> <tr><td>1.60</td><td>24.94</td><td>25.01</td><td>25.63</td></tr> <tr><td>2.40</td><td>36.63</td><td>36.61</td><td>37.04</td></tr> <tr><td>3.20</td><td>48.66</td><td>48.47</td><td>48.60</td></tr> <tr><td>4.00</td><td>60.78</td><td>60.37</td><td>60.30</td></tr> <tr><td>4.30</td><td>65.47</td><td>64.97</td><td>64.80</td></tr> <tr><td>4.73</td><td>72.28</td><td>71.63</td><td>71.20</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Volt. 85[V] [W]	Input Volt. 100[V] [W]	Input Volt. 132[V] [W]	0.00	1.60	1.85	2.47	0.80	13.53	13.59	14.42	1.60	24.94	25.01	25.63	2.40	36.63	36.61	37.04	3.20	48.66	48.47	48.60	4.00	60.78	60.37	60.30	4.30	65.47	64.97	64.80	4.73	72.28	71.63	71.20	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
Load Current [A]	Input Volt. 85[V] [W]	Input Volt. 100[V] [W]	Input Volt. 132[V] [W]																																																							
0.00	1.60	1.85	2.47																																																							
0.80	13.53	13.59	14.42																																																							
1.60	24.94	25.01	25.63																																																							
2.40	36.63	36.61	37.04																																																							
3.20	48.66	48.47	48.60																																																							
4.00	60.78	60.37	60.30																																																							
4.30	65.47	64.97	64.80																																																							
4.73	72.28	71.63	71.20																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>1.60</td><td>1.85</td><td>2.47</td></tr> <tr><td>0.80</td><td>13.53</td><td>13.59</td><td>14.42</td></tr> <tr><td>1.60</td><td>24.94</td><td>25.01</td><td>25.63</td></tr> <tr><td>2.40</td><td>36.63</td><td>36.61</td><td>37.04</td></tr> <tr><td>3.20</td><td>48.66</td><td>48.47</td><td>48.60</td></tr> <tr><td>4.00</td><td>60.78</td><td>60.37</td><td>60.30</td></tr> <tr><td>4.30</td><td>65.47</td><td>64.97</td><td>64.80</td></tr> <tr><td>4.73</td><td>72.28</td><td>71.63</td><td>71.20</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Power [W]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	1.60	1.85	2.47	0.80	13.53	13.59	14.42	1.60	24.94	25.01	25.63	2.40	36.63	36.61	37.04	3.20	48.66	48.47	48.60	4.00	60.78	60.37	60.30	4.30	65.47	64.97	64.80	4.73	72.28	71.63	71.20	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Power [W]																																																									
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																							
0.00	1.60	1.85	2.47																																																							
0.80	13.53	13.59	14.42																																																							
1.60	24.94	25.01	25.63																																																							
2.40	36.63	36.61	37.04																																																							
3.20	48.66	48.47	48.60																																																							
4.00	60.78	60.37	60.30																																																							
4.30	65.47	64.97	64.80																																																							
4.73	72.28	71.63	71.20																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。

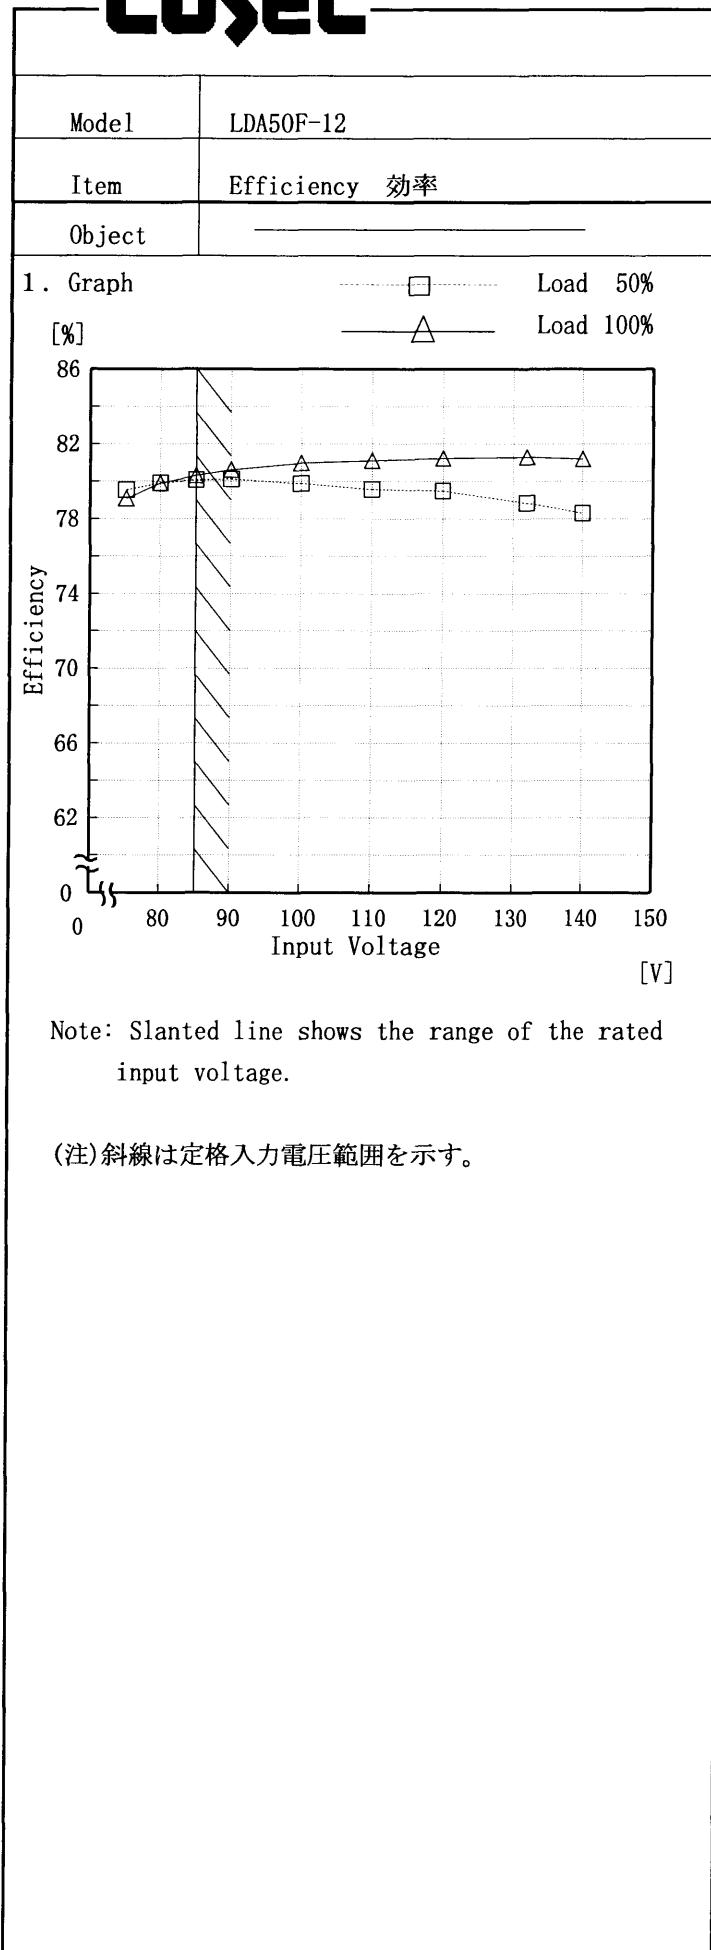COSEL

Temperature 25°C
Testing Circuitry Figure A

2. Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
75	79.5	79.1
80	79.9	79.9
85	80.1	80.3
90	80.1	80.6
100	79.9	81.0
110	79.6	81.1
120	79.5	81.2
132	78.8	81.3
140	78.3	81.2

COSEL

Model	LDA50F-12	Temperature	25°C																																																							
Item	Efficiency (by Load Current) 効率(負荷特性)	Testing Circuitry	Figure A																																																							
Output	_____																																																									
1. Graph	<p>The graph plots Efficiency [%] on the Y-axis (0 to 90) against Load Current [A] on the X-axis (0 to 5). Three data series are shown: Input Volt. 85V (triangles), Input Volt. 100V (squares), and Input Volt. 132V (circles). All three series show efficiency increasing with load current. A slanted line is drawn across the graph, starting from approximately (0.8, 72) and ending at (4.73, 80), indicating the range of the rated load current.</p>																																																									
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>0.80</td><td>72.9</td><td>72.1</td><td>68.2</td></tr> <tr><td>1.60</td><td>78.3</td><td>78.3</td><td>76.4</td></tr> <tr><td>2.40</td><td>80.2</td><td>80.3</td><td>79.1</td></tr> <tr><td>3.20</td><td>80.3</td><td>80.7</td><td>80.6</td></tr> <tr><td>4.00</td><td>80.3</td><td>80.9</td><td>80.9</td></tr> <tr><td>4.30</td><td>80.2</td><td>80.8</td><td>81.0</td></tr> <tr><td>4.73</td><td>80.0</td><td>80.7</td><td>81.2</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Efficiency [%]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.80	72.9	72.1	68.2	1.60	78.3	78.3	76.4	2.40	80.2	80.3	79.1	3.20	80.3	80.7	80.6	4.00	80.3	80.9	80.9	4.30	80.2	80.8	81.0	4.73	80.0	80.7	81.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Efficiency [%]																																																									
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																							
0.80	72.9	72.1	68.2																																																							
1.60	78.3	78.3	76.4																																																							
2.40	80.2	80.3	79.1																																																							
3.20	80.3	80.7	80.6																																																							
4.00	80.3	80.9	80.9																																																							
4.30	80.2	80.8	81.0																																																							
4.73	80.0	80.7	81.2																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。



Model	LDA50F-12	Temperature Testing Circuitry	25°C Figure A																																
Item	Hold-Up Time 出力保持時間																																		
Object	+12.0V 4.3A																																		
1. Graph	<p style="text-align: center;">□ Load 50% △ Load 100%</p>																																		
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Hold-Up Time [ms]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>75</td><td>19</td><td>9</td></tr> <tr><td>80</td><td>23</td><td>11</td></tr> <tr><td>85</td><td>28</td><td>14</td></tr> <tr><td>90</td><td>34</td><td>17</td></tr> <tr><td>100</td><td>45</td><td>23</td></tr> <tr><td>110</td><td>58</td><td>30</td></tr> <tr><td>120</td><td>73</td><td>38</td></tr> <tr><td>132</td><td>92</td><td>48</td></tr> <tr><td>140</td><td>105</td><td>55</td></tr> </tbody> </table>			Input Voltage [V]	Hold-Up Time [ms]		Load 50%	Load 100%	75	19	9	80	23	11	85	28	14	90	34	17	100	45	23	110	58	30	120	73	38	132	92	48	140	105	55
Input Voltage [V]	Hold-Up Time [ms]																																		
	Load 50%	Load 100%																																	
75	19	9																																	
80	23	11																																	
85	28	14																																	
90	34	17																																	
100	45	23																																	
110	58	30																																	
120	73	38																																	
132	92	48																																	
140	105	55																																	

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated input voltage.

出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。

(注)斜線は定格入力電圧範囲を示す。

COSEL

Model	LDA50F-12	Temperature Testing Circuitry	25°C Figure A																																																			
Item	Instantaneous Interruption Compensation 瞬時停電保障																																																					
Object	+12.0V 4.3A																																																					
1. Graph	<p>—△— Input Volt. 85 V —□— Input Volt. 100 V —○— Input Volt. 132 V</p>																																																					
2. Values																																																						
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Time [mS]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>0.80</td><td>73</td><td>120</td><td>240</td></tr> <tr><td>1.60</td><td>38</td><td>63</td><td>130</td></tr> <tr><td>2.40</td><td>22</td><td>39</td><td>86</td></tr> <tr><td>3.20</td><td>14</td><td>30</td><td>65</td></tr> <tr><td>4.00</td><td>13</td><td>22</td><td>51</td></tr> <tr><td>4.30</td><td>12</td><td>21</td><td>47</td></tr> <tr><td>4.73</td><td>10</td><td>19</td><td>43</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Load Current [A]	Time [mS]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	—	—	—	0.80	73	120	240	1.60	38	63	130	2.40	22	39	86	3.20	14	30	65	4.00	13	22	51	4.30	12	21	47	4.73	10	19	43	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Time [mS]																																																					
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																			
0.00	—	—	—																																																			
0.80	73	120	240																																																			
1.60	38	63	130																																																			
2.40	22	39	86																																																			
3.20	14	30	65																																																			
4.00	13	22	51																																																			
4.30	12	21	47																																																			
4.73	10	19	43																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated load current.

瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。

(注)斜線は定格負荷電流範囲を示す。

COSEL

Model	LDA50F-12	Temperature Testing Circuitry	25°C Figure A																																																
Item	Load Regulation 静的負荷変動																																																		
Object	+12.0V 4.3A																																																		
1. Graph	<p>—△— Input Volt. 85 V —□— Input Volt. 100 V —○— Input Volt. 132 V</p> <table border="1"> <caption>Data points estimated from Figure A graph</caption> <thead> <tr> <th>Load Current [A]</th> <th>Output Voltage 85V [V]</th> <th>Output Voltage 100V [V]</th> <th>Output Voltage 132V [V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>12.152</td><td>12.152</td><td>12.152</td></tr> <tr><td>0.80</td><td>12.150</td><td>12.150</td><td>12.150</td></tr> <tr><td>1.60</td><td>12.148</td><td>12.148</td><td>12.148</td></tr> <tr><td>2.40</td><td>12.147</td><td>12.147</td><td>12.147</td></tr> <tr><td>3.20</td><td>12.145</td><td>12.145</td><td>12.145</td></tr> <tr><td>4.00</td><td>12.143</td><td>12.143</td><td>12.144</td></tr> <tr><td>4.30</td><td>12.143</td><td>12.143</td><td>12.143</td></tr> <tr><td>4.73</td><td>12.142</td><td>12.142</td><td>12.142</td></tr> </tbody> </table>				Load Current [A]	Output Voltage 85V [V]	Output Voltage 100V [V]	Output Voltage 132V [V]	0.00	12.152	12.152	12.152	0.80	12.150	12.150	12.150	1.60	12.148	12.148	12.148	2.40	12.147	12.147	12.147	3.20	12.145	12.145	12.145	4.00	12.143	12.143	12.144	4.30	12.143	12.143	12.143	4.73	12.142	12.142	12.142											
Load Current [A]	Output Voltage 85V [V]	Output Voltage 100V [V]	Output Voltage 132V [V]																																																
0.00	12.152	12.152	12.152																																																
0.80	12.150	12.150	12.150																																																
1.60	12.148	12.148	12.148																																																
2.40	12.147	12.147	12.147																																																
3.20	12.145	12.145	12.145																																																
4.00	12.143	12.143	12.144																																																
4.30	12.143	12.143	12.143																																																
4.73	12.142	12.142	12.142																																																
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>12.152</td><td>12.152</td><td>12.152</td></tr> <tr><td>0.80</td><td>12.150</td><td>12.150</td><td>12.150</td></tr> <tr><td>1.60</td><td>12.148</td><td>12.148</td><td>12.148</td></tr> <tr><td>2.40</td><td>12.147</td><td>12.147</td><td>12.147</td></tr> <tr><td>3.20</td><td>12.145</td><td>12.145</td><td>12.145</td></tr> <tr><td>4.00</td><td>12.143</td><td>12.143</td><td>12.144</td></tr> <tr><td>4.30</td><td>12.143</td><td>12.143</td><td>12.143</td></tr> <tr><td>4.73</td><td>12.142</td><td>12.142</td><td>12.142</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Load Current [A]	Output Voltage [V]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	12.152	12.152	12.152	0.80	12.150	12.150	12.150	1.60	12.148	12.148	12.148	2.40	12.147	12.147	12.147	3.20	12.145	12.145	12.145	4.00	12.143	12.143	12.144	4.30	12.143	12.143	12.143	4.73	12.142	12.142	12.142	—	—	—	—	—	—	—	—
Load Current [A]	Output Voltage [V]																																																		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																
0.00	12.152	12.152	12.152																																																
0.80	12.150	12.150	12.150																																																
1.60	12.148	12.148	12.148																																																
2.40	12.147	12.147	12.147																																																
3.20	12.145	12.145	12.145																																																
4.00	12.143	12.143	12.144																																																
4.30	12.143	12.143	12.143																																																
4.73	12.142	12.142	12.142																																																
—	—	—	—																																																
—	—	—	—																																																


Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

COSEL

Model	LDA50F-12	Temperature Testing Circuitry	25°C Figure A																																			
Item	Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)																																					
Object	+12.0V4.3A	2.Values																																				
1. Graph																																						
<p>[mV] □ Input Volt. 85V —△— Input Volt. 132V</p> <table border="1"> <caption>Data points estimated from Figure 1</caption> <thead> <tr> <th>Load Current [A]</th> <th>Ripple Output Volt. 85V [mV]</th> <th>Ripple Output Volt. 132V [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>10</td><td>10</td></tr> <tr><td>0.50</td><td>20</td><td>20</td></tr> <tr><td>1.00</td><td>25</td><td>25</td></tr> <tr><td>1.50</td><td>25</td><td>25</td></tr> <tr><td>2.00</td><td>25</td><td>25</td></tr> <tr><td>2.50</td><td>30</td><td>30</td></tr> <tr><td>3.00</td><td>30</td><td>30</td></tr> <tr><td>3.50</td><td>35</td><td>30</td></tr> <tr><td>4.30</td><td>40</td><td>30</td></tr> <tr><td>4.70</td><td>40</td><td>30</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Ripple Output Volt. 85V [mV]	Ripple Output Volt. 132V [mV]	0.00	10	10	0.50	20	20	1.00	25	25	1.50	25	25	2.00	25	25	2.50	30	30	3.00	30	30	3.50	35	30	4.30	40	30	4.70	40	30	—	—	—
Load Current [A]	Ripple Output Volt. 85V [mV]	Ripple Output Volt. 132V [mV]																																				
0.00	10	10																																				
0.50	20	20																																				
1.00	25	25																																				
1.50	25	25																																				
2.00	25	25																																				
2.50	30	30																																				
3.00	30	30																																				
3.50	35	30																																				
4.30	40	30																																				
4.70	40	30																																				
—	—	—																																				
Ripple Voltage is shown as p-p in the figure below.																																						
Note: Slanted line shows the range of the rated load current.																																						
リップル電圧は、下図 p - p 値で示される。 (注)斜線は定格負荷電流範囲を示す。																																						
<p>T1: Due to AC Input Line T2: Due to Switching</p>																																						
<p>Ripple [mVp-p]</p>																																						
<p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																						

COSEL

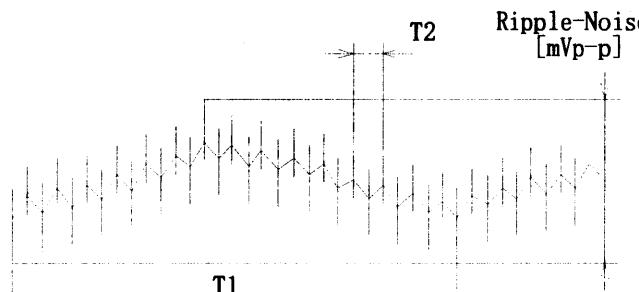Model	LDA50F-12	Temperature Testing Circuitry 25°C Figure A																																						
Item	Ripple-Noise リップルノイズ																																							
Object	+12.0V 4.3A																																							
1. Graph																																								
<p>Graph showing Ripple-Noise [mV] vs Load Current [A]. The Y-axis ranges from 0 to 200 mV, and the X-axis ranges from 0 to 5 A. Two sets of data points are shown: Input Volt. 85V (squares) and Input Volt. 132V (triangles). Both sets show an increase in Ripple-Noise with Load Current. A solid diagonal line at approximately 4.3A indicates the rated load current range.</p>																																								
2. Values																																								
<table border="1"> <thead> <tr> <th rowspan="2">Load current [A]</th> <th>Input Volt. 85 [V]</th> <th>Input Volt. 132 [V]</th> </tr> <tr> <th>Ripple-Noise [mV]</th> <th>Ripple-Noise [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>20</td><td>25</td></tr> <tr><td>0.50</td><td>35</td><td>40</td></tr> <tr><td>1.00</td><td>40</td><td>45</td></tr> <tr><td>1.50</td><td>40</td><td>45</td></tr> <tr><td>2.00</td><td>45</td><td>45</td></tr> <tr><td>2.50</td><td>45</td><td>50</td></tr> <tr><td>3.00</td><td>50</td><td>50</td></tr> <tr><td>3.50</td><td>50</td><td>55</td></tr> <tr><td>4.30</td><td>55</td><td>60</td></tr> <tr><td>4.70</td><td>55</td><td>60</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.00	20	25	0.50	35	40	1.00	40	45	1.50	40	45	2.00	45	45	2.50	45	50	3.00	50	50	3.50	50	55	4.30	55	60	4.70	55	60	—	—	—
Load current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]																																						
	Ripple-Noise [mV]	Ripple-Noise [mV]																																						
0.00	20	25																																						
0.50	35	40																																						
1.00	40	45																																						
1.50	40	45																																						
2.00	45	45																																						
2.50	45	50																																						
3.00	50	50																																						
3.50	50	55																																						
4.30	55	60																																						
4.70	55	60																																						
—	—	—																																						
<p>Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図 p - p 値で示される。 (注) 斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line T2: Due to Switching</p> <p></p> <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																								

COSEL

Model	LDA50F-12	Temperature Testing Circuitry	25°C Figure A																																																									
Item	Overcurrent Protection 過電流保護																																																											
Object	+12.0V 4.3A																																																											
1. Graph		2. Values																																																										
<p>[V]</p>			<table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>12.00</td><td>5.52</td><td>5.44</td><td>5.40</td></tr> <tr><td>11.40</td><td>5.51</td><td>5.45</td><td>5.42</td></tr> <tr><td>10.80</td><td>5.52</td><td>5.47</td><td>5.44</td></tr> <tr><td>9.60</td><td>5.55</td><td>5.51</td><td>5.50</td></tr> <tr><td>8.40</td><td>5.59</td><td>5.57</td><td>5.56</td></tr> <tr><td>7.20</td><td>5.65</td><td>5.63</td><td>5.60</td></tr> <tr><td>6.00</td><td>5.70</td><td>5.68</td><td>5.64</td></tr> <tr><td>4.80</td><td>5.77</td><td>5.75</td><td>5.70</td></tr> <tr><td>3.60</td><td>5.82</td><td>5.79</td><td>5.74</td></tr> <tr><td>2.40</td><td>5.88</td><td>5.84</td><td>5.76</td></tr> <tr><td>1.20</td><td>5.92</td><td>5.84</td><td>5.68</td></tr> <tr><td>0.00</td><td>5.75</td><td>5.56</td><td>5.22</td></tr> </tbody> </table>			Output Voltage [V]	Load Current [A]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	12.00	5.52	5.44	5.40	11.40	5.51	5.45	5.42	10.80	5.52	5.47	5.44	9.60	5.55	5.51	5.50	8.40	5.59	5.57	5.56	7.20	5.65	5.63	5.60	6.00	5.70	5.68	5.64	4.80	5.77	5.75	5.70	3.60	5.82	5.79	5.74	2.40	5.88	5.84	5.76	1.20	5.92	5.84	5.68	0.00	5.75	5.56	5.22
Output Voltage [V]	Load Current [A]																																																											
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																									
12.00	5.52	5.44	5.40																																																									
11.40	5.51	5.45	5.42																																																									
10.80	5.52	5.47	5.44																																																									
9.60	5.55	5.51	5.50																																																									
8.40	5.59	5.57	5.56																																																									
7.20	5.65	5.63	5.60																																																									
6.00	5.70	5.68	5.64																																																									
4.80	5.77	5.75	5.70																																																									
3.60	5.82	5.79	5.74																																																									
2.40	5.88	5.84	5.76																																																									
1.20	5.92	5.84	5.68																																																									
0.00	5.75	5.56	5.22																																																									

Note: Slanted line shows the range of the rated load current.


(注) 斜線は定格負荷電流範囲を示す。

COSEL

Model	LDA50F-12																																																					
Item	Overvoltage Protection 過電圧保護	Testing Circuitry																																																				
Object	+12.0V 4.3A																																																					
1. Graph																																																						
			2. Values																																																			
<p>Operating Point [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 0%</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p>			<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Operating Point [V]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>-20</td><td>15.05</td><td>15.05</td><td>15.05</td></tr> <tr><td>-10</td><td>15.17</td><td>15.17</td><td>15.17</td></tr> <tr><td>0</td><td>15.23</td><td>15.23</td><td>15.23</td></tr> <tr><td>10</td><td>15.34</td><td>15.34</td><td>15.35</td></tr> <tr><td>20</td><td>15.46</td><td>15.46</td><td>15.46</td></tr> <tr><td>25</td><td>15.52</td><td>15.52</td><td>15.52</td></tr> <tr><td>30</td><td>15.52</td><td>15.52</td><td>15.52</td></tr> <tr><td>40</td><td>15.64</td><td>15.64</td><td>15.64</td></tr> <tr><td>50</td><td>15.76</td><td>15.76</td><td>15.76</td></tr> <tr><td>60</td><td>15.82</td><td>15.82</td><td>15.82</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Ambient Temperature [°C]	Operating Point [V]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	-20	15.05	15.05	15.05	-10	15.17	15.17	15.17	0	15.23	15.23	15.23	10	15.34	15.34	15.35	20	15.46	15.46	15.46	25	15.52	15.52	15.52	30	15.52	15.52	15.52	40	15.64	15.64	15.64	50	15.76	15.76	15.76	60	15.82	15.82	15.82	—	—	—	—
Ambient Temperature [°C]	Operating Point [V]																																																					
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																			
-20	15.05	15.05	15.05																																																			
-10	15.17	15.17	15.17																																																			
0	15.23	15.23	15.23																																																			
10	15.34	15.34	15.35																																																			
20	15.46	15.46	15.46																																																			
25	15.52	15.52	15.52																																																			
30	15.52	15.52	15.52																																																			
40	15.64	15.64	15.64																																																			
50	15.76	15.76	15.76																																																			
60	15.82	15.82	15.82																																																			
—	—	—	—																																																			

COSEL

Model	LDA50F-12	Temperature Testing Circuitry	25°C
Item	Inrush Current 突入電流		Figure A
Object	_____		

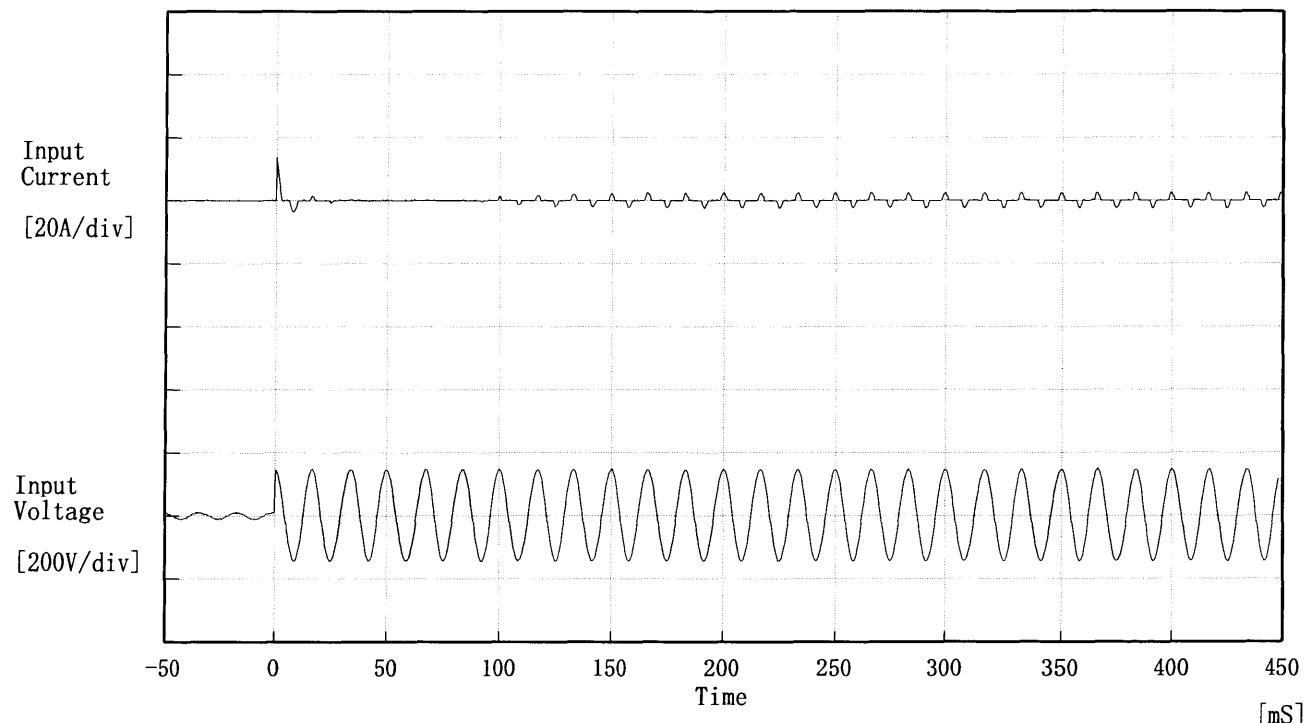

Input Voltage 100 V


Frequency 60 Hz

Load 100 %

Inrush Current

① 13.60 [A]

② 2.40 [A]

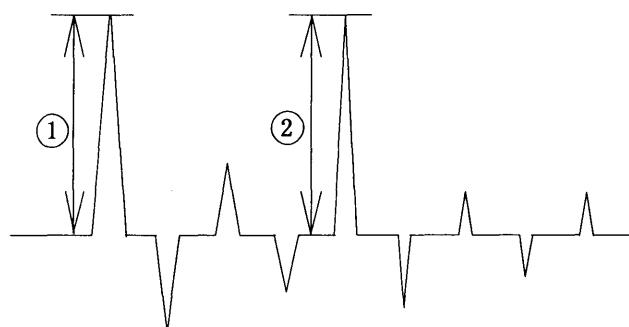


COSEL

Model	LDA50F-12
Item	Dynamic Load Response 動的負荷變動
Object	+12.0V 4.3A

Temperature 25°C
Testing Circuitry Figure A



Input Volt. 100 V

Cycle 1000 mS





Load 0% ↔

Load 100 %

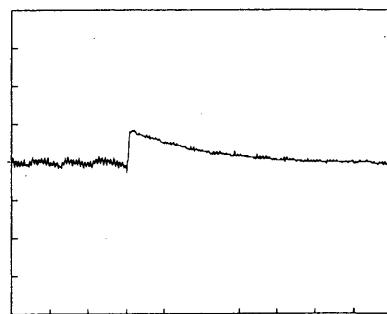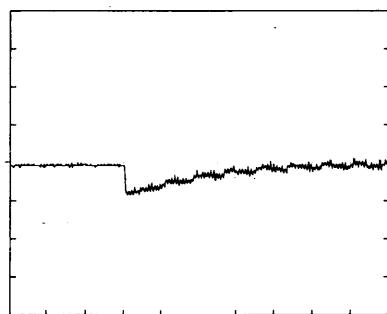


Load 0% ↔


Load 50 %

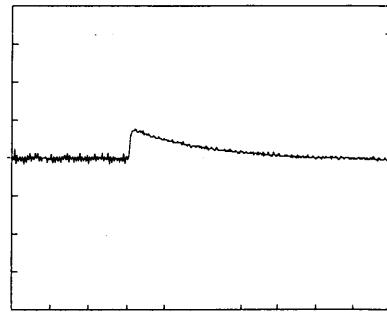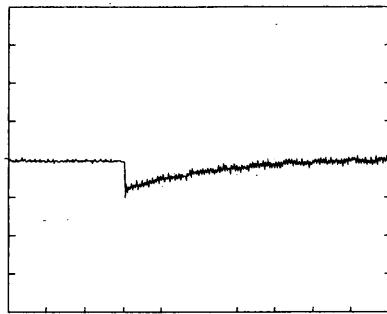

100 mV/div

10 mS/div

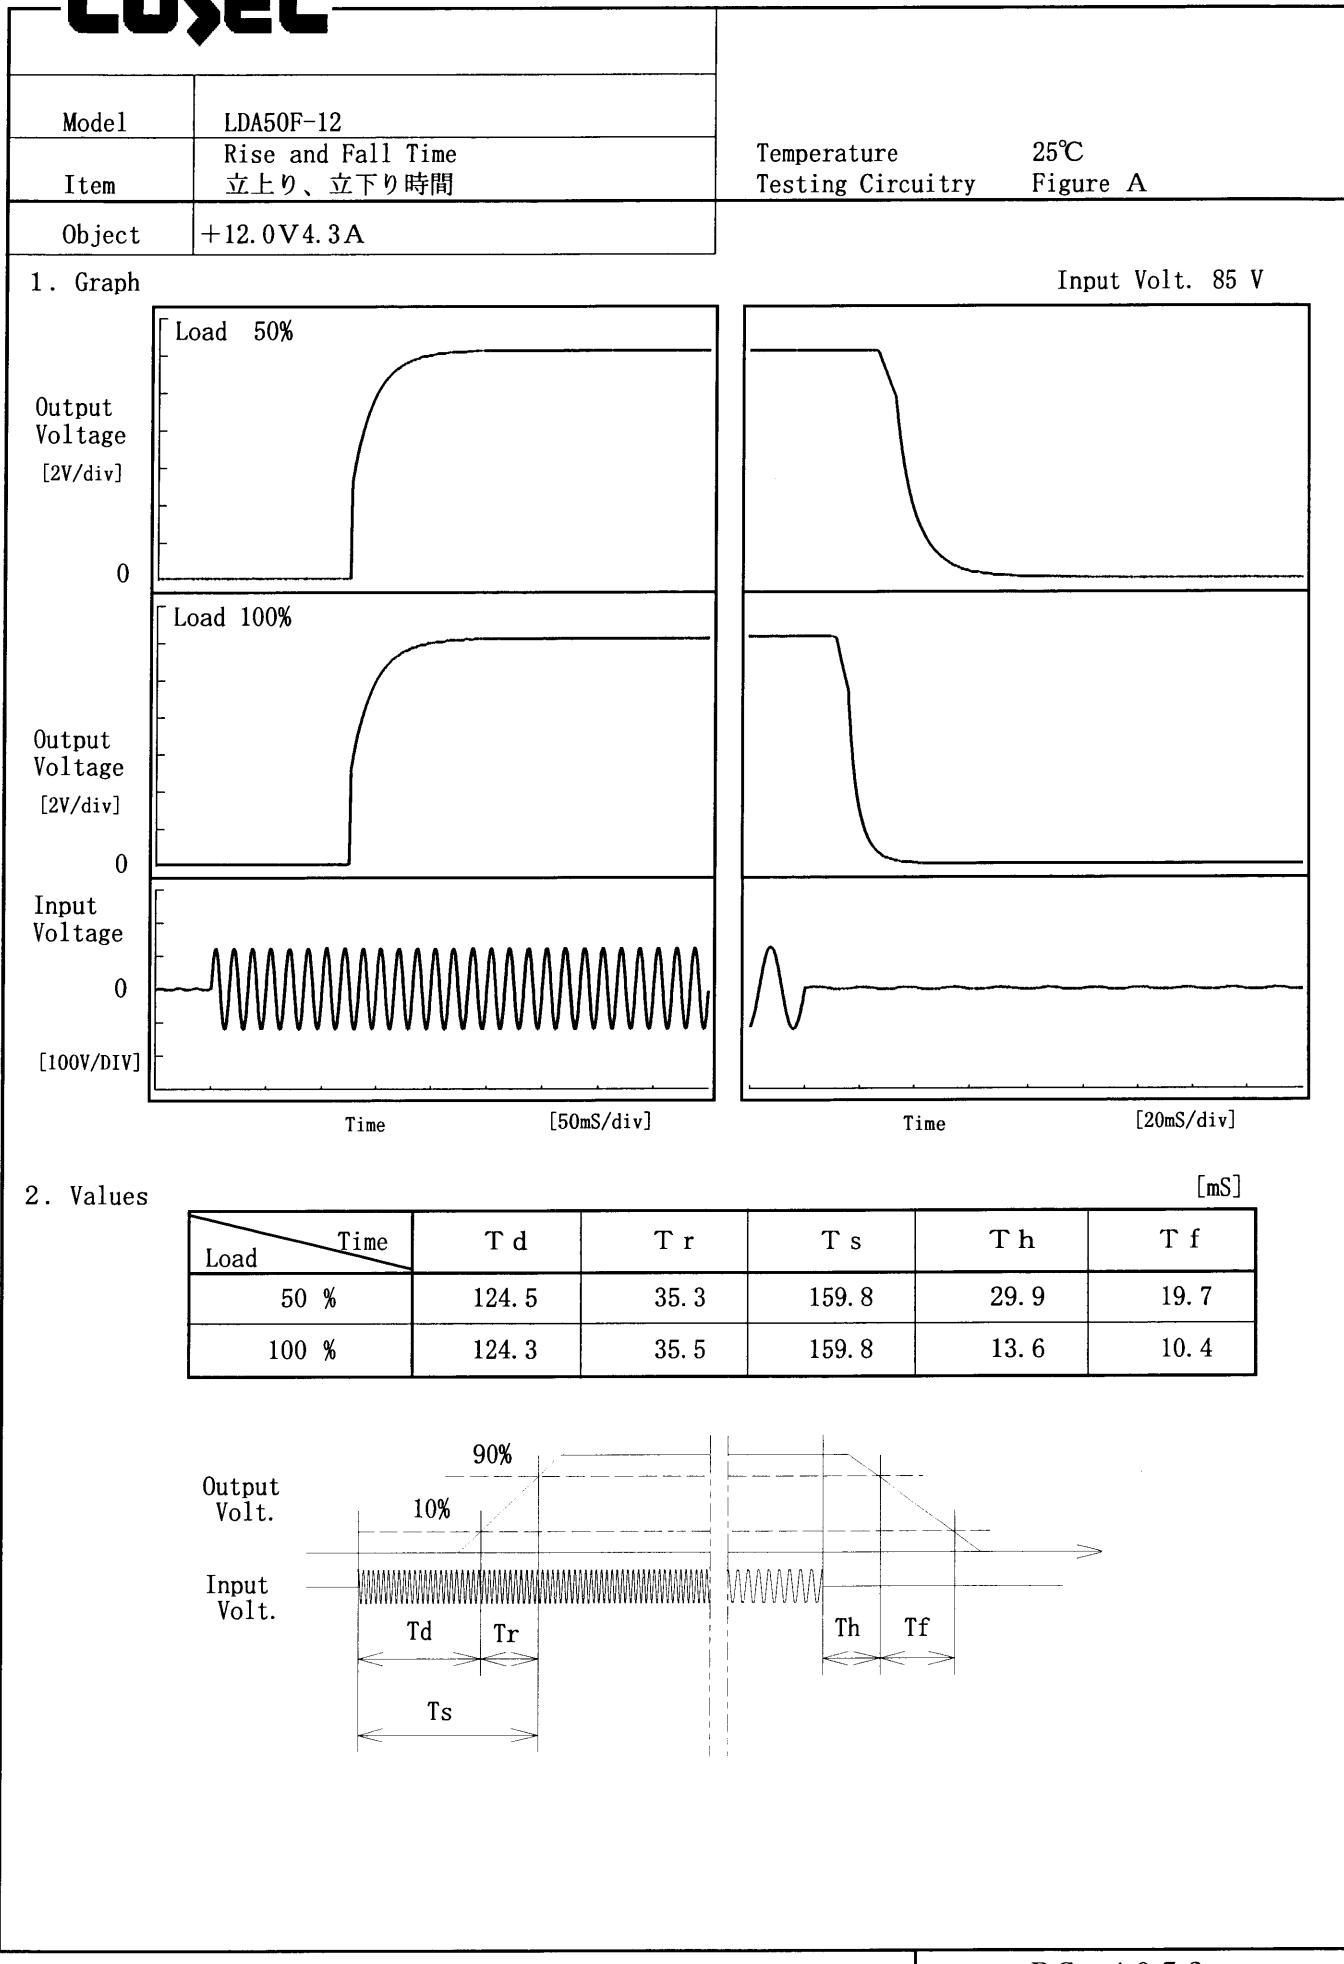COSEL

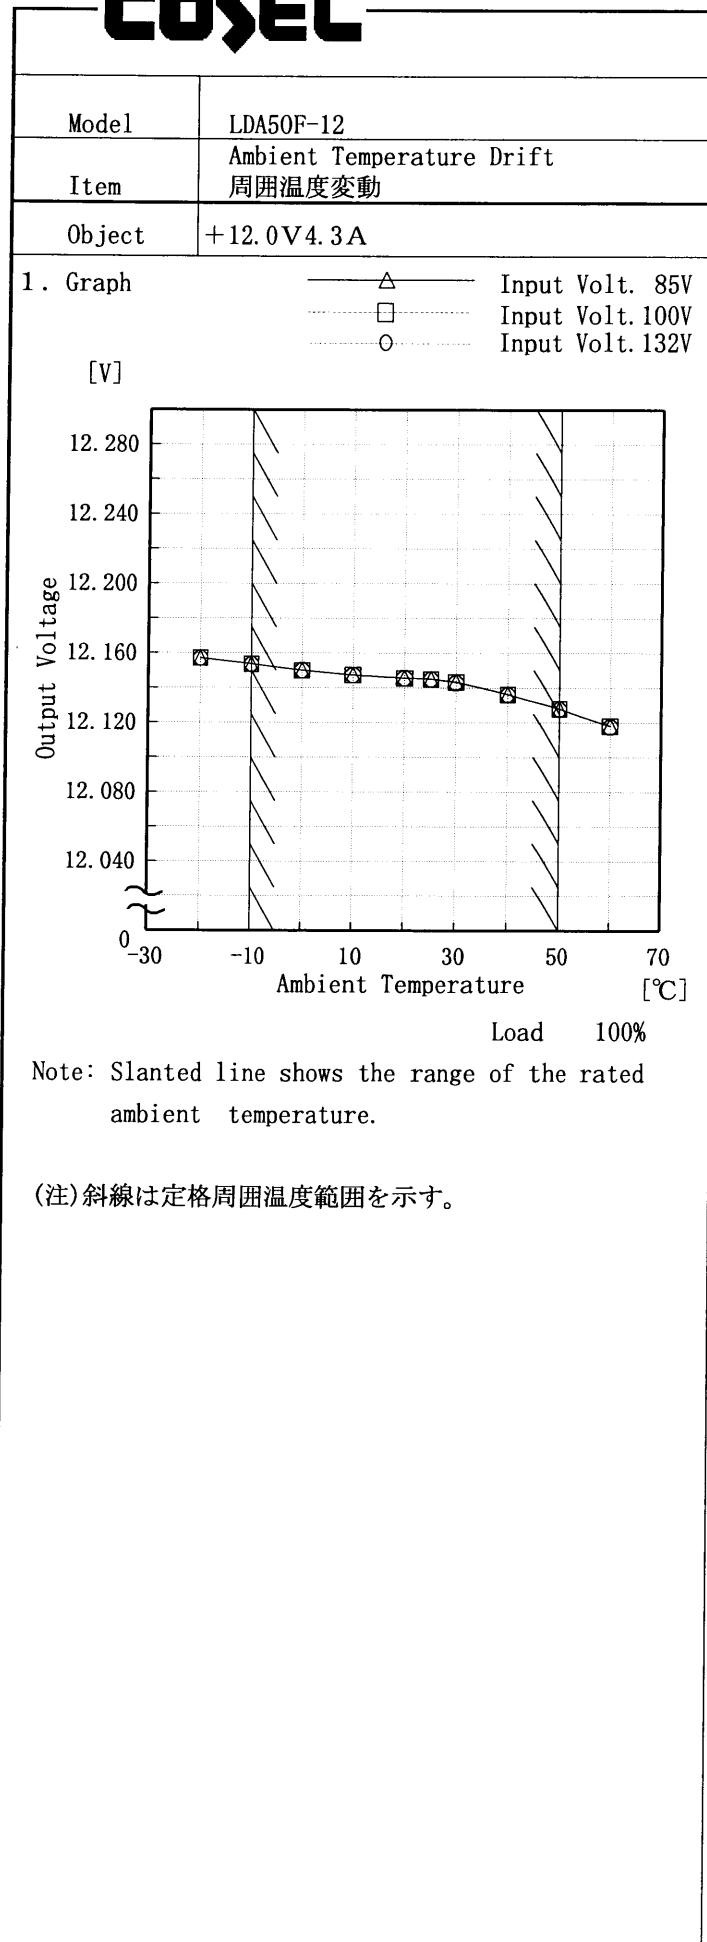COSEL

Testing Circuitry Figure A

2. Values


Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
-20	12.157	12.157	12.157
-10	12.154	12.154	12.154
0	12.150	12.150	12.150
10	12.147	12.147	12.147
20	12.146	12.146	12.146
25	12.145	12.145	12.145
30	12.143	12.143	12.143
40	12.136	12.136	12.136
50	12.128	12.128	12.128
60	12.118	12.118	12.118
—	—	—	—

COSEL

Model	LDA50F-12																																								
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧																																								
Object	+12.0V 4.3A																																								
1. Graph	<p>Load 50% Load 100%</p> <p>[V] [°C]</p> <p>Input Voltage</p> <p>Ambient Temperature</p>																																								
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Input Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-20</td><td>55</td><td>61</td></tr> <tr><td>-10</td><td>54</td><td>61</td></tr> <tr><td>0</td><td>54</td><td>61</td></tr> <tr><td>10</td><td>53</td><td>61</td></tr> <tr><td>20</td><td>53</td><td>61</td></tr> <tr><td>25</td><td>53</td><td>61</td></tr> <tr><td>30</td><td>53</td><td>61</td></tr> <tr><td>40</td><td>53</td><td>61</td></tr> <tr><td>50</td><td>53</td><td>61</td></tr> <tr><td>60</td><td>52</td><td>61</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-20	55	61	-10	54	61	0	54	61	10	53	61	20	53	61	25	53	61	30	53	61	40	53	61	50	53	61	60	52	61	—	—	—
Ambient Temperature [°C]	Input Voltage [V]																																								
	Load 50%	Load 100%																																							
-20	55	61																																							
-10	54	61																																							
0	54	61																																							
10	53	61																																							
20	53	61																																							
25	53	61																																							
30	53	61																																							
40	53	61																																							
50	53	61																																							
60	52	61																																							
—	—	—																																							

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

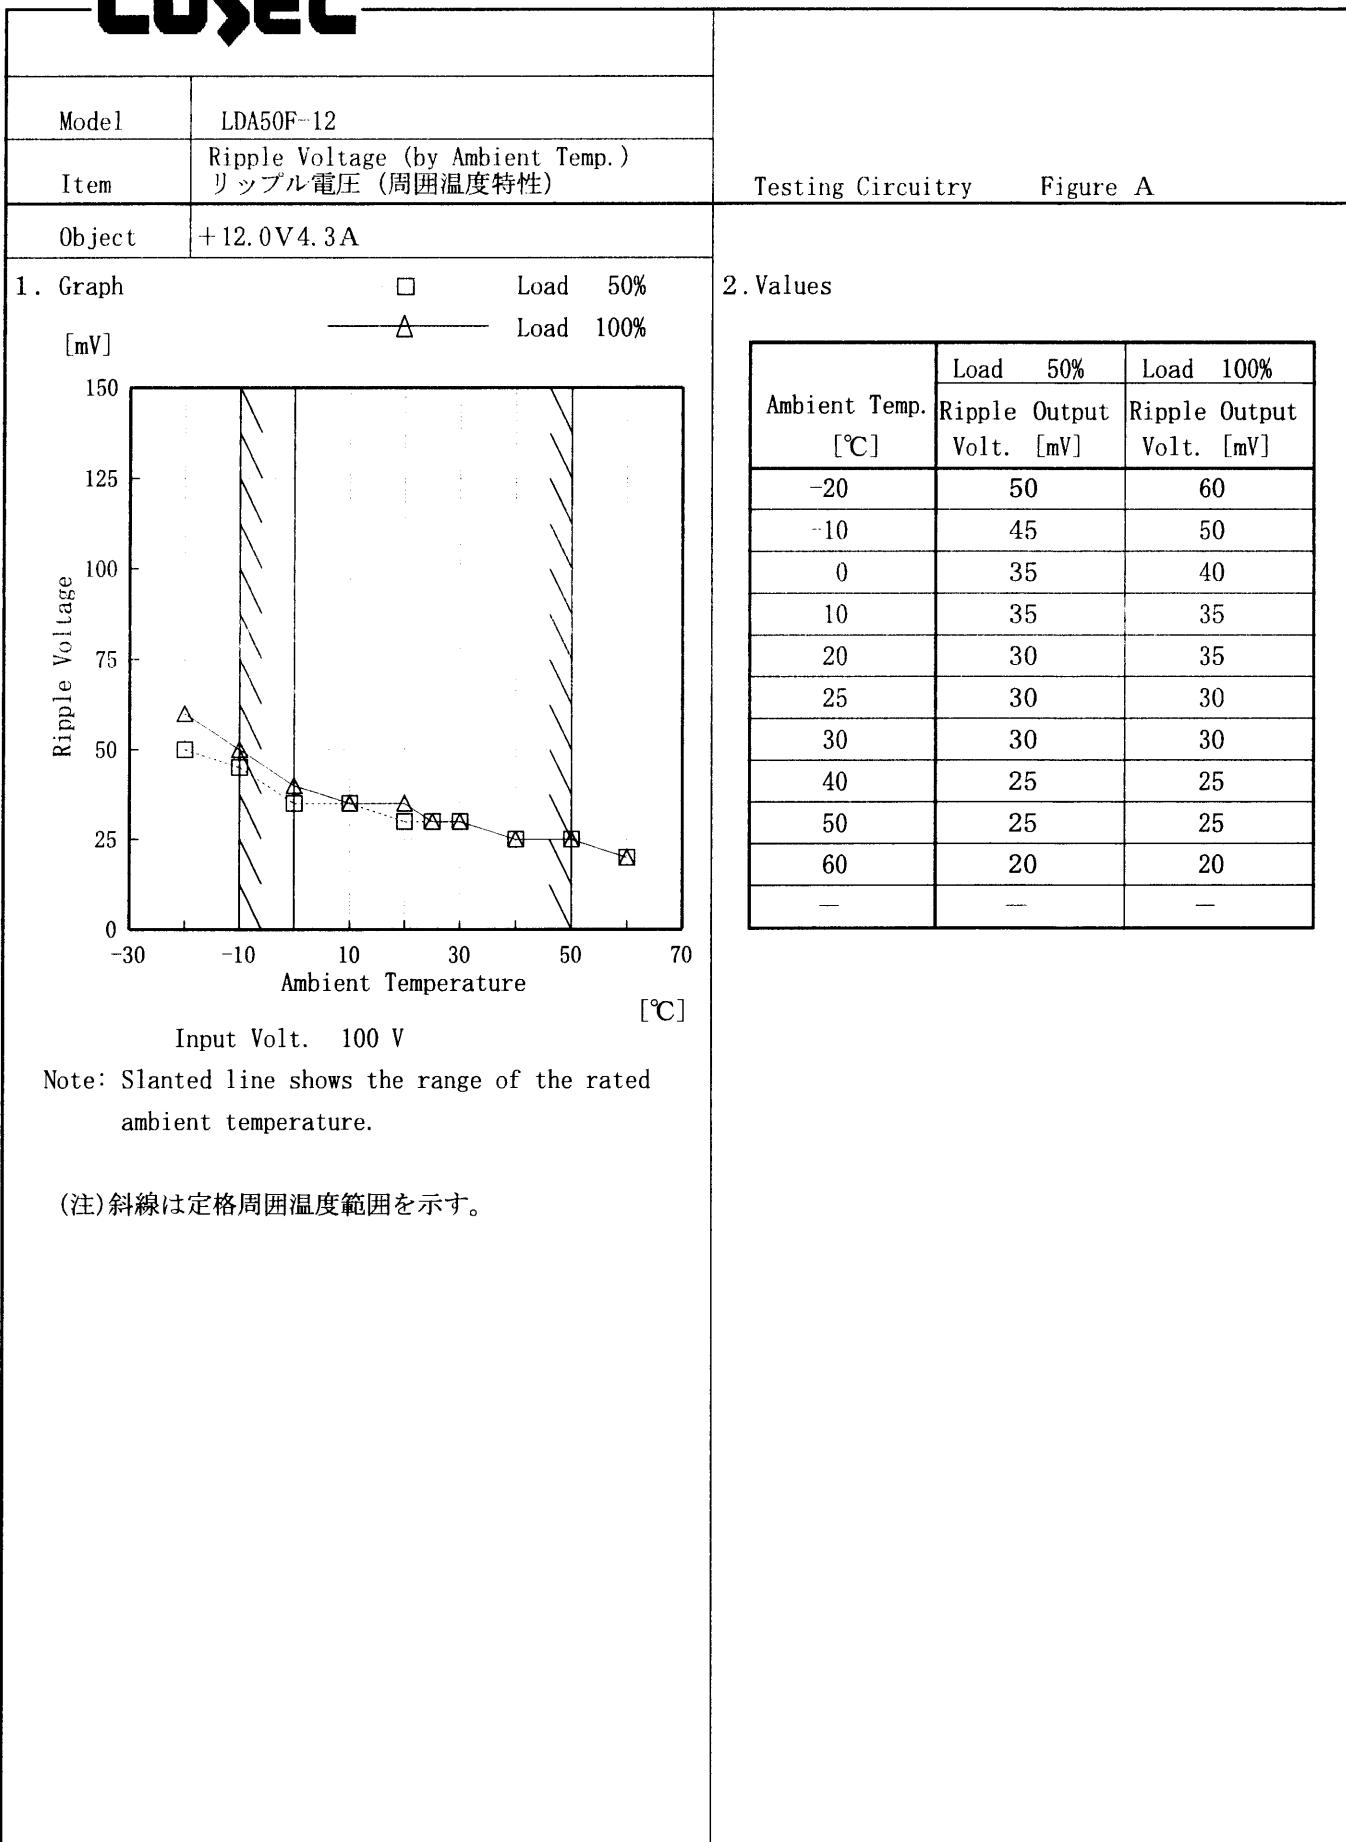COSEL

COSEL

Model	LDA50F-12	Temperature	25°C																						
Item	Time Lapse Drift 経時ドリフト	Testing Circuitry	Figure A																						
Object	+12.0V 4.3A																								
1. Graph																									
<p>[V]</p> <table border="1"> <tr> <td>0</td> <td>12.080</td> </tr> <tr> <td>1</td> <td>12.100</td> </tr> <tr> <td>2</td> <td>12.120</td> </tr> <tr> <td>3</td> <td>12.140</td> </tr> <tr> <td>4</td> <td>12.160</td> </tr> <tr> <td>5</td> <td>12.180</td> </tr> <tr> <td>6</td> <td>12.200</td> </tr> </table> <p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 100V Load 100%</p>				0	12.080	1	12.100	2	12.120	3	12.140	4	12.160	5	12.180	6	12.200								
0	12.080																								
1	12.100																								
2	12.120																								
3	12.140																								
4	12.160																								
5	12.180																								
6	12.200																								
			2. Values																						
<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>12.141</td></tr> <tr><td>0.5</td><td>12.132</td></tr> <tr><td>1.0</td><td>12.132</td></tr> <tr><td>2.0</td><td>12.133</td></tr> <tr><td>3.0</td><td>12.133</td></tr> <tr><td>4.0</td><td>12.133</td></tr> <tr><td>5.0</td><td>12.133</td></tr> <tr><td>6.0</td><td>12.133</td></tr> <tr><td>7.0</td><td>12.133</td></tr> <tr><td>8.0</td><td>12.133</td></tr> </tbody> </table>				Time since start [H]	Output Voltage [V]	0.0	12.141	0.5	12.132	1.0	12.132	2.0	12.133	3.0	12.133	4.0	12.133	5.0	12.133	6.0	12.133	7.0	12.133	8.0	12.133
Time since start [H]	Output Voltage [V]																								
0.0	12.141																								
0.5	12.132																								
1.0	12.132																								
2.0	12.133																								
3.0	12.133																								
4.0	12.133																								
5.0	12.133																								
6.0	12.133																								
7.0	12.133																								
8.0	12.133																								



Model	LDA50F-12	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+12.0V 4.3A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature -10~50 °C

Input Voltage : 85~132 V

Load Current : 0~4.3 A

* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage) / 2

$$* \text{ Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 85~132 V

負荷電流 0~4.3 A

* 定電圧精度(変動値) = ±(出力電圧の最高値 - 出力電圧の最低値) / 2

$$* \text{ 定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-10	132	0.0	12.154	±21	±0.2
Minimum Voltage	50	132	4.3	12.112		



Model	LDA50F-12	Testing Circuitry Figure A
Item	Condensation 結露特性	
Object	+12.0V 4.3A	

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	12.145	Input Volt.: 100V, Load Current: 4.3A
Line Regulation [mV]	2	Input Volt.: 85~132V, Load Current: 4.3A
Load Regulation [mV]	11	Input Volt.: 100V, Load Current: 0 ~4.3A



Model	LDA50F-12	Temperature	25°C
Item	Leakage Current 漏洩電流	Testing Circuitry	Figure B
Object	_____		

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	0.17	0.21	0.27
(B) IEC60950	0.18	0.21	0.27

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力の両相について測定し、その大きい方を漏洩電流測定値とする。

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	—	—	—



Model	LDA50F-12	Temperature	25°C
Item	Line Noise Tolerance 入力雑音耐量	Testing Circuitry	Figure C
Object	+12.0V 4.3A		

1. Results

Pulse Width [nS]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

2. Conditions

Input Voltage : 100 V
 Pulse Voltage : 2000 V
 Pulse Cycle : 10 mS
 Pulse Input Duration : 1 min. or more
 Load : 100 %

COSEL

Model	LDA50F-12	Temperature Testing Circuitry	25°C Figure D
Item	Conducted Emission 雜音端子電圧		
Object	_____		

1. Graph

Remarks


Input Volt. 100 V (VCCI Class B)

120 V (FCC Class B)


Load 100 %

規格 1: [VCCI] Class B(QP)




規格 2: [VCCI] Class B(平均値)

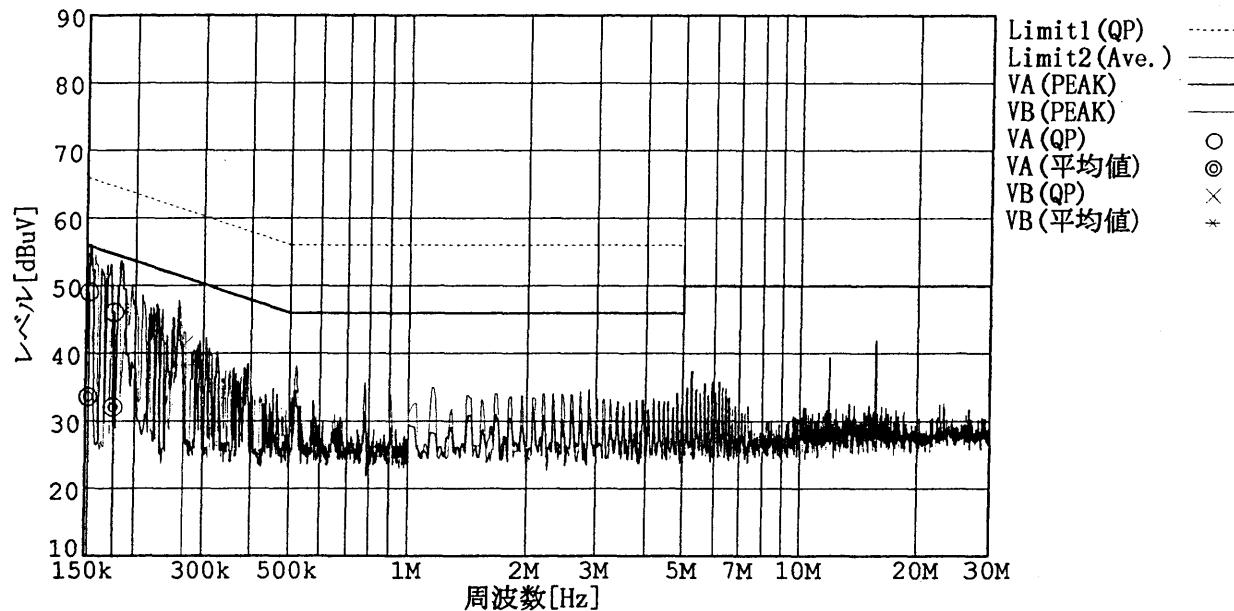

規格 1: [FCC Part15] Class B

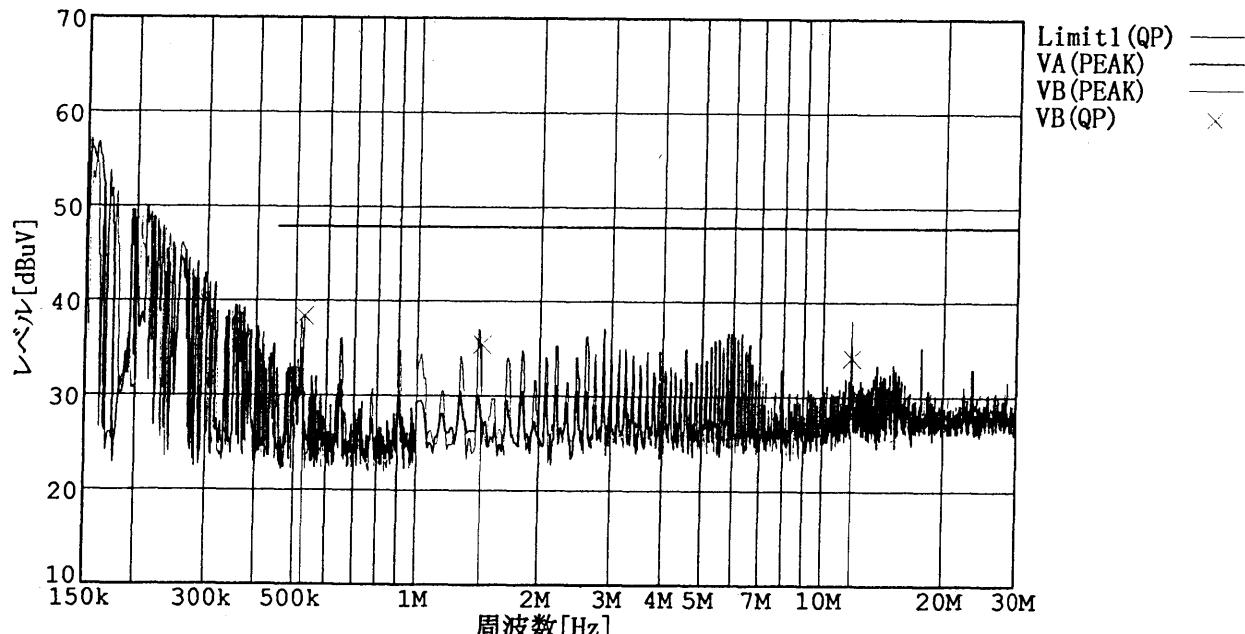

COSEL

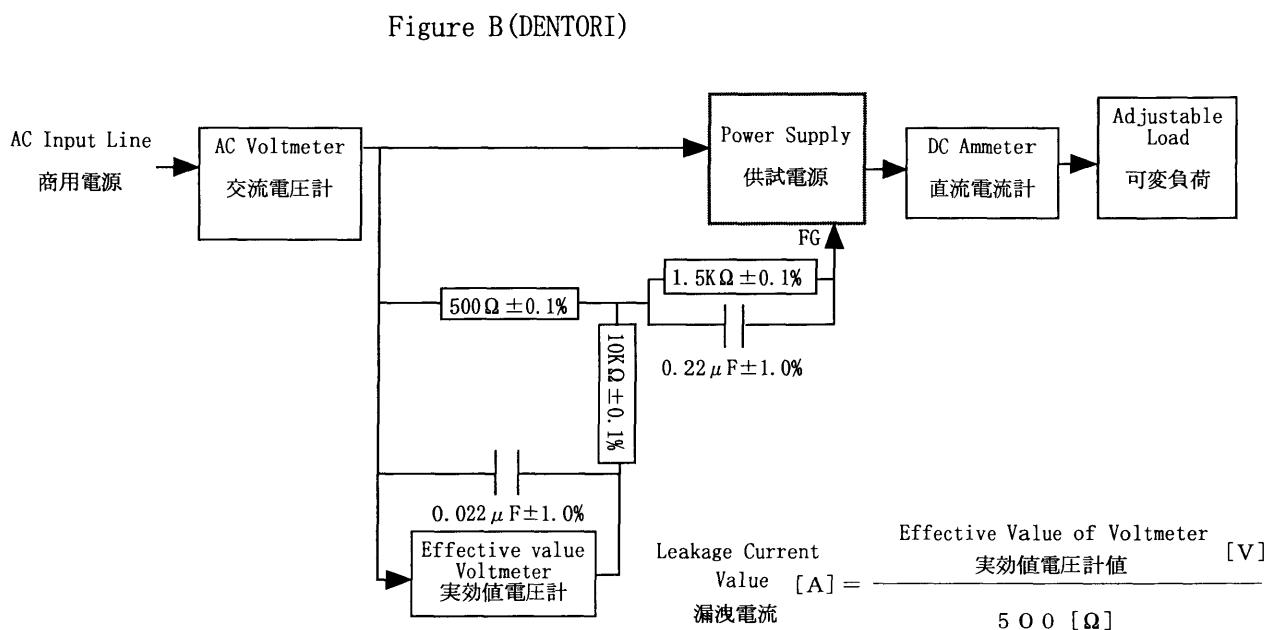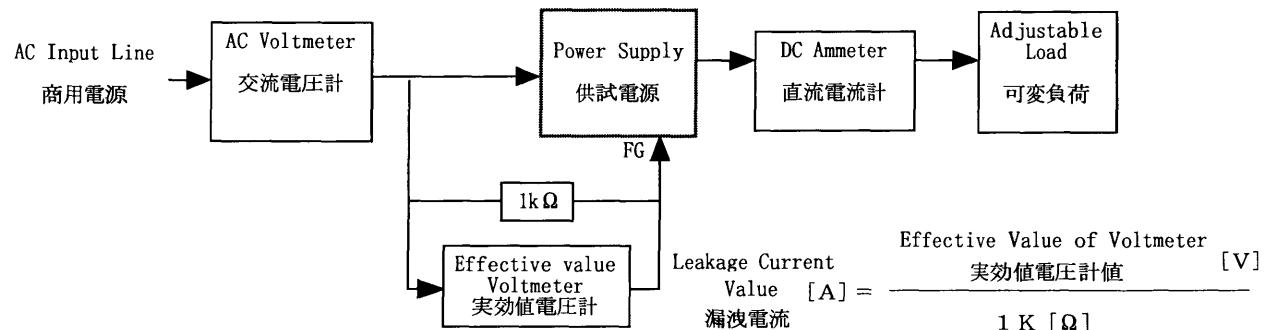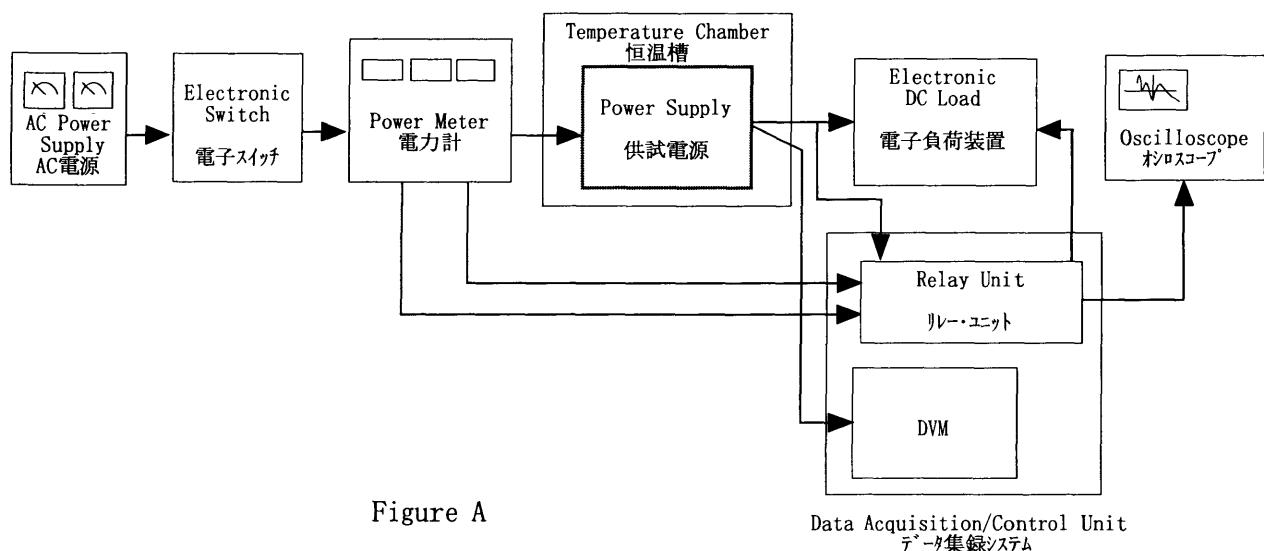

COSEL

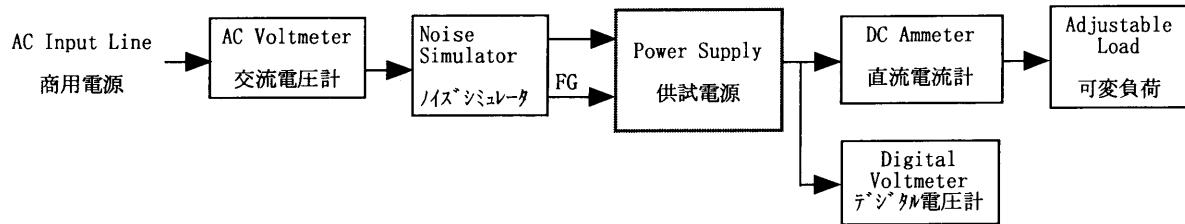


Figure C

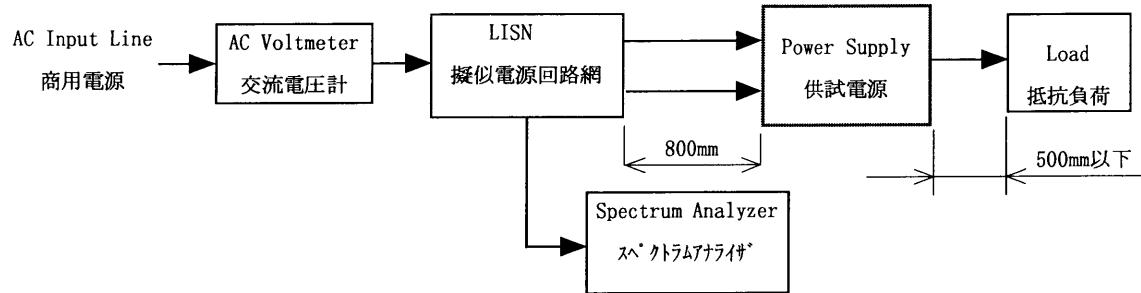


Figure D

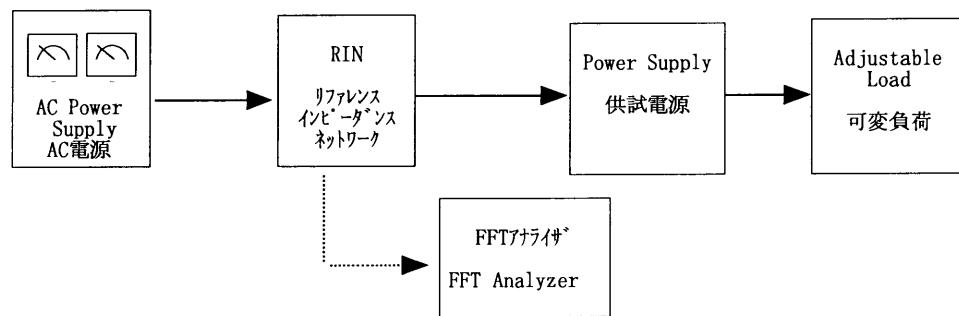


Figure E