


RADIATED EMISSION

Model Name :LDA50F-9
 Model No. :
 Serial No. :
 Points :3
 Detector :PEAK/QP
 Polarization :Hori.&Vert.
 Limit:[CISPR 22] Class B<3m>

Power Supply :230V(1 Phase) 50Hz
 Temp. :25degC
 Humi. :44%
 Date :2001/3/19
 Test Equip. :R3132,ESPC
 Comment :

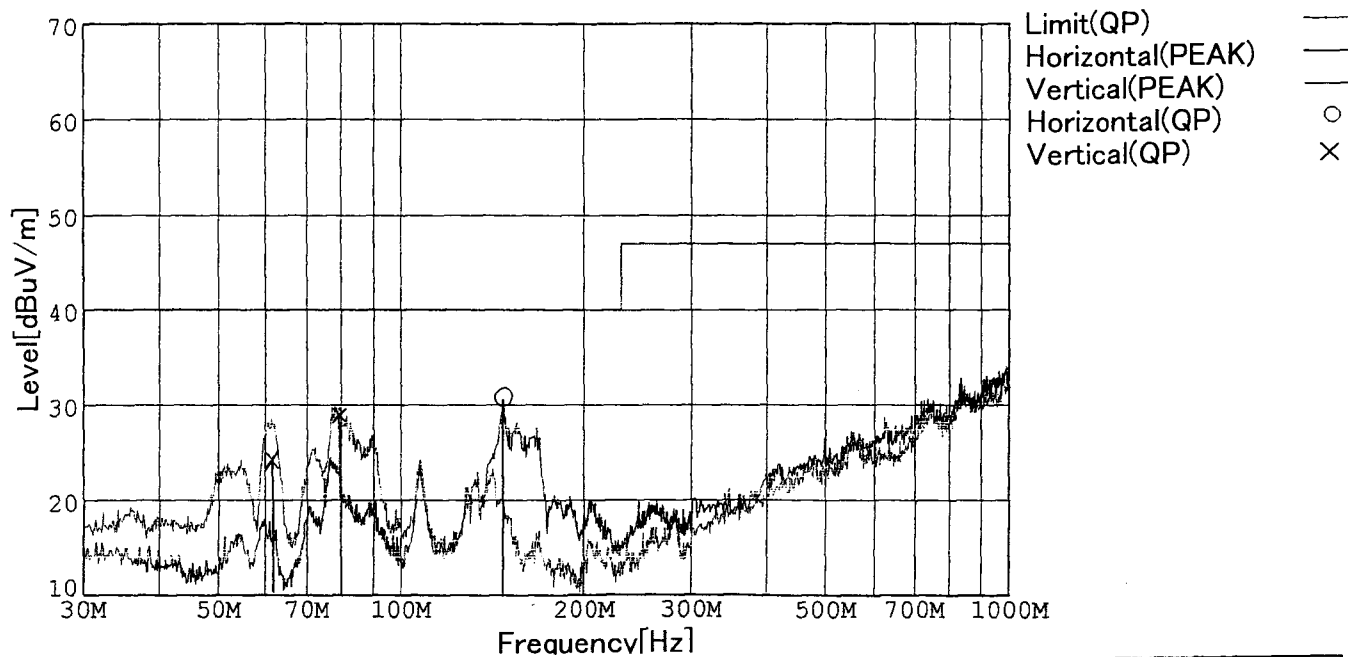

Frequency [MHz]	Meter Reading (QP) [dBuV]	Antena Factor [dBuV]	Cable & Preamp [dB]	Level (Qp) [dBuV]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
146.651	45.0	10.7	-24.9	30.8	77	157	Hori.	40.0	9.2
79.719	46.2	7.0	-24.2	29.0	121	122	Vert.	40.0	11.0
61.303	44.1	4.7	-23.1	25.7	1	107	Vert.	40.0	14.3



LINE CONDUCTION

Model Name :LDA50F-9

Model No. :

Serial No. :

Points :4

Detector :PEAK/QP/Ave.

Line Mode :VA/VB

Limit1:[CISPR Pub22] Class B(QP)

Limit2:[CISPR Pub22] Class B(Ave.)

Power Supply :230V(1 Phase) 50Hz


Temp. :25degC

Humi. :44%

Date :2001/3/19

Test Equip. :R3132,ESPC

Comment :

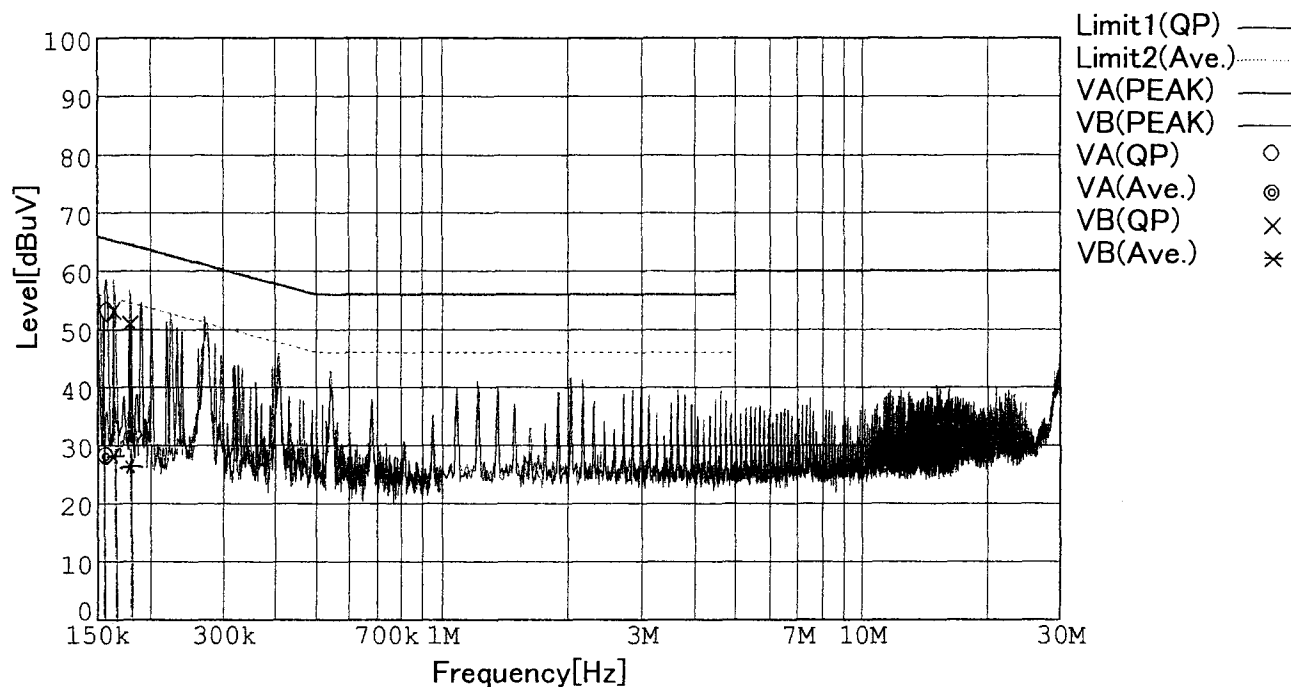

Frequency [MHz]	Meter Reading (QP) [dBuV]	Meter Reading (Ave.) [dBuV]	Factor [dB]	Level (QP) [dBuV]	Level (Ave.) [dBuV]	Line	Limit (QP) [dBuV]	Limit (Ave.) [dBuV]	Margin (QP) [dB]	Margin (Ave.) [dB]
0.1592	42.7	17.4	9.8	52.5	27.2	VA	65.5	55.5	13.0	28.3
0.1619	42.4	17.0	9.8	52.2	26.8	VB	65.4	55.4	13.2	28.6
0.1767	40.5	16.1	9.8	50.3	25.9	VB	64.6	54.6	14.3	28.7