



# TEST DATA OF LDA75F-12

(200V INPUT)

Regulated DC Power Supply

Aug. 20. 1999

Approved by : H. Yamaguchi  
Design Manager

Prepared by : J. Asano  
Design Engineer

コーワセル株式会社  
COSEL CO., LTD.



## C O N T E N T S

1. Line Regulation	1
静的入力変動	
2. Input Current (by Load Current)	2
入力電流 (負荷特性)	
3. Input Power (by Load Current)	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage)	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current)	5
効率 (負荷特性)	
6. Hold-Up Time	6
出力保持時間	
7. Instantaneous Interruption Compensation	7
瞬時停電保障	
8. Load Regulation	8
静的負荷変動	
9. Ripple Voltage (by Load Current)	9
リップル電圧 (負荷特性)	
10. Ripple-Noise	10
リップルノイズ	
11. Overcurrent Protection	11
過電流保護	
12. Overvoltage Protection	12
過電圧保護	
13. Inrush Current	13
突入電流	
14. Dynamic Load Responce	14
動的負荷変動	
15. Rise and Fall Time	15
立ち上り、立下がり時間	
16. Ambient Temperature Drift	16
周囲温度変動	
17. Minimum Input Voltage for Regulated Output Voltage	17
最低レギュレーション電圧	
18. Ripple Voltage (by Ambient Temperature)	18
リップル電圧 (周囲温度特性)	
19. Time Lapse Drift	19
経時ドリフト	
20. Output Voltage Accuracy	20
定電圧精度	
21. Condensation	21
結露特性	
22. Leakage Current	22
漏洩電流	
23. Line Noise Tolerance	23
入力雑音耐量	
24. Conducted Emission	24
雑音端子電圧	
25. Figure of Testing Circuitry	25
測定回路図	

(Final Page 26 )

**COSEL**

Model	LDA75F-12		Temperature Testing Circuitry	25°C Figure A																																
Item	Line Regulation 静的入力変動																																			
Object	+12.0V 6.3A																																			
1. Graph	<p style="text-align: center;">□ Load 50% △ Load 100%</p>																																			
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>150</td><td>12.102</td><td>12.097</td></tr> <tr><td>160</td><td>12.101</td><td>12.097</td></tr> <tr><td>170</td><td>12.101</td><td>12.097</td></tr> <tr><td>180</td><td>12.101</td><td>12.097</td></tr> <tr><td>200</td><td>12.101</td><td>12.097</td></tr> <tr><td>220</td><td>12.101</td><td>12.097</td></tr> <tr><td>240</td><td>12.101</td><td>12.097</td></tr> <tr><td>264</td><td>12.101</td><td>12.097</td></tr> <tr><td>280</td><td>12.101</td><td>12.097</td></tr> </tbody> </table>				Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	150	12.102	12.097	160	12.101	12.097	170	12.101	12.097	180	12.101	12.097	200	12.101	12.097	220	12.101	12.097	240	12.101	12.097	264	12.101	12.097	280	12.101	12.097
Input Voltage [V]	Output Voltage [V]																																			
	Load 50%	Load 100%																																		
150	12.102	12.097																																		
160	12.101	12.097																																		
170	12.101	12.097																																		
180	12.101	12.097																																		
200	12.101	12.097																																		
220	12.101	12.097																																		
240	12.101	12.097																																		
264	12.101	12.097																																		
280	12.101	12.097																																		

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

**COSSEL**

Model	LDA75F-12																																																									
Item	Input Current (by Load Current) 入力電流 (負荷特性)	Temperature 25°C	Testing Circuitry Figure A																																																							
Output	_____																																																									
1. Graph	<p>—△— Input Volt. 170V □ Input Volt. 200V ○ Input Volt. 264V</p>																																																									
	<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.072</td><td>0.069</td><td>0.074</td></tr> <tr><td>1.00</td><td>0.239</td><td>0.224</td><td>0.206</td></tr> <tr><td>2.00</td><td>0.385</td><td>0.351</td><td>0.308</td></tr> <tr><td>3.00</td><td>0.543</td><td>0.488</td><td>0.416</td></tr> <tr><td>4.00</td><td>0.706</td><td>0.631</td><td>0.529</td></tr> <tr><td>5.00</td><td>0.871</td><td>0.774</td><td>0.643</td></tr> <tr><td>6.00</td><td>1.036</td><td>0.919</td><td>0.759</td></tr> <tr><td>6.30</td><td>1.091</td><td>0.968</td><td>0.798</td></tr> <tr><td>6.93</td><td>1.192</td><td>1.057</td><td>0.870</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Current [A]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.00	0.072	0.069	0.074	1.00	0.239	0.224	0.206	2.00	0.385	0.351	0.308	3.00	0.543	0.488	0.416	4.00	0.706	0.631	0.529	5.00	0.871	0.774	0.643	6.00	1.036	0.919	0.759	6.30	1.091	0.968	0.798	6.93	1.192	1.057	0.870	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Current [A]																																																									
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																							
0.00	0.072	0.069	0.074																																																							
1.00	0.239	0.224	0.206																																																							
2.00	0.385	0.351	0.308																																																							
3.00	0.543	0.488	0.416																																																							
4.00	0.706	0.631	0.529																																																							
5.00	0.871	0.774	0.643																																																							
6.00	1.036	0.919	0.759																																																							
6.30	1.091	0.968	0.798																																																							
6.93	1.192	1.057	0.870																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。


**COSEL**

Model LDA75F-12

Item Input Power (by Load Current)  
入力電力 (負荷特性)

Output \_\_\_\_\_

1. Graph

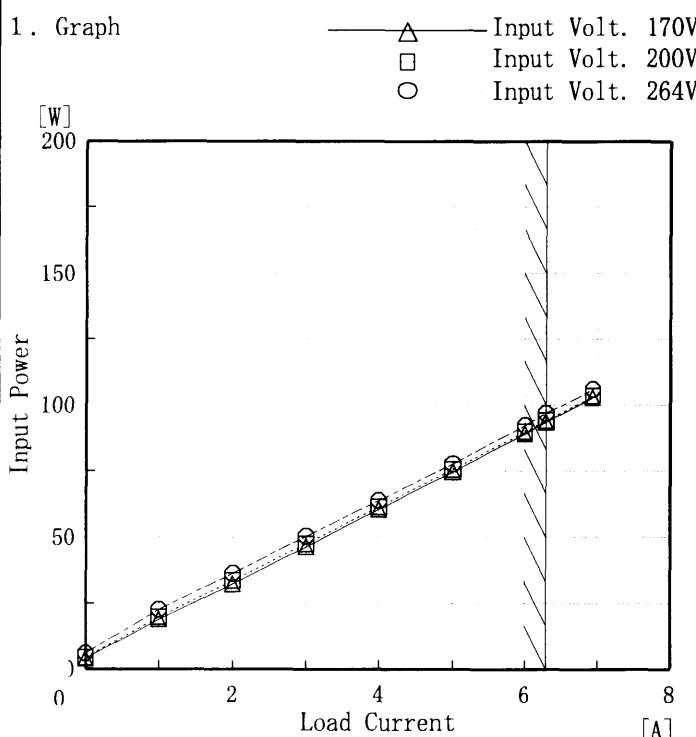

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。

Temperature 25°C  
Testing Circuitry Figure A

2. Values

Load Current [A]	Input Power [W]		
	Input Volt. 170 [V]	Input Volt. 200 [V]	Input Volt. 264 [V]
0.00	3.90	4.30	5.90
1.00	18.90	19.80	22.60
2.00	32.30	33.50	36.30
3.00	46.40	47.40	50.30
4.00	60.60	61.50	63.90
5.00	74.80	75.60	77.80
6.00	89.30	90.00	92.40
6.30	93.70	94.30	97.00
6.93	102.90	103.50	106.00
—	—	—	—
—	—	—	—
—	—	—	—

**COSEL**


Model	LDA75F-12		Temperature Testing Circuitry 25°C Figure A																																
Item	Efficiency 効率																																		
Object	_____																																		
1. Graph			2. Values																																
			<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>150</td><td>80.4</td><td>82.0</td></tr> <tr><td>160</td><td>79.9</td><td>81.5</td></tr> <tr><td>170</td><td>79.4</td><td>81.4</td></tr> <tr><td>180</td><td>78.7</td><td>81.3</td></tr> <tr><td>200</td><td>77.6</td><td>81.0</td></tr> <tr><td>220</td><td>76.1</td><td>80.5</td></tr> <tr><td>240</td><td>75.0</td><td>79.8</td></tr> <tr><td>264</td><td>73.3</td><td>79.2</td></tr> <tr><td>280</td><td>72.2</td><td>78.3</td></tr> </tbody> </table>	Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	150	80.4	82.0	160	79.9	81.5	170	79.4	81.4	180	78.7	81.3	200	77.6	81.0	220	76.1	80.5	240	75.0	79.8	264	73.3	79.2	280	72.2	78.3
Input Voltage [V]	Efficiency [%]																																		
	Load 50%	Load 100%																																	
150	80.4	82.0																																	
160	79.9	81.5																																	
170	79.4	81.4																																	
180	78.7	81.3																																	
200	77.6	81.0																																	
220	76.1	80.5																																	
240	75.0	79.8																																	
264	73.3	79.2																																	
280	72.2	78.3																																	

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

**COSEL**

Model	LDA75F-12	Temperature	25°C
Item	Efficiency (by Load Current) 効率 (負荷電流特性)	Testing Circuitry	Figure A
Output	_____		

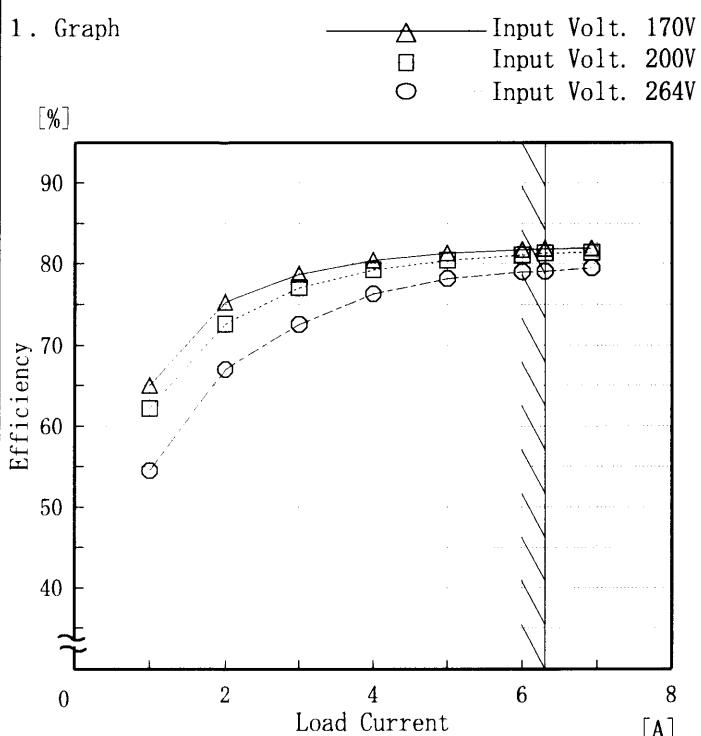

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。

## 2. Values

Load Current [A]	Efficiency [%]		
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
1.00	65.0	62.1	54.4
2.00	75.3	72.6	67.0
3.00	78.7	77.1	72.6
4.00	80.4	79.2	76.3
5.00	81.3	80.5	78.2
6.00	81.7	81.1	79.0
6.30	81.8	81.3	79.1
6.93	81.9	81.4	79.5
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—


**COSEL**

Model LDA75F-12

Item Hold-Up Time 出力保持時間

Object +12.0V 6.3A

1. Graph

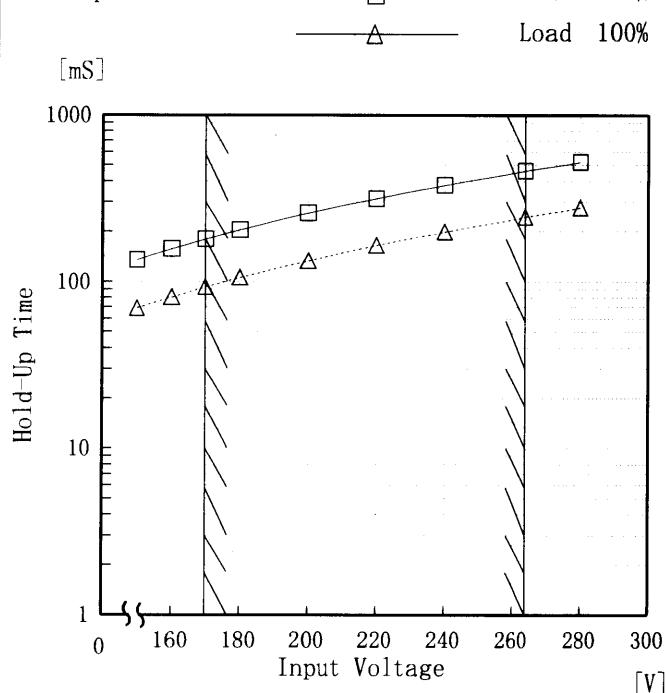Temperature 25°C  
Testing Circuitry Figure A

2. Values

Input Voltage [V]	Hold-Up Time [mS]	
	Load 50%	Load 100%
150	136	69
160	157	80
170	180	92
180	205	106
200	257	134
220	316	165
240	379	199
264	463	245
280	523	278

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.


Note: Slanted line shows the range of the rated input voltage.

出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。

(注)斜線は定格入力電圧範囲を示す。

**COSEL**

Model	LDA75F-12
Item	Instantaneous Interruption Compensation 瞬時停電保障
Object	+12.0V 6.3A

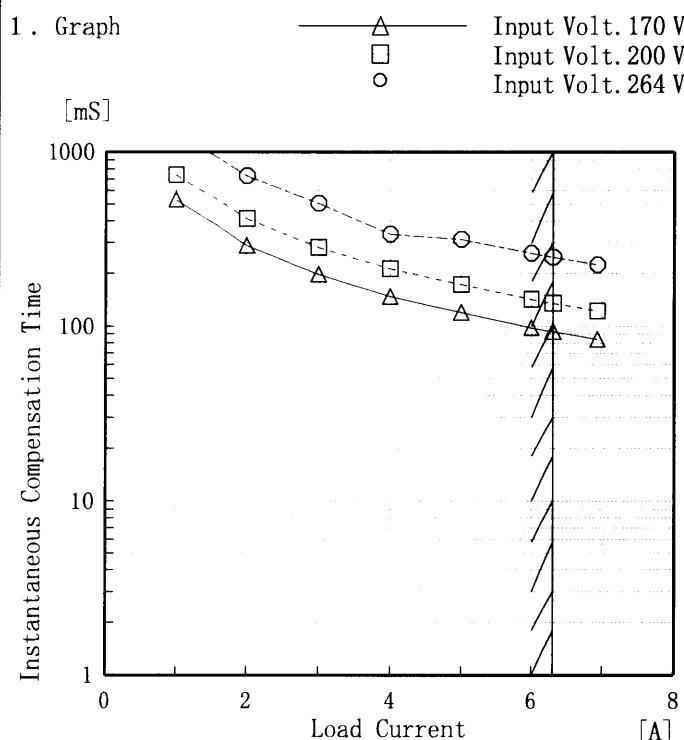Temperature 25°C  
Testing Circuitry Figure A

## 2. Values

Load Current [A]	Time [mS]		
	Input Volt. 170 V [ms]	Input Volt. 200 V [ms]	Input Volt. 264 V [ms]
0.00	—	—	—
1.00	530	739	1279
2.00	290	414	730
3.00	198	282	507
4.00	148	214	337
5.00	120	173	314
6.00	98	142	262
6.30	93	135	248
6.93	84	122	225
—	—	—	—
—	—	—	—

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated load current.

瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。

(注) 斜線は定格負荷電流範囲を示す。

**COSEL**

Model	LDA75F-12	Temperature Testing Circuitry      25°C Figure A																																																	
Item	Load Regulation 靜的負荷変動																																																		
Object	+12.0V 6.3A																																																		
1. Graph	<p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Legend:</p> <ul style="list-style-type: none"> <li>△ Input Volt. 170 V</li> <li>□ Input Volt. 200 V</li> <li>○ Input Volt. 264 V</li> </ul>	2. Values																																																	
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td><td>12.105</td><td>12.104</td><td>12.104</td></tr> <tr> <td>1.00</td><td>12.103</td><td>12.103</td><td>12.103</td></tr> <tr> <td>2.00</td><td>12.102</td><td>12.102</td><td>12.102</td></tr> <tr> <td>3.00</td><td>12.101</td><td>12.101</td><td>12.101</td></tr> <tr> <td>4.00</td><td>12.100</td><td>12.100</td><td>12.099</td></tr> <tr> <td>5.00</td><td>12.099</td><td>12.099</td><td>12.098</td></tr> <tr> <td>6.00</td><td>12.098</td><td>12.098</td><td>12.097</td></tr> <tr> <td>6.30</td><td>12.098</td><td>12.097</td><td>12.097</td></tr> <tr> <td>6.93</td><td>12.097</td><td>12.097</td><td>12.096</td></tr> <tr> <td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Output Voltage [V]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.00	12.105	12.104	12.104	1.00	12.103	12.103	12.103	2.00	12.102	12.102	12.102	3.00	12.101	12.101	12.101	4.00	12.100	12.100	12.099	5.00	12.099	12.099	12.098	6.00	12.098	12.098	12.097	6.30	12.098	12.097	12.097	6.93	12.097	12.097	12.096	—	—	—	—
Load Current [A]	Output Voltage [V]																																																		
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																
0.00	12.105	12.104	12.104																																																
1.00	12.103	12.103	12.103																																																
2.00	12.102	12.102	12.102																																																
3.00	12.101	12.101	12.101																																																
4.00	12.100	12.100	12.099																																																
5.00	12.099	12.099	12.098																																																
6.00	12.098	12.098	12.097																																																
6.30	12.098	12.097	12.097																																																
6.93	12.097	12.097	12.096																																																
—	—	—	—																																																

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

COSEL

Model	LDA75F-12	Temperature Testing Circuitry	25°C Figure A																																						
Item	Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)																																								
Object	+12.0V 6.3A																																								
1. Graph			2. Values																																						
			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 170 [V]</th> <th>Input Volt. 264 [V]</th> </tr> <tr> <th>Ripple Output Volt. [mV]</th> <th>Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>10</td><td>10</td></tr> <tr><td>0.70</td><td>20</td><td>20</td></tr> <tr><td>1.40</td><td>20</td><td>20</td></tr> <tr><td>2.10</td><td>20</td><td>20</td></tr> <tr><td>2.80</td><td>20</td><td>20</td></tr> <tr><td>3.50</td><td>20</td><td>20</td></tr> <tr><td>4.20</td><td>20</td><td>20</td></tr> <tr><td>4.90</td><td>20</td><td>20</td></tr> <tr><td>5.60</td><td>20</td><td>20</td></tr> <tr><td>6.30</td><td>20</td><td>25</td></tr> <tr><td>6.93</td><td>20</td><td>25</td></tr> </tbody> </table>	Load Current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.00	10	10	0.70	20	20	1.40	20	20	2.10	20	20	2.80	20	20	3.50	20	20	4.20	20	20	4.90	20	20	5.60	20	20	6.30	20	25	6.93	20	25
Load Current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]																																							
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																							
0.00	10	10																																							
0.70	20	20																																							
1.40	20	20																																							
2.10	20	20																																							
2.80	20	20																																							
3.50	20	20																																							
4.20	20	20																																							
4.90	20	20																																							
5.60	20	20																																							
6.30	20	25																																							
6.93	20	25																																							
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p - p 値で示される。 (注)斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line T2: Due to Switching</p>																																									
<p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																									

COSEL


Model	LDA75F-12	Temperature Testing Circuitry 25°C Figure A																																						
Item	Ripple-Noise リップルノイズ																																							
Object	+12.0V 6.3A																																							
1. Graph	<p style="text-align: center;">□ Input Volt. 170V △ Input Volt. 264V</p>	2. Values																																						
		<table border="1"> <thead> <tr> <th rowspan="2">Load current [A]</th> <th>Input Volt. 170 [V]</th> <th>Input Volt. 264 [V]</th> </tr> <tr> <th>Ripple-Noise [mV]</th> <th>Ripple-Noise [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>25</td><td>30</td></tr> <tr><td>0.70</td><td>35</td><td>30</td></tr> <tr><td>1.40</td><td>35</td><td>30</td></tr> <tr><td>2.10</td><td>35</td><td>35</td></tr> <tr><td>2.80</td><td>35</td><td>35</td></tr> <tr><td>3.50</td><td>40</td><td>40</td></tr> <tr><td>4.20</td><td>40</td><td>40</td></tr> <tr><td>4.90</td><td>40</td><td>40</td></tr> <tr><td>5.60</td><td>45</td><td>45</td></tr> <tr><td>6.30</td><td>50</td><td>45</td></tr> <tr><td>6.93</td><td>50</td><td>45</td></tr> </tbody> </table>	Load current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.00	25	30	0.70	35	30	1.40	35	30	2.10	35	35	2.80	35	35	3.50	40	40	4.20	40	40	4.90	40	40	5.60	45	45	6.30	50	45	6.93	50	45
Load current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]																																						
	Ripple-Noise [mV]	Ripple-Noise [mV]																																						
0.00	25	30																																						
0.70	35	30																																						
1.40	35	30																																						
2.10	35	35																																						
2.80	35	35																																						
3.50	40	40																																						
4.20	40	40																																						
4.90	40	40																																						
5.60	45	45																																						
6.30	50	45																																						
6.93	50	45																																						
<p>Ripple-Noise is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p>																																								
<p>リップルノイズは、下図 p - p 値で示される。</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>																																								
<p>T1: Due to AC Input Line 入力商用周期</p> <p>T2: Due to Switching スイッチング周期</p>																																								
<p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																								

**COSEL**

Model LDA75F-12

Item Overcurrent Protection  
過電流保護

Object +12.0V 6.3A

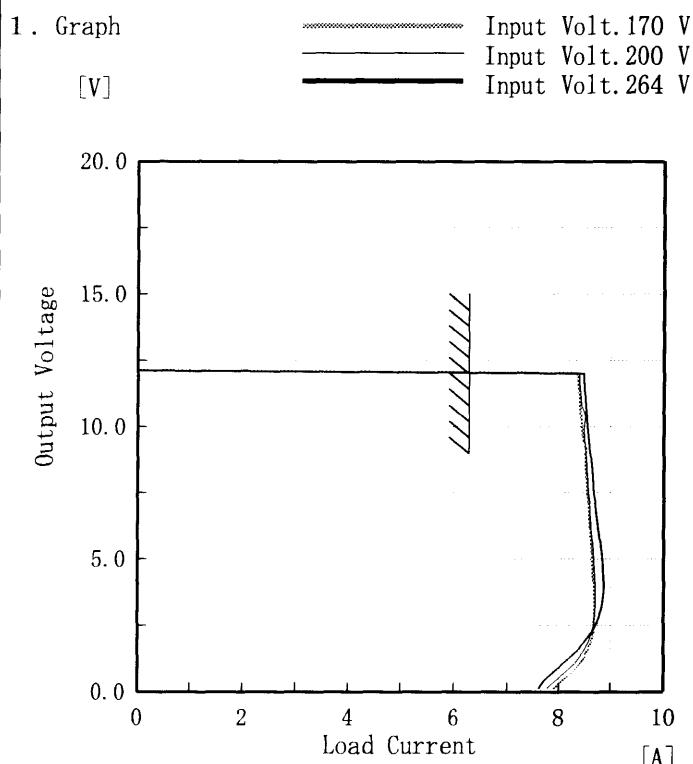Temperature 25°C  
Testing Circuitry Figure A

## 2. Values


Output Voltage [V]	Load Current [A]		
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
12.00	8.35	8.38	8.47
11.40	8.38	8.41	8.49
10.80	8.40	8.43	8.52
9.60	8.46	8.49	8.57
8.40	8.52	8.54	8.64
7.20	8.57	8.59	8.70
6.00	8.61	8.63	8.77
4.80	8.66	8.69	8.86
3.60	8.70	8.71	8.86
2.40	8.69	8.66	8.70
1.20	8.47	8.36	8.16
0.00	7.91	7.80	7.65

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

**COSEL**

Model	LDA75F-12
Item	Overvoltage Protection 過電圧保護
Object	+12.0V 6.3A

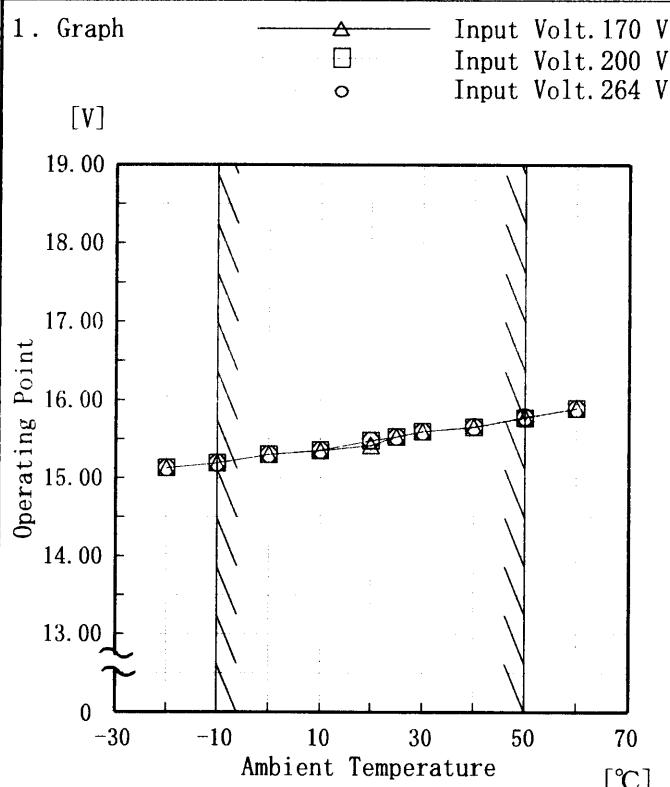

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。


Testing Circuitry Figure A

2. Values

Ambient Temp. [°C]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
	Operating Point [V]		
-20	15.13	15.13	15.13
-10	15.19	15.19	15.19
0	15.30	15.30	15.30
10	15.35	15.36	15.36
20	15.42	15.48	15.48
25	15.53	15.53	15.53
30	15.60	15.60	15.60
40	15.65	15.65	15.66
50	15.78	15.77	15.78
60	15.89	15.89	15.89
—	—	—	—

COSEL

Model	LDA75F-12	Temperature Testing Circuitry Figure A	25°C
Item	Inrush Current 突入電流		
Object	_____		

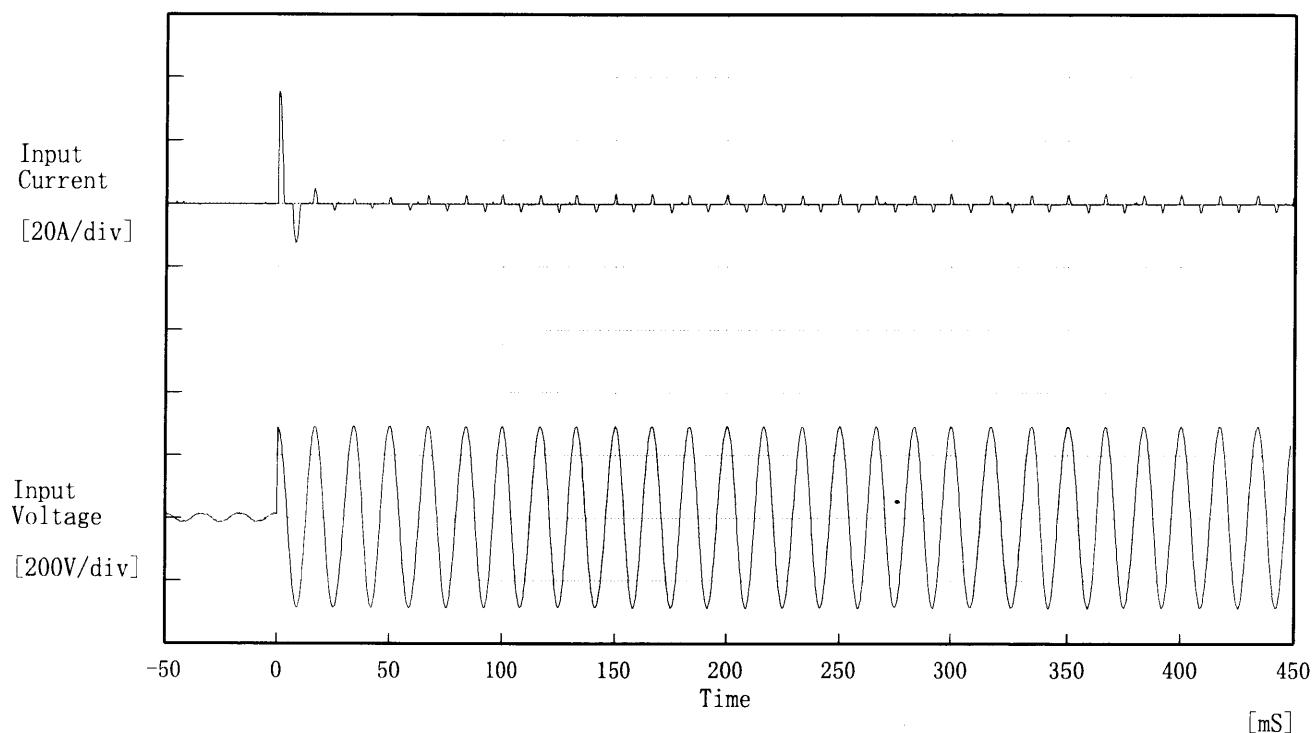

Input Voltage 200 V


Frequency 60 Hz


Load 100 %

Inrush Current

① 35.52 [A]

② 3.12 [A]

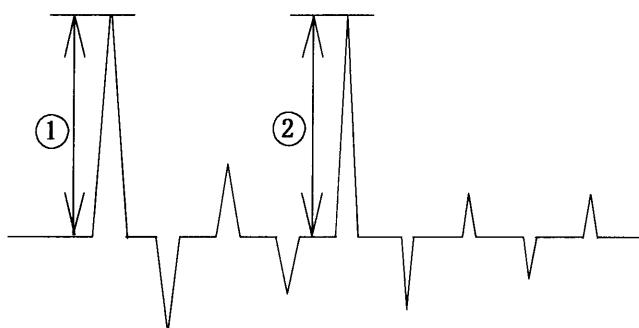

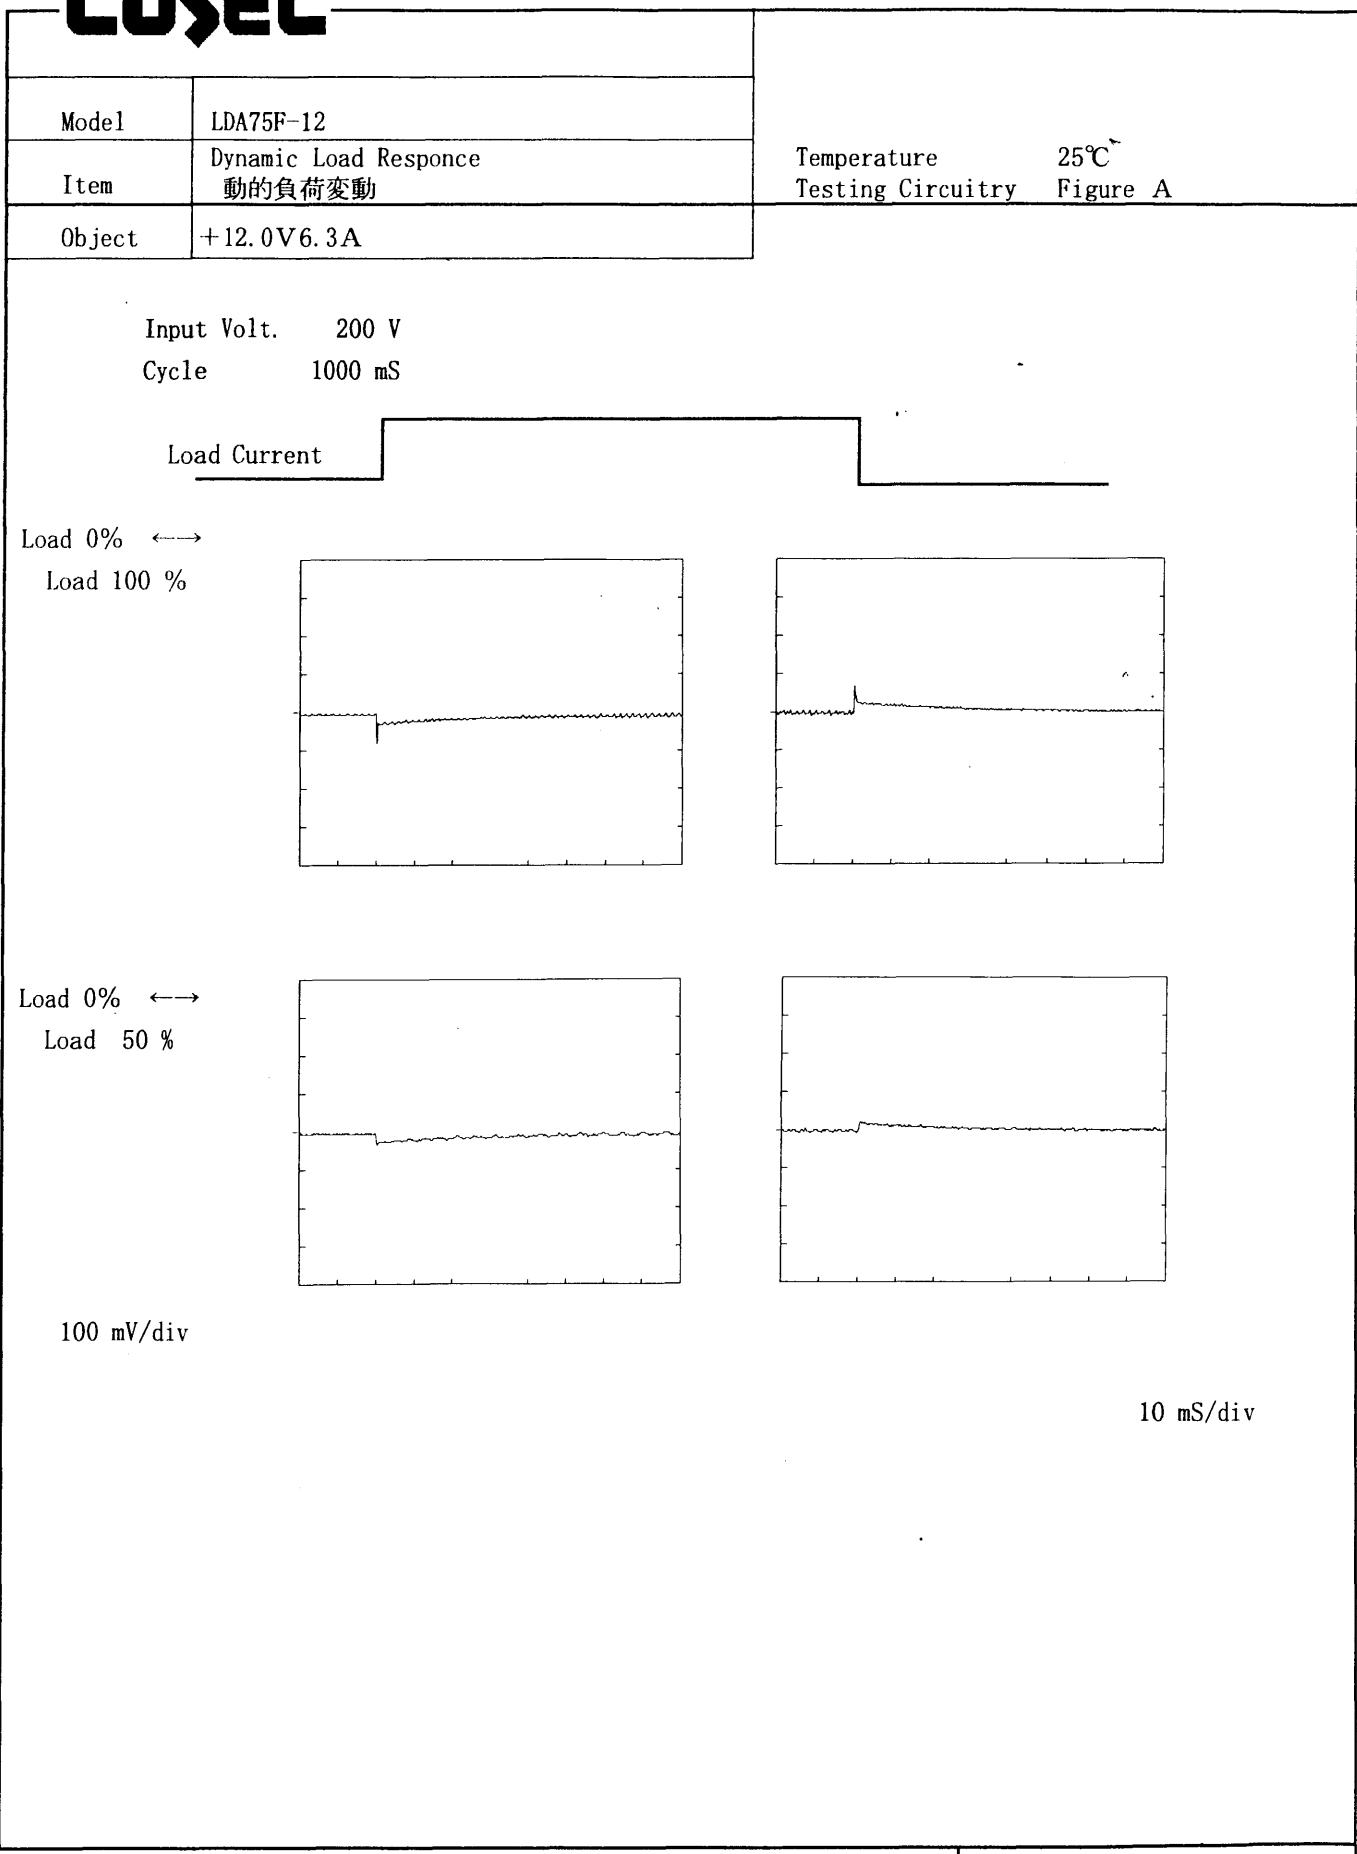**COSEL**

COSEL


Model LDA75F-12

Item Rise and Fall Time 立上り、立下り時間

Object +12.0V 6.3A


Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

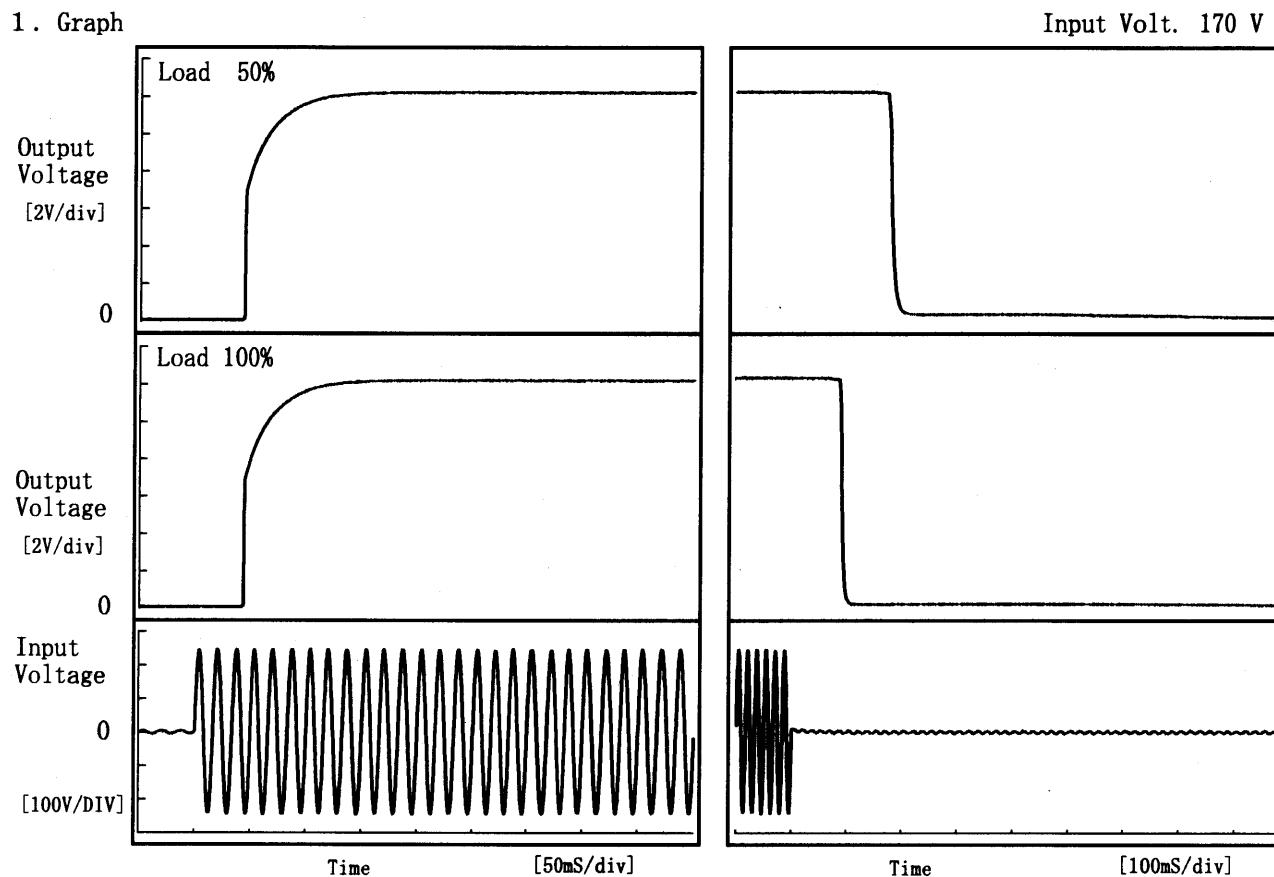

## 2. Values

Load	Time	T d	T r	T s	T h	T f	[mS]
50 %		42.8	35.0	77.8	180.0	13.0	
100 %		42.8	36.0	78.8	92.5	7.0	

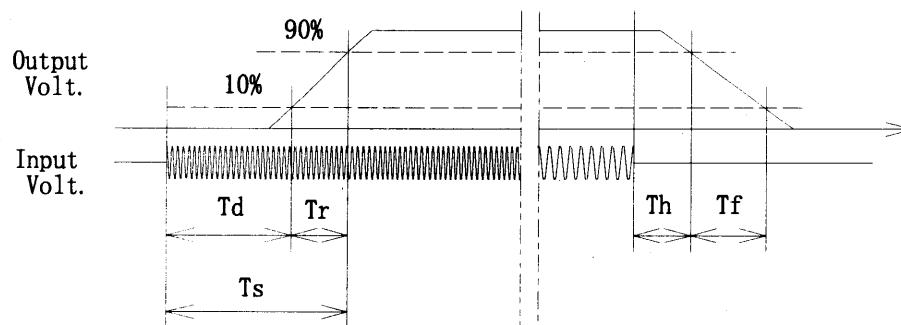

**COSSEL**

Model

LDA75F-12

Item


Ambient Temperature Drift  
周囲温度変動

Object

+12.0V 6.3A

1. Graph

- △ — Input Volt. 170V  
 — □ — Input Volt. 200V  
 — ○ — Input Volt. 264V

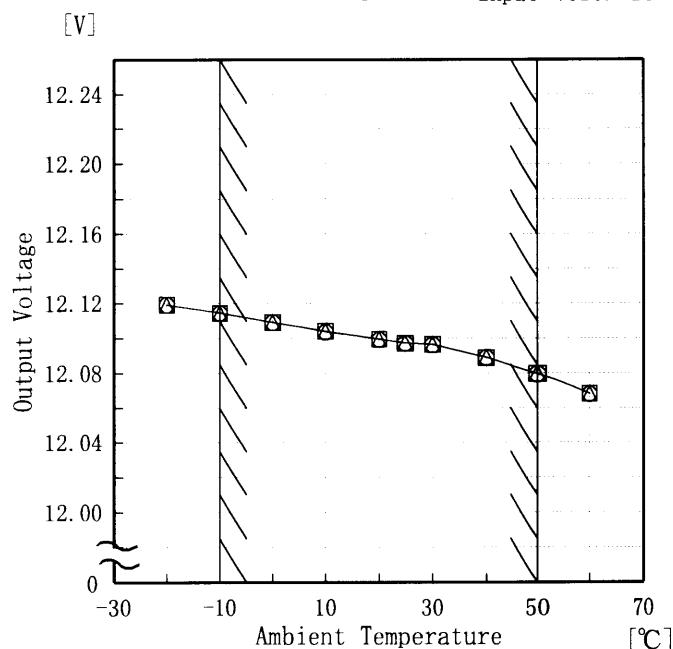

Load 100%

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A

2. Values

Temperature [°C]	Output Voltage [V]		
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
-20	12.119	12.119	12.119
-10	12.115	12.114	12.114
0	12.109	12.109	12.109
10	12.104	12.104	12.104
20	12.099	12.099	12.099
25	12.097	12.097	12.097
30	12.097	12.096	12.096
40	12.089	12.089	12.089
50	12.080	12.079	12.079
60	12.068	12.068	12.068
—	—	—	—




Model LDA75F-12

Item Minimum Input Voltage for Regulated Output Voltage  
最低レギュレーション電圧

Object +12.0V 6.3A

1. Graph

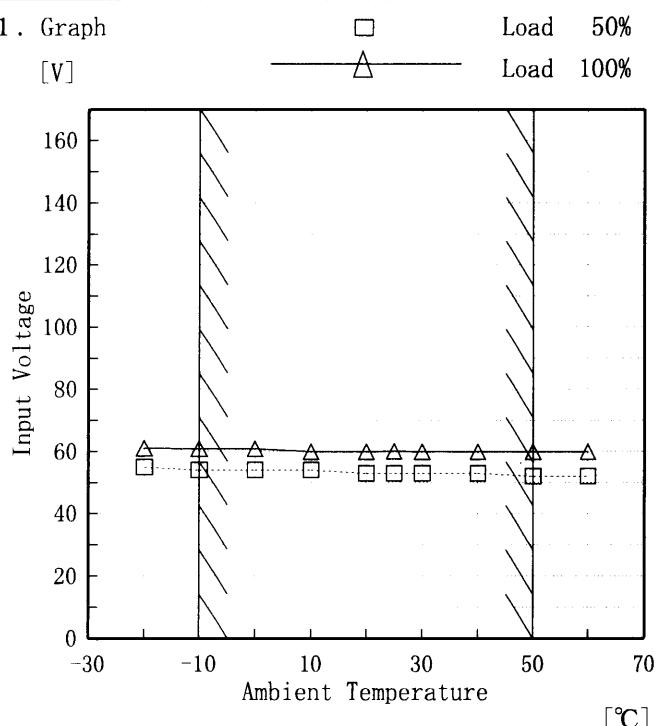

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-20	55	61
-10	54	61
0	54	61
10	54	60
20	53	60
25	53	60
30	53	60
40	53	60
50	52	60
60	52	60
—	—	—

**COSEL**

Model	LDA75F-12																																									
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)	Testing Circuitry      Figure A																																								
Object	+12.0V 6.3A																																									
1. Graph																																										
		□ Load 50%	△ Load 100%																																							
		[mV]																																								
		Ripple Voltage [mV]																																								
		-30 -10 10 30 50 70	Ambient Temperature [°C]																																							
Input Volt. 200 V																																										
Note: Slanted line shows the range of the rated ambient temperature.																																										
(注) 斜線は定格周囲温度範囲を示す。																																										
2. Values																																										
<table border="1"> <thead> <tr> <th>Ambient Temp. [°C]</th> <th>Load 50%</th> <th>Load 100%</th> </tr> <tr> <th></th> <th>Ripple Output Volt. [mV]</th> <th>Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>-20</td><td>55</td><td>55</td></tr> <tr><td>-10</td><td>45</td><td>45</td></tr> <tr><td>0</td><td>35</td><td>35</td></tr> <tr><td>10</td><td>30</td><td>30</td></tr> <tr><td>20</td><td>25</td><td>25</td></tr> <tr><td>25</td><td>25</td><td>25</td></tr> <tr><td>30</td><td>20</td><td>20</td></tr> <tr><td>40</td><td>15</td><td>15</td></tr> <tr><td>50</td><td>15</td><td>15</td></tr> <tr><td>60</td><td>15</td><td>15</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Ambient Temp. [°C]	Load 50%	Load 100%		Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	-20	55	55	-10	45	45	0	35	35	10	30	30	20	25	25	25	25	25	30	20	20	40	15	15	50	15	15	60	15	15	—	—	—
Ambient Temp. [°C]	Load 50%	Load 100%																																								
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																								
-20	55	55																																								
-10	45	45																																								
0	35	35																																								
10	30	30																																								
20	25	25																																								
25	25	25																																								
30	20	20																																								
40	15	15																																								
50	15	15																																								
60	15	15																																								
—	—	—																																								

**COSEL**


Model LDA75F-12

Item Time Lapse Drift 経時ドリフト

Object + 12.0 V 6.3 A

Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

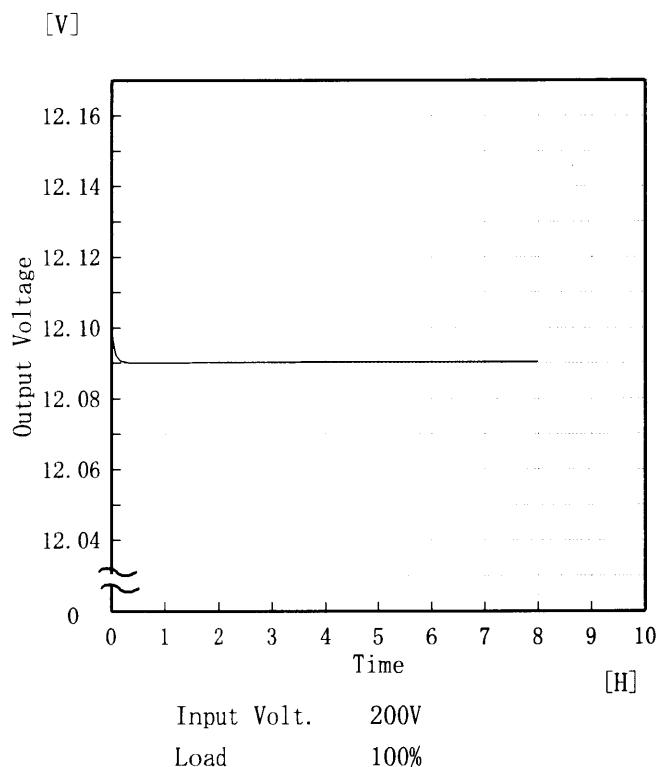

## 2. Values

Time since start [H]	Output Voltage [V]
0.0	12.101
0.5	12.090
1.0	12.090
2.0	12.090
3.0	12.090
4.0	12.090
5.0	12.090
6.0	12.090
7.0	12.090
8.0	12.090



Model	LDA75F-12	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+12.0V 6.3A	

#### Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 170~264 V

Load Current : 0~6.3 A

\* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage) / 2

$$* \text{ Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

#### 定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 170~264 V

負荷電流 0~6.3 A

\* 定電圧精度(変動値) = ±(出力電圧の最高値-出力電圧の最低値) / 2

$$* \text{ 定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ration) [%]
Maximum Voltage	-10	264	0.0	12.121	±22	±0.2
Minimum Voltage	50	264	6.3	12.077		



Model	LDA75F-12	Testing Circuitry Figure A
Item	Condensation 結露特性	
Object	+12.0V 6.3A	

### 1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

### 1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

### 2. Values

Item	Data	Testing Conditions
Output Voltage [V]	12.099	Input Volt.: 200V, Load Current: 6.3A
Line Regulation [mV]	7	Input Volt.: 170~264V, Load Current: 6.3A
Load Regulation [mV]	10	Input Volt.: 200V, Load Current: 0.0~6.3A



Model	LDA75F-12		
Item	Leakage Current 漏洩電流	Temperature 25°C	Testing Circuitry Figure B
Object	_____		

### 1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	—	—	—
(B) IEC60950	—	—	—

### 2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力の両相について測定し、その大きい方を漏洩電流測定値とする。

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	0.34	0.41	0.45



Model	LDA75F-12	Temperature Testing Circuitry	25°C Figure C
Item	Line Noise Tolerance 入力雑音耐量		
Object	+12.0V 6.3A		

### 1. Results

Pulse Width [ nS ]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

### 2. Conditions

Input Voltage : 200 V  
 Pulse Voltage : 2000 V  
 Pulse Cycle : 10 mS  
 Pulse Input Duration : 1 min. or more  
 Load : 100 %

**COSEL**

Model

LDA75F-12

Item

Conducted Emission  
雜音端子電圧Temperature  
Testing Circuitry25°C  
Figure D

Object


## 1. Graph

## Remarks

Input Volt. 230 V

Load 100 %

規格 1 : [EN 55022] Class B(QP)  
 規格 2 : [EN 55022] Class B(平均値)

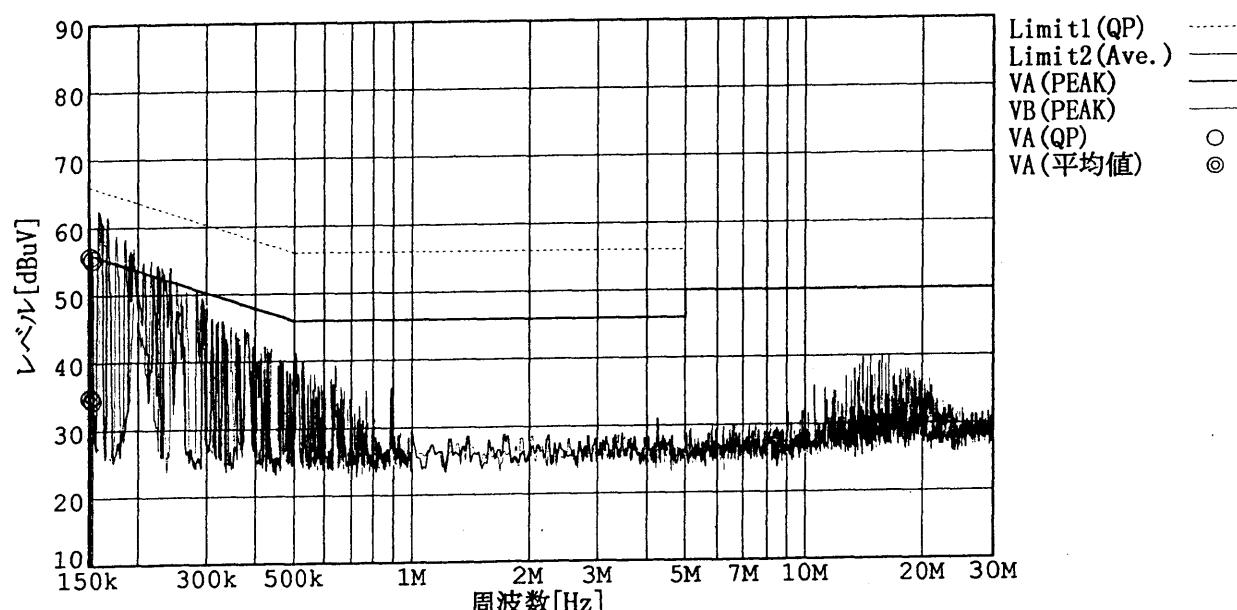

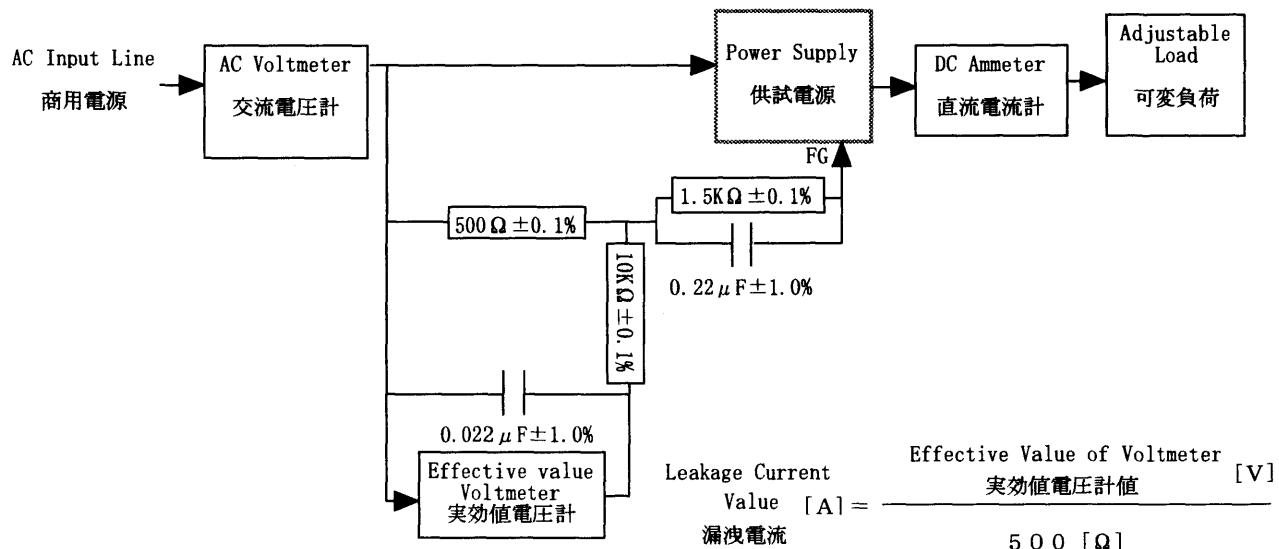
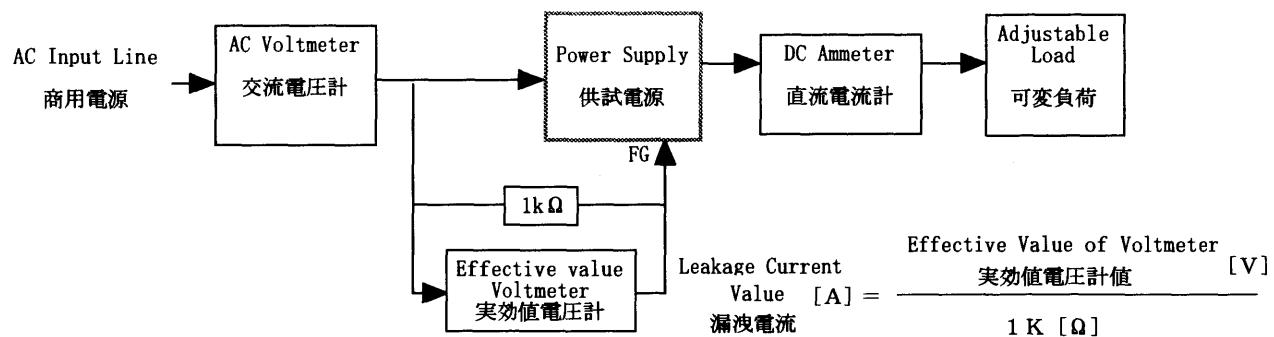
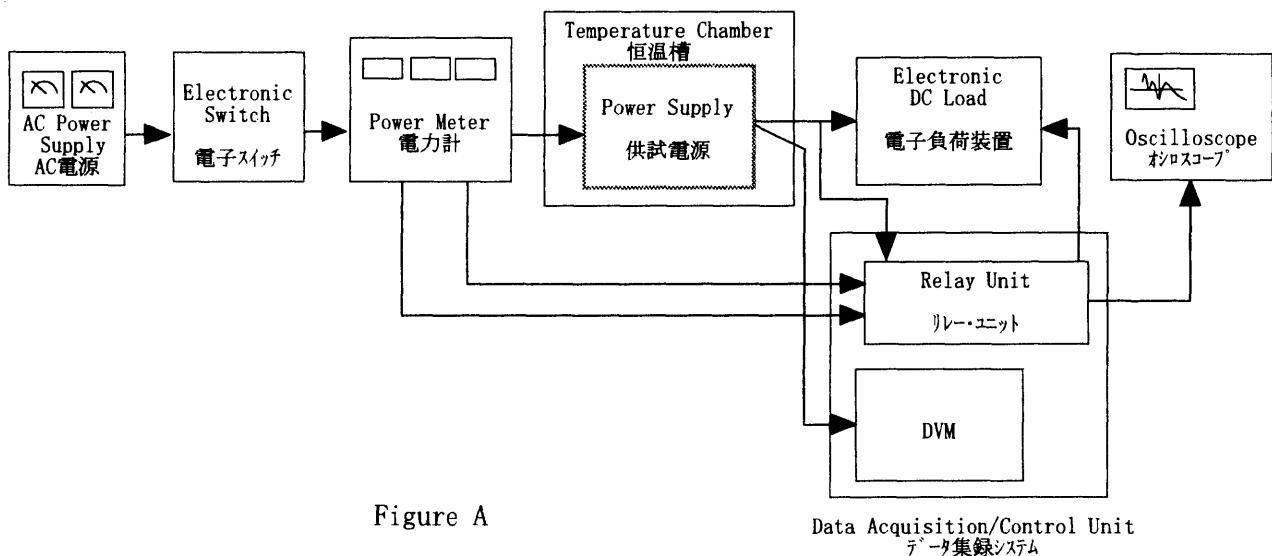


Figure B (IEC 60950)

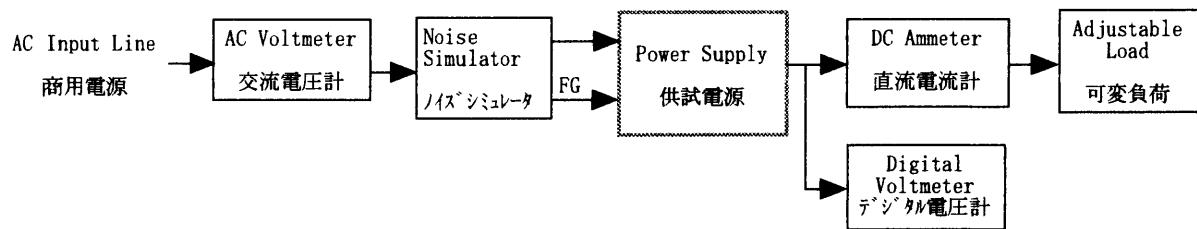


Figure C

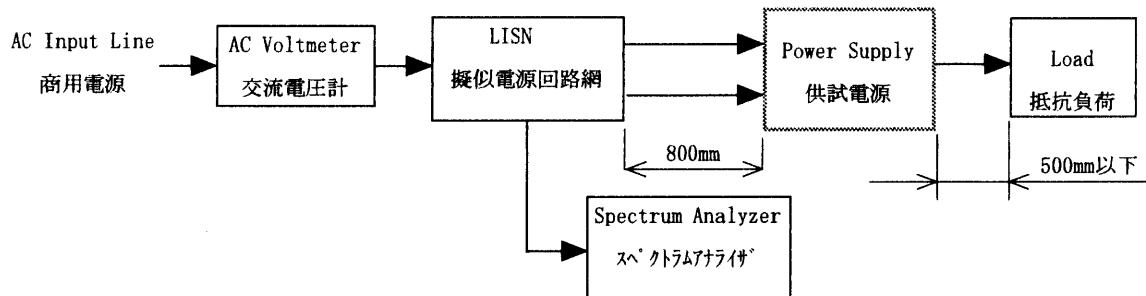


Figure D

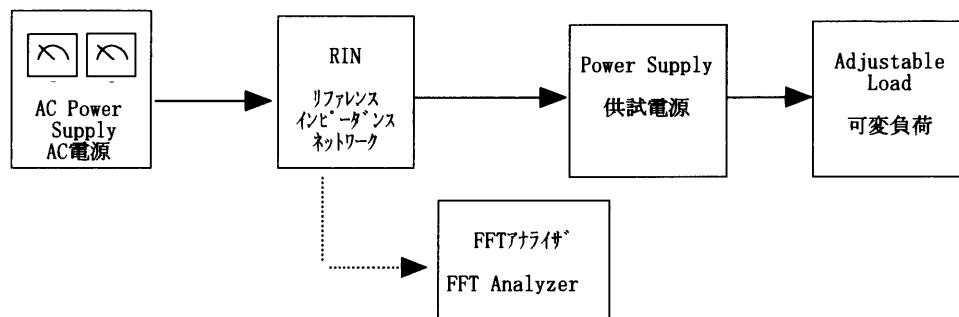


Figure E