


RADIATED EMISSION

Model Name :LDA75F-3
 Model No. :
 Serial No. :
 Points :3
 Detector :PEAK/QP
 Polarization :Hori.&Vert.
 Limit:[CISPR 22] Class B<3m>

Power Supply :230V(1 Phase) 50Hz
 Temp. :25degC
 Humi. :44%
 Date :2001/7/13
 Test Equip. :R3132,ESPC
 Comment :

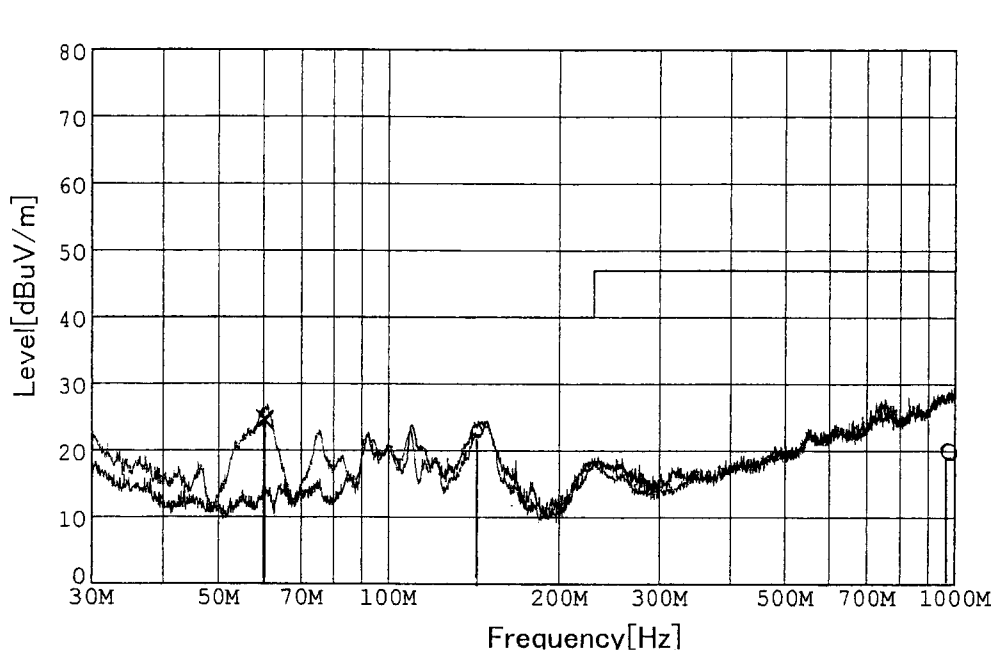

Frequency [MHz]	Meter Reading (QP) [dBuV]	Antenna Factor [dBuV]	Cable & Preamp [dB]	Level (Qp) [dBuV]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
144.370	45.2	10.7	-31.4	24.5	103	146	Hori.	40.0	15.5
964.201	24.3	25.2	-29.2	20.3	284	109	Hori.	47.0	26.7
60.703	52.1	4.7	-31.9	24.9	5	118	Vert.	40.0	15.1



LINE CONDUCTION

Model Name :LDA75F-3

Model No. :

Serial No. :

Points :16

Detector :PEAK/QP/Ave.

Line Mode :VA/VB

Limit1:[CISPR Pub22] Class B(QP)

Limit2:[CISPR Pub22] Class B(Ave.)

Power Supply :230V(1 Phase) 50Hz


Temp. :25degC

Humi. :44%

Date :2001/7/12

Test Equip. :R3132,ESPC

Comment :

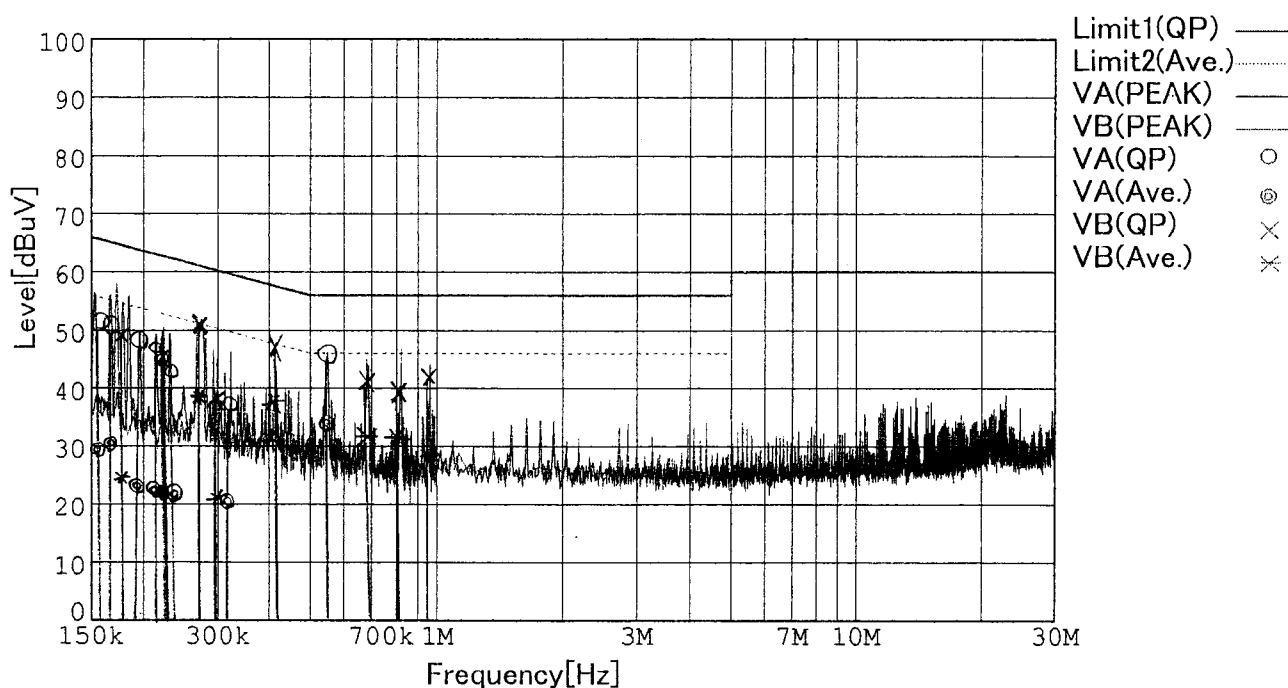

Frequency [MHz]	Meter Reading (QP) [dBuV]	Meter Reading (Ave.) [dBuV]	Factor [dB]	Level (QP) [dBuV]	Level (Ave.) [dBuV]	Line	Limit (QP) [dBuV]	Limit (Ave.) [dBuV]	Margin (QP) [dB]	Margin (Ave.) [dB]
0.1575	41.5	19.3	9.8	51.3	29.1	VA	65.6	55.6	14.3	26.5
0.1640	40.6	20.1	9.8	50.4	29.9	VA	65.3	55.3	14.9	25.4
0.1884	37.3	13.8	9.8	47.1	23.6	VA	64.1	54.1	17.0	30.5
0.2030	35.9	12.9	9.8	45.7	22.7	VA	63.5	53.5	17.8	30.8
0.2150	34.7	12.6	9.8	44.5	22.4	VA	63.0	53.0	18.5	30.6
0.2343	33.1	12.1	9.8	42.9	21.9	VA	62.3	52.3	19.4	30.4
0.3198	25.8	10.5	9.8	35.6	20.3	VA	59.7	49.7	24.1	29.4
0.5446	35.2	23.8	9.8	45.0	33.6	VA	56.0	46.0	11.0	12.4
0.1746	39.2	14.9	9.8	49.0	24.7	VB	64.7	54.7	15.7	30.0
0.2208	34.7	12.3	9.8	44.5	22.1	VB	62.8	52.8	18.3	30.7
0.2723	41.1	29.0	9.8	50.9	38.8	VB	61.1	51.1	10.2	12.3
0.3031	27.7	10.8	9.8	37.5	20.6	VB	60.2	50.2	22.7	29.6
0.4079	38.1	26.9	9.8	47.9	36.7	VB	57.7	47.7	9.8	11.0
0.6815	31.0	22.6	9.8	40.8	32.4	VB	56.0	46.0	15.2	13.6
0.8152	29.7	21.4	9.8	39.6	31.3	VB	56.0	46.0	16.4	14.7
0.9525	31.3	19.5	9.8	41.2	29.4	VB	56.0	46.0	14.8	16.6