


RADIATED EMISSION

Model Name :LDA75F-9
 Model No. :
 Serial No. :
 Points :2
 Detector :PEAK/QP
 Polarization :Hori.&Vert.
 Limit:[CISPR 22] Class B<3m>

Power Supply :230V(1 Phase) 50Hz
 Temp. :25degC
 Humi. :44%
 Date :2001/7/12
 Test Equip. :R3132,ESPC
 Comment :

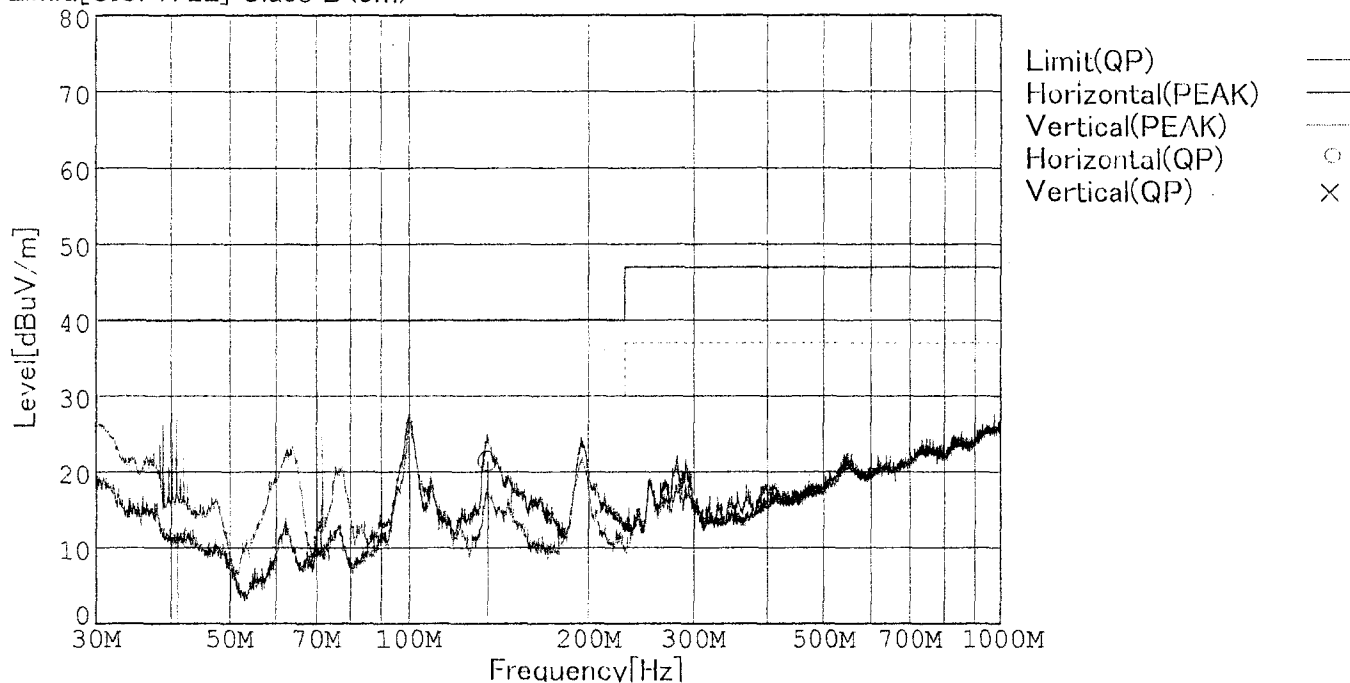


Frequency [MHz]	Meter Reading (QP) [dBuV]	Antena Factor [dBuV]	Cable & Preamp [dB]	Level (Qp) [dBuV]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
135.310	41.8	11.0	-31.4	21.4	268	144	Hori.	40.0	18.6
41.122	30.8	12.4	-32.0	11.2	227	114	Vert.	40.0	28.8



LINE CONDUCTION

Model Name : LDA75F-9
 Model No. :
 Serial No. :
 Points : 11
 Detector : PEAK/QP/Ave.
 Line Mode : VA/VB
 Limit1:[CISPR Pub22] Class B(QP)
 Limit2:[CISPR Pub22] Class B(Ave.)

Power Supply : 230V(1 Phase) 50Hz
 Temp. : 25degC
 Humi. : 44%
 Date : 2001/7/12
 Test Equip. : R3132,ESPC
 Comment :

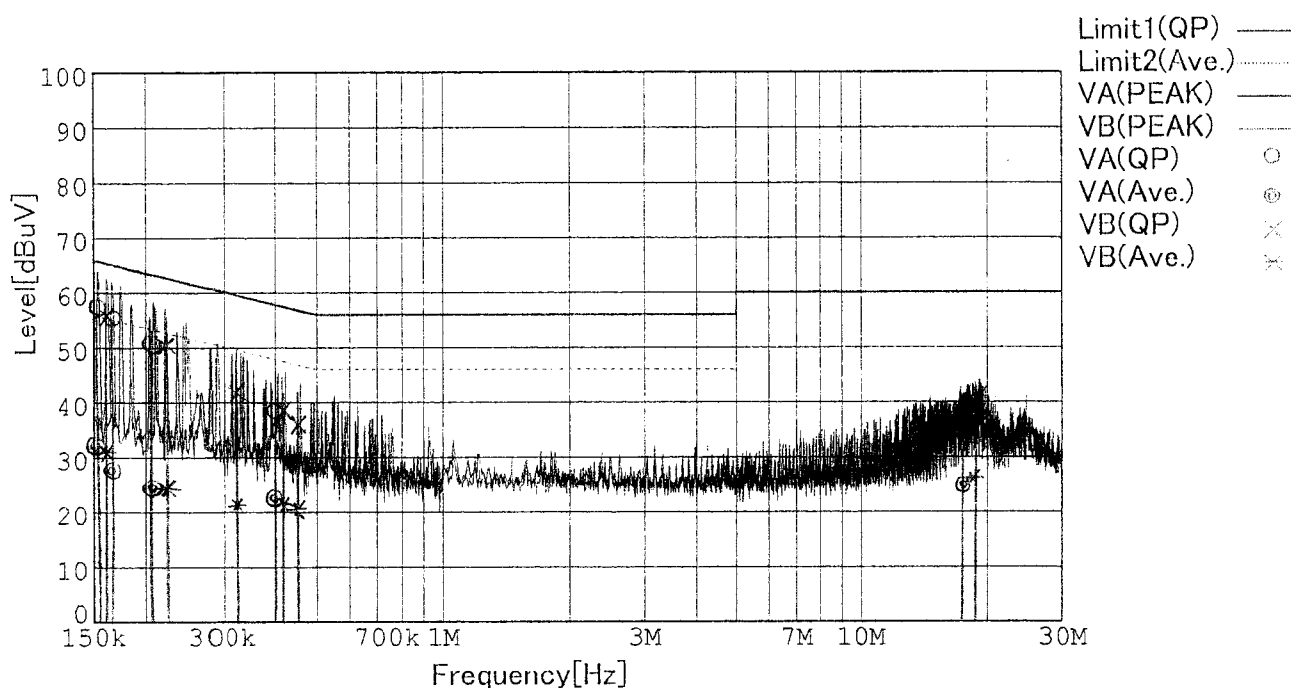

Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level (Ave.) [dBuV]	Level (QP) [dBuV]	Line	Limit (Ave.) [dBuV]	Limit (QP) [dBuV]	Margin (Ave.) [dB]	Margin (QP) [dB]
0.1508	21.9	47.6	9.8	31.7	57.4	VA	56.0	66.0	24.3	8.6
0.1716	17.6	44.8	9.8	27.4	54.6	VA	54.9	64.9	27.5	10.3
0.2077	14.6	41.0	9.8	24.4	50.8	VA	53.3	63.3	28.9	12.5
0.4028	12.6	28.0	9.8	22.4	37.8	VA	47.8	57.8	25.4	20.0
18.0518	14.9	30.2	10.2	25.1	40.4	VA	50.0	60.0	24.9	19.6
0.1599	21.1	46.2	9.8	30.9	56.0	VB	55.5	65.5	24.6	9.5
0.2157	14.1	40.3	9.8	23.9	50.1	VB	53.0	63.0	29.1	12.9
0.3276	11.1	32.2	9.8	20.9	42.0	VB	49.5	59.5	28.6	17.5
0.4197	10.8	27.6	9.8	20.6	37.4	VB	47.5	57.5	26.9	20.1
0.4569	10.2	25.8	9.8	20.0	35.6	VB	46.8	56.8	26.8	21.2
18.4901	16.1	30.9	10.2	26.3	41.1	VB	50.0	60.0	23.7	18.9