



TEST DATA OF LEA100F-15 (200V INPUT)

Regulated DC Power Supply

Date : Feb. 9. 1999

Approved by : T. Watanabe
Design Manager

Prepared by : T. Miura
Design Engineer

コーセル株式会社
COSEL CO.,LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Input Current (by Load Current)	2
入力電流 (負荷特性)	
3. Input Power (by Load Current)	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage)	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current)	5
効率 (負荷特性)	
6. Power Factor (by Input Voltage)	6
力率 (入力電圧特性)	
7. Power Factor (by Load Current)	7
力率 (負荷特性)	
8. Hold-Up Time	8
出力保持時間	
9. Instantaneous Interruption Compensation	9
瞬時停電保障	
10. Load Regulation	10
静的負荷変動	
11. Ripple Voltage (by Load Current)	11
リップル電圧 (負荷特性)	
12. Ripple-Noise	12
リップルノイズ	
13. Overcurrent Protection	13
過電流保護	
14. Overvoltage Protection	14
過電圧保護	
15. Inrush Current	15
突入電流	
16. Dynamic Load Responce	16
動的負荷変動	
17. Rise and Fall Time	17
立上り、立下がり時間	
18. Ambient Temperature Drift	18
周囲温度変動	
19. Minimum Input Voltage for Regulated Output Voltage	19
最低レギュレーション電圧	
20. Ripple Voltage (by Ambient Temperature)	20
リップル電圧 (周囲温度特性)	
21. Time Lapse Drift	21
経時ドリフト	
22. Output Voltage Accuracy	22
定電圧精度	
23. Harmonic Current	23
高調波電流	
24. Condensation	25
結露特性	
25. Leakage Current	26
漏洩電流	
26. Line Noise Tolerance	27
入力雑音耐量	
27. Conducted Emission	28
雑音端子電圧	
28. Figure of Testing Circuitry	29
測定回路図	

COSEL

Model		LEA100F-15	Temperature25℃ Testing CircuitryFigure A																															
Item		Line Regulation 静的入力変動																																
Object		+15V6.7A																																
1. Graph		<div><div>-----□-----Load 50%</div><div>-----△-----Load 100%</div></div> <div><div>Output Voltage</div><div>[V]</div><div><div>15.20</div><div>15.18</div><div>15.16</div><div>15.14</div><div>15.12</div><div>15.10</div><div>15.08</div><div>0</div></div><div><div>0</div><div>160</div><div>180</div><div>200</div><div>220</div><div>240</div><div>260</div><div>280</div><div>300</div></div><div><div>Input Voltage</div><div>[V]</div></div><div></div></div> <div><div>Note: Slanted line shows the range of the rated input voltage.</div><div>(注)斜線は定格入力電圧範囲を示す。</div></div>	2. Values																															
		<table><tr><th rowspan="2">Input Voltage [V]</th><th>Load 50%</th><th>Load 100%</th></tr><tr><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>150</td><td>15.132</td><td>15.129</td></tr><tr><td>160</td><td>15.132</td><td>15.129</td></tr><tr><td>170</td><td>15.132</td><td>15.129</td></tr><tr><td>180</td><td>15.132</td><td>15.129</td></tr><tr><td>200</td><td>15.132</td><td>15.129</td></tr><tr><td>220</td><td>15.132</td><td>15.129</td></tr><tr><td>240</td><td>15.132</td><td>15.129</td></tr><tr><td>264</td><td>15.132</td><td>15.129</td></tr><tr><td>280</td><td>15.132</td><td>15.129</td></tr></table>	Input Voltage [V]	Load 50%	Load 100%	Output Volt. [V]	Output Volt. [V]	150	15.132	15.129	160	15.132	15.129	170	15.132	15.129	180	15.132	15.129	200	15.132	15.129	220	15.132	15.129	240	15.132	15.129	264	15.132	15.129	280	15.132	15.129
Input Voltage [V]	Load 50%	Load 100%																																
	Output Volt. [V]	Output Volt. [V]																																
150	15.132	15.129																																
160	15.132	15.129																																
170	15.132	15.129																																
180	15.132	15.129																																
200	15.132	15.129																																
220	15.132	15.129																																
240	15.132	15.129																																
264	15.132	15.129																																
280	15.132	15.129																																

BC-3165

COSEL

Model		LEA100F-15		Temperature Testing Circuitry	25℃ Figure A
Item		Input Power (by Load Current) 入力電力 (負荷特性)			
Output		_____			

1. Graph

—△—

Input Volt. 170V

---□---

Input Volt. 200V

---○---

Input Volt. 264V

[W]

200

150

100

50

0

0

2

4

6

8

Load Current

[A]

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。


2. Values

Load Current	Input Power [W]		
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
0.00	5.40	5.50	8.60
1.00	25.20	25.20	25.50
2.00	42.40	42.30	42.40
3.00	59.60	59.40	59.20
4.00	76.80	76.40	76.10
5.00	94.50	93.90	93.40
6.00	111.80	111.20	110.40
6.70	123.90	123.20	122.20
7.37	136.40	135.50	134.40
—	—	—	—
—	—	—	—
—	—	—	—

COSEL

Model		LEA100F-15		Temperature		25℃																															
Item		Efficiency (by Input Voltage) 効率 (入力電圧特性)		Testing Circuitry		Figure A																															
Object																																					
1. Graph				2. Values																																	
<div><div>-----□----- Load 50%</div><div>-----△----- Load 100%</div><p>Efficiency [%]</p><p>Input Voltage [V]</p><p>Note: Slanted line shows the range of the rated input voltage.</p><p>(注)斜線は定格入力電圧範囲を示す。</p></div>				<table><tr><th>Input Voltage [V]</th><th>Load 50% Efficiency [%]</th><th>Load 100% Efficiency [%]</th></tr><tr><td>150</td><td>77.7</td><td>81.7</td></tr><tr><td>160</td><td>77.9</td><td>82.0</td></tr><tr><td>170</td><td>78.1</td><td>82.2</td></tr><tr><td>180</td><td>78.2</td><td>82.4</td></tr><tr><td>200</td><td>78.3</td><td>82.8</td></tr><tr><td>220</td><td>78.4</td><td>83.0</td></tr><tr><td>240</td><td>78.5</td><td>83.3</td></tr><tr><td>264</td><td>78.5</td><td>83.4</td></tr><tr><td>280</td><td>76.0</td><td>83.3</td></tr></table>				Input Voltage [V]	Load 50% Efficiency [%]	Load 100% Efficiency [%]	150	77.7	81.7	160	77.9	82.0	170	78.1	82.2	180	78.2	82.4	200	78.3	82.8	220	78.4	83.0	240	78.5	83.3	264	78.5	83.4	280	76.0	83.3
Input Voltage [V]	Load 50% Efficiency [%]	Load 100% Efficiency [%]																																			
150	77.7	81.7																																			
160	77.9	82.0																																			
170	78.1	82.2																																			
180	78.2	82.4																																			
200	78.3	82.8																																			
220	78.4	83.0																																			
240	78.5	83.3																																			
264	78.5	83.4																																			
280	76.0	83.3																																			

COSEL

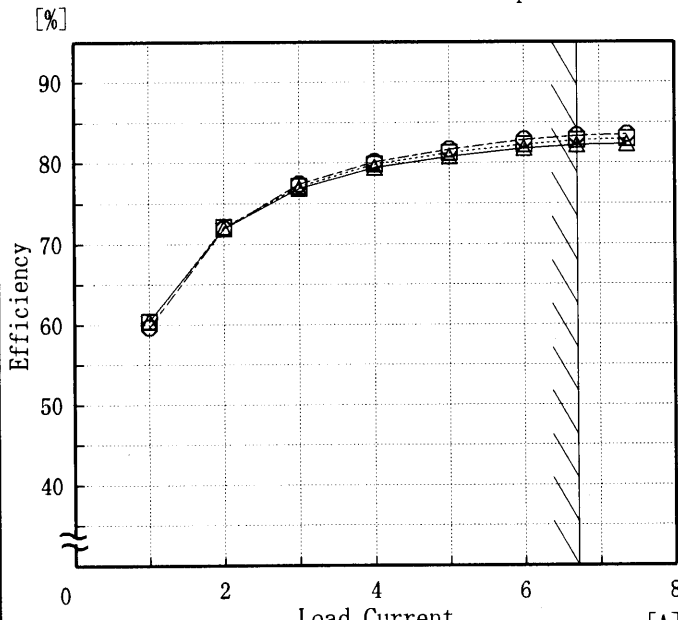Model		LEA100F-15		Temperature		25℃																																																								
Item		Efficiency (by Load Current) 効率 (負荷電流特性)		Testing Circuitry		Figure A																																																								
Output		_____																																																												
1. Graph				2. Values																																																										
<div><div>—△—</div>Input Volt. 170V</div>																																																														
<div>---□---</div> Input Volt. 200V																																																														
<div>---○---</div> Input Volt. 264V																																																														
																																																														
Note: Slanted line shows the range of the rated load current																																																														
(注)斜線は定格負荷電流範囲を示す。																																																														
				<table><tr><th rowspan="2">Load Current</th><th colspan="3">Efficiency [%]</th></tr><tr><th>Input Volt. 170[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 264[V]</th></tr><tr><td>1.00</td><td>60.4</td><td>60.4</td><td>59.7</td></tr><tr><td>2.00</td><td>71.9</td><td>72.1</td><td>71.9</td></tr><tr><td>3.00</td><td>76.9</td><td>77.1</td><td>77.4</td></tr><tr><td>4.00</td><td>79.4</td><td>79.8</td><td>80.1</td></tr><tr><td>5.00</td><td>80.8</td><td>81.3</td><td>81.7</td></tr><tr><td>6.00</td><td>81.8</td><td>82.3</td><td>82.8</td></tr><tr><td>6.70</td><td>82.2</td><td>82.8</td><td>83.4</td></tr><tr><td>7.37</td><td>82.3</td><td>83.0</td><td>83.5</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current	Efficiency [%]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	1.00	60.4	60.4	59.7	2.00	71.9	72.1	71.9	3.00	76.9	77.1	77.4	4.00	79.4	79.8	80.1	5.00	80.8	81.3	81.7	6.00	81.8	82.3	82.8	6.70	82.2	82.8	83.4	7.37	82.3	83.0	83.5	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current	Efficiency [%]																																																													
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																											
1.00	60.4	60.4	59.7																																																											
2.00	71.9	72.1	71.9																																																											
3.00	76.9	77.1	77.4																																																											
4.00	79.4	79.8	80.1																																																											
5.00	80.8	81.3	81.7																																																											
6.00	81.8	82.3	82.8																																																											
6.70	82.2	82.8	83.4																																																											
7.37	82.3	83.0	83.5																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											

—6—

BC-3165

COSEL

Model		LEA100F-15	Temperature Testing Circuitry	25℃ Figure A																																
Item		Hold-Up Time 出力保持時間																																		
Object		+15V6.7A																																		
1. Graph																																				
<div><div><div>—△—</div><div>Load 50%</div></div><div><div>- -□- -</div><div>Load 100%</div></div></div> <div><div>Hold-Up Time [mS]</div><div><div>1000</div><div>100</div><div>10</div><div>1</div></div><div><div>0 160 180 200 220 240 260 280 300</div><div>Input Voltage [V]</div></div></div>																																				
2. Values																																				
<table><tr><th rowspan="2">Input Voltage [V]</th><th>Load 50%</th><th>Load 100%</th></tr><tr><th>Hold-Up Time [mS]</th><th>Hold-Up Time [mS]</th></tr><tr><td>150</td><td>78</td><td>37</td></tr><tr><td>160</td><td>78</td><td>38</td></tr><tr><td>170</td><td>79</td><td>38</td></tr><tr><td>180</td><td>79</td><td>39</td></tr><tr><td>200</td><td>80</td><td>39</td></tr><tr><td>220</td><td>81</td><td>40</td></tr><tr><td>240</td><td>81</td><td>40</td></tr><tr><td>264</td><td>82</td><td>40</td></tr><tr><td>280</td><td>82</td><td>41</td></tr></table>					Input Voltage [V]	Load 50%	Load 100%	Hold-Up Time [mS]	Hold-Up Time [mS]	150	78	37	160	78	38	170	79	38	180	79	39	200	80	39	220	81	40	240	81	40	264	82	40	280	82	41
Input Voltage [V]	Load 50%	Load 100%																																		
	Hold-Up Time [mS]	Hold-Up Time [mS]																																		
150	78	37																																		
160	78	38																																		
170	79	38																																		
180	79	39																																		
200	80	39																																		
220	81	40																																		
240	81	40																																		
264	82	40																																		
280	82	41																																		
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>																																				

COSEL

Model		LEA100F-15		Temperature		25℃																																																				
Item		Instantaneous Interruption Compensation 瞬時停電保障		Testing Circuitry		Figure A																																																				
Object		+15V6.7A																																																								
1. Graph				2. Values																																																						
<div><div><div>—△—</div><div>—□—</div><div>—○—</div></div><div><div>Input Volt. 170 V</div><div>Input Volt. 200 V</div><div>Input Volt. 264 V</div></div></div> <div><div>Instantaneous Compensation Time [mS]</div><div><div>1000</div><div>100</div><div>10</div><div>1</div></div><div><div>0</div><div>2</div><div>4</div><div>6</div><div>8</div></div><div>Load Current [A]</div></div> <div><div>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</div><div>Note:Slanted line shows the range of the rated load current.</div></div> <div><div>瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。</div><div>(注)斜線は定格負荷電流範囲を示す。</div></div>				<table><tr><th rowspan="2">Load Current [A]</th><th>Input Volt. 170[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 264[V]</th></tr><tr><th colspan="3">Time [mS]</th></tr><tr><td>0.00</td><td>—</td><td>—</td><td>—</td></tr><tr><td>1.00</td><td>224</td><td>230</td><td>236</td></tr><tr><td>2.00</td><td>122</td><td>127</td><td>131</td></tr><tr><td>3.00</td><td>80</td><td>85</td><td>89</td></tr><tr><td>4.00</td><td>59</td><td>63</td><td>67</td></tr><tr><td>5.00</td><td>48</td><td>51</td><td>54</td></tr><tr><td>6.00</td><td>41</td><td>43</td><td>45</td></tr><tr><td>6.70</td><td>37</td><td>39</td><td>40</td></tr><tr><td>7.37</td><td>33</td><td>35</td><td>36</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	Time [mS]			0.00	—	—	—	1.00	224	230	236	2.00	122	127	131	3.00	80	85	89	4.00	59	63	67	5.00	48	51	54	6.00	41	43	45	6.70	37	39	40	7.37	33	35	36	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																							
	Time [mS]																																																									
0.00	—	—	—																																																							
1.00	224	230	236																																																							
2.00	122	127	131																																																							
3.00	80	85	89																																																							
4.00	59	63	67																																																							
5.00	48	51	54																																																							
6.00	41	43	45																																																							
6.70	37	39	40																																																							
7.37	33	35	36																																																							
—	—	—	—																																																							
—	—	—	—																																																							

COSEL

Model	LEA100F-15	Temperature	25°C																																												
Item	Load Regulation 静的負荷変動	Testing Circuitry	Figure A																																												
Object	+15V6.7A	2. Values																																													
1. Graph	<div> <div>—△—</div>Input Volt. 170V <div>---□---</div>Input Volt. 200V <div>---○---</div>Input Volt. 264V </div> <p>Note: Slanted line shows the range of the rated load current.</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>																																														
		<table> <tr> <th>Load Current [A]</th><th>Input Volt. 170[V] Output Volt. [V]</th><th>Input Volt. 200[V] Output Volt. [V]</th><th>Input Volt. 264[V] Output Volt. [V]</th></tr> <tr><td>0.00</td><td>15.137</td><td>15.137</td><td>15.136</td></tr> <tr><td>1.00</td><td>15.135</td><td>15.135</td><td>15.135</td></tr> <tr><td>2.00</td><td>15.134</td><td>15.134</td><td>15.134</td></tr> <tr><td>3.00</td><td>15.133</td><td>15.133</td><td>15.133</td></tr> <tr><td>4.00</td><td>15.133</td><td>15.132</td><td>15.132</td></tr> <tr><td>5.00</td><td>15.132</td><td>15.131</td><td>15.131</td></tr> <tr><td>6.00</td><td>15.131</td><td>15.131</td><td>15.130</td></tr> <tr><td>6.70</td><td>15.130</td><td>15.130</td><td>15.130</td></tr> <tr><td>7.37</td><td>15.130</td><td>15.129</td><td>15.129</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </table>		Load Current [A]	Input Volt. 170[V] Output Volt. [V]	Input Volt. 200[V] Output Volt. [V]	Input Volt. 264[V] Output Volt. [V]	0.00	15.137	15.137	15.136	1.00	15.135	15.135	15.135	2.00	15.134	15.134	15.134	3.00	15.133	15.133	15.133	4.00	15.133	15.132	15.132	5.00	15.132	15.131	15.131	6.00	15.131	15.131	15.130	6.70	15.130	15.130	15.130	7.37	15.130	15.129	15.129	—	—	—	—
Load Current [A]	Input Volt. 170[V] Output Volt. [V]	Input Volt. 200[V] Output Volt. [V]	Input Volt. 264[V] Output Volt. [V]																																												
0.00	15.137	15.137	15.136																																												
1.00	15.135	15.135	15.135																																												
2.00	15.134	15.134	15.134																																												
3.00	15.133	15.133	15.133																																												
4.00	15.133	15.132	15.132																																												
5.00	15.132	15.131	15.131																																												
6.00	15.131	15.131	15.130																																												
6.70	15.130	15.130	15.130																																												
7.37	15.130	15.129	15.129																																												
—	—	—	—																																												

COSEL

Model		LEA100F-15	
Item		Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)	
Object		+15V 6.7A	

1. Graph

-----□----- Input Volt. 170V

-----△----- Input Volt. 264V

[mV]

Ripple Voltage

Load Current [A]

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p-p 値で示される。

(注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
入力商用周期

T2: Due to Switching
スイッチング周期

Ripple [mVp-p]

T1

T2


Fig. Complex Ripple Wave Form

図 リップル波形詳細図

2.Values

Load Current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.0	10	10
1.0	30	30
2.0	30	30
3.0	35	35
4.0	35	35
5.0	35	35
6.7	40	40
7.4	45	45
—	—	—
—	—	—
—	—	—

COSEL

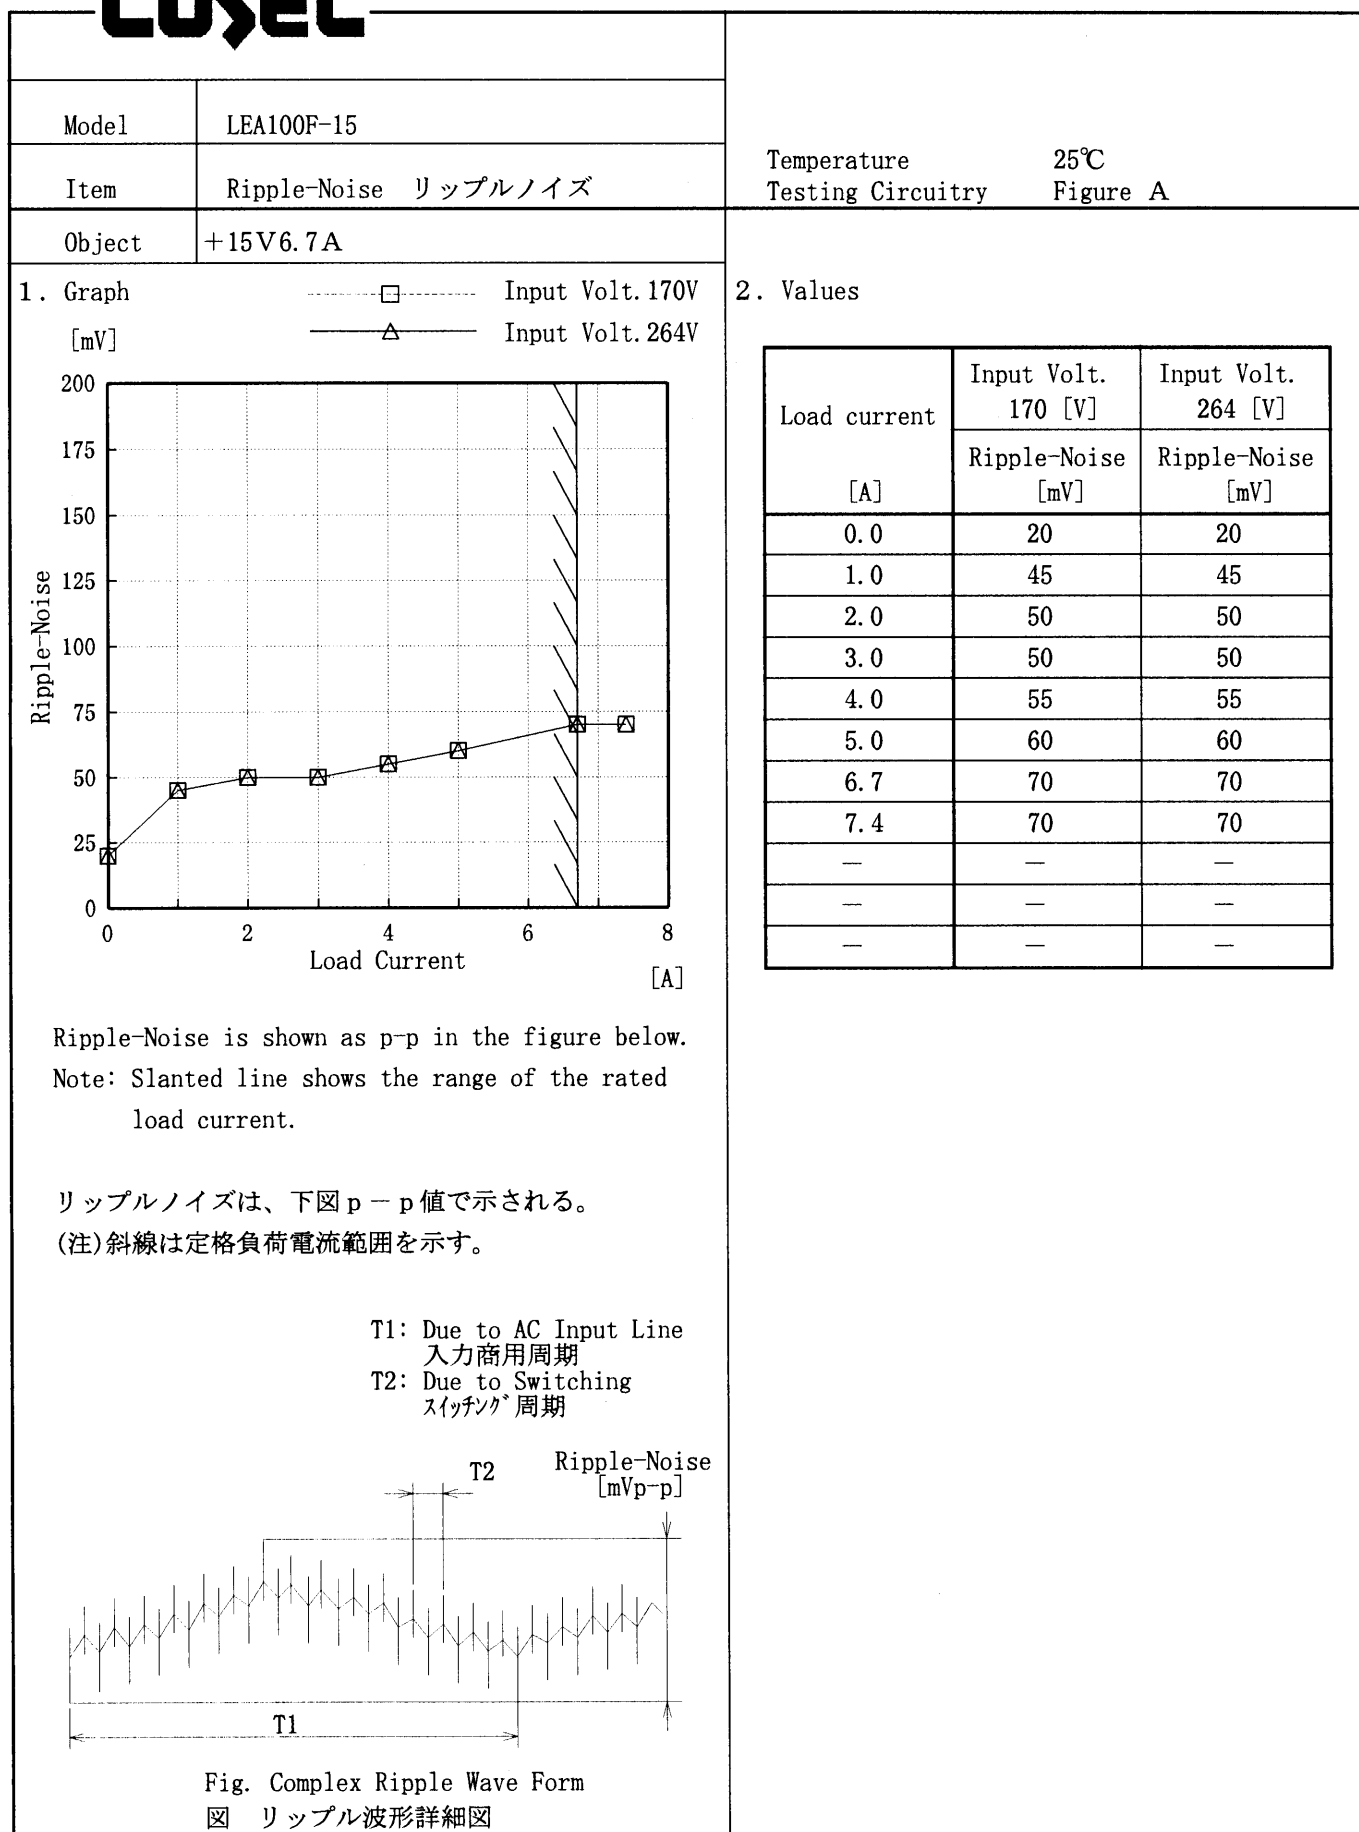

COSEL

Model		LEA100F-15	Temperature 25°C Testing Circuitry Figure A																																																											
Item		Overcurrent Protection 過電流保護																																																												
Object		+15V 6.7A																																																												
1. Graph		<div> <div>-----</div> Input Volt. 170 V <div>-----</div> Input Volt. 200 V <div>-----</div> Input Volt. 264 V </div> <p>Output Voltage [V]</p> <p>Load Current [A]</p>	2. Values																																																											
			<table> <tr> <th rowspan="2">Output Voltage [V]</th><th>Input Volt. 170[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 264[V]</th></tr> <tr> <th>Load Current [A]</th><th>Load Current [A]</th><th>Load Current [A]</th></tr> <tr><td>15.00</td><td>8.88</td><td>8.87</td><td>8.87</td></tr> <tr><td>14.25</td><td>8.87</td><td>8.86</td><td>8.86</td></tr> <tr><td>13.50</td><td>8.84</td><td>8.82</td><td>8.80</td></tr> <tr><td>12.00</td><td>8.73</td><td>8.71</td><td>8.71</td></tr> <tr><td>10.50</td><td>8.88</td><td>8.89</td><td>8.89</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </table>	Output Voltage [V]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	Load Current [A]	Load Current [A]	Load Current [A]	15.00	8.88	8.87	8.87	14.25	8.87	8.86	8.86	13.50	8.84	8.82	8.80	12.00	8.73	8.71	8.71	10.50	8.88	8.89	8.89	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Output Voltage [V]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																											
	Load Current [A]	Load Current [A]	Load Current [A]																																																											
15.00	8.88	8.87	8.87																																																											
14.25	8.87	8.86	8.86																																																											
13.50	8.84	8.82	8.80																																																											
12.00	8.73	8.71	8.71																																																											
10.50	8.88	8.89	8.89																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

10.5V以下は間欠状態。

COSEL

Model

LEA100F-15

Item

Overvoltage Protection
過電圧保護

Object

+15V6.7A

1. Graph

△

Input Volt. 170 V

□

Input Volt. 200 V

○

Input Volt. 264 V

[V]

Operating Point

Ambient Temperature [°C]

Load 0%

Note: Slanted line shows the range of the rated ambient temperature.


(注)斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp.	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
[°C]	Operating Point [V]		
-20	18.3	18.3	18.3
-10	18.4	18.4	18.4
0	18.5	18.5	18.5
10	18.7	18.7	18.7
20	18.8	18.8	18.8
25	18.9	18.9	18.9
30	19.0	19.0	19.0
40	19.1	19.1	19.1
50	19.2	19.2	19.2
60	19.4	19.4	19.4
—	—	—	—

COSEL

Model	LEA100F-15	Temperature 25°C Testing Circuitry Figure A
Item	Inrush Current 突入電流	
Object		

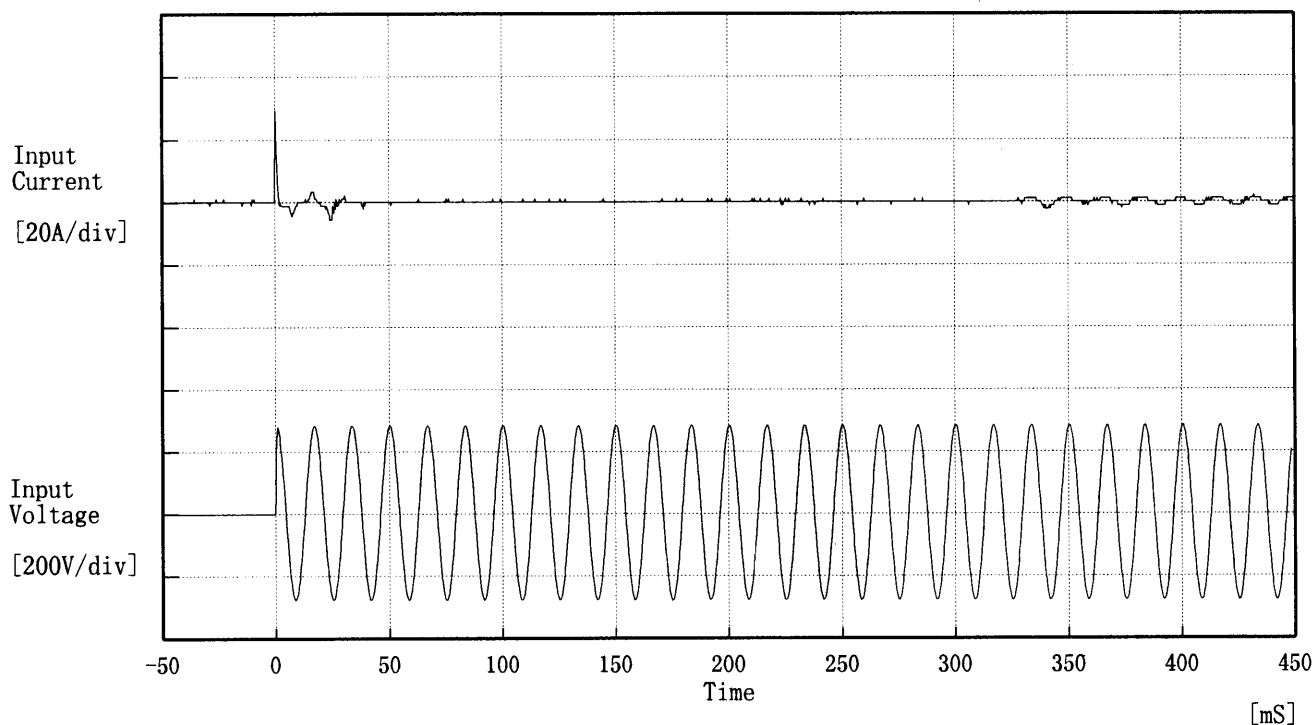

Input Voltage 200 V


Frequency 60 Hz

Load 100 %


Inrush Current


① 29.16 [A]

② 2.25 [A]

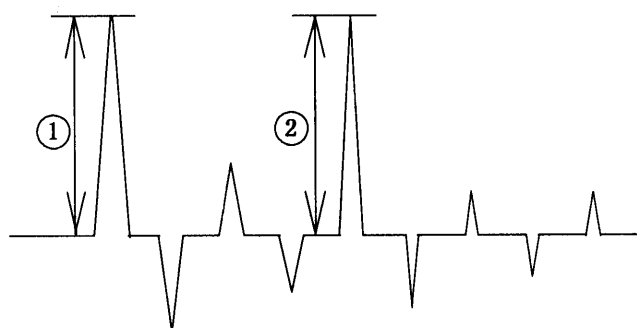

COSEL

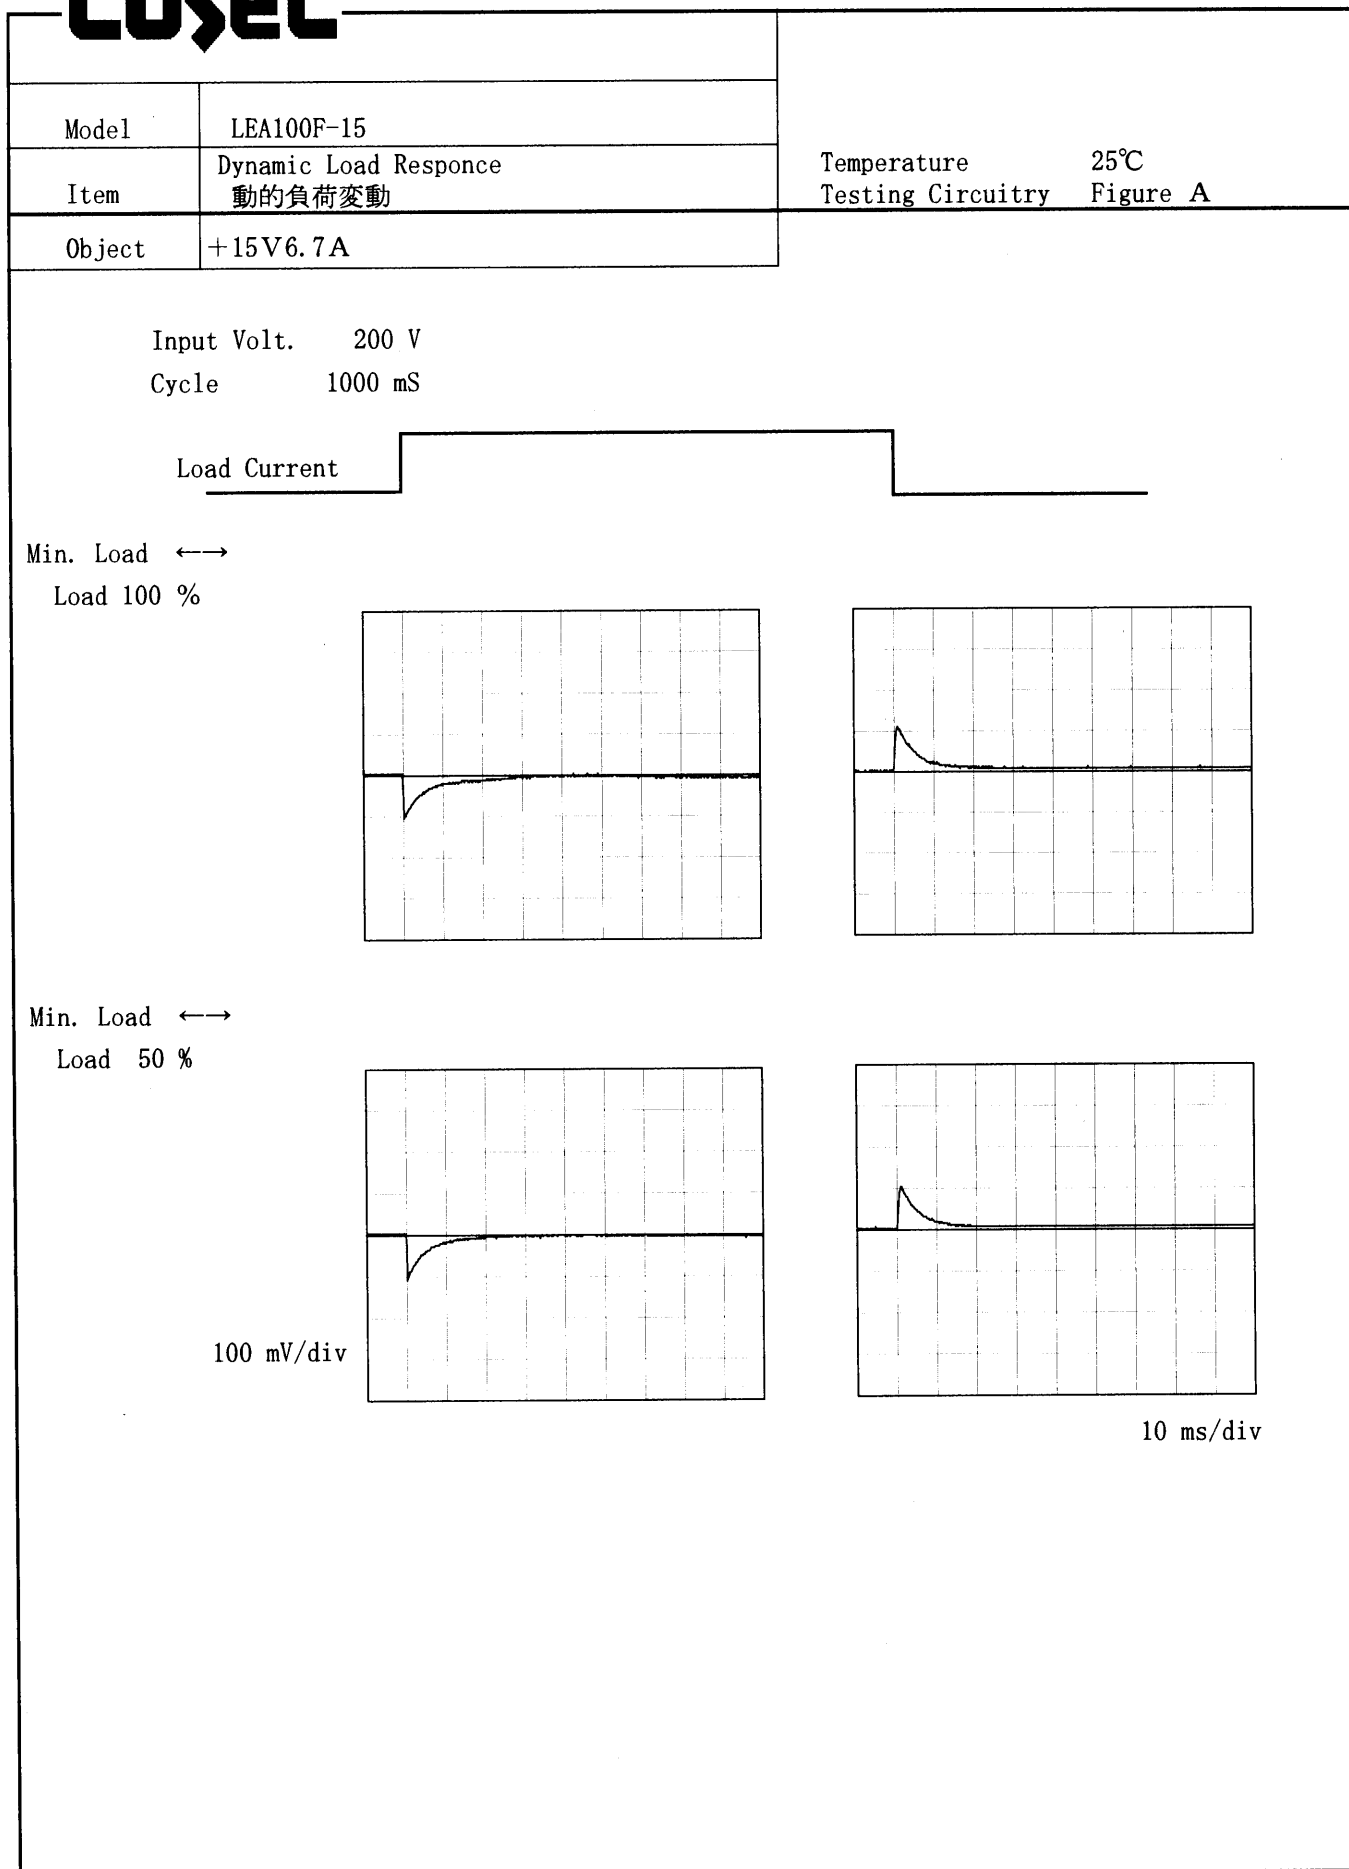

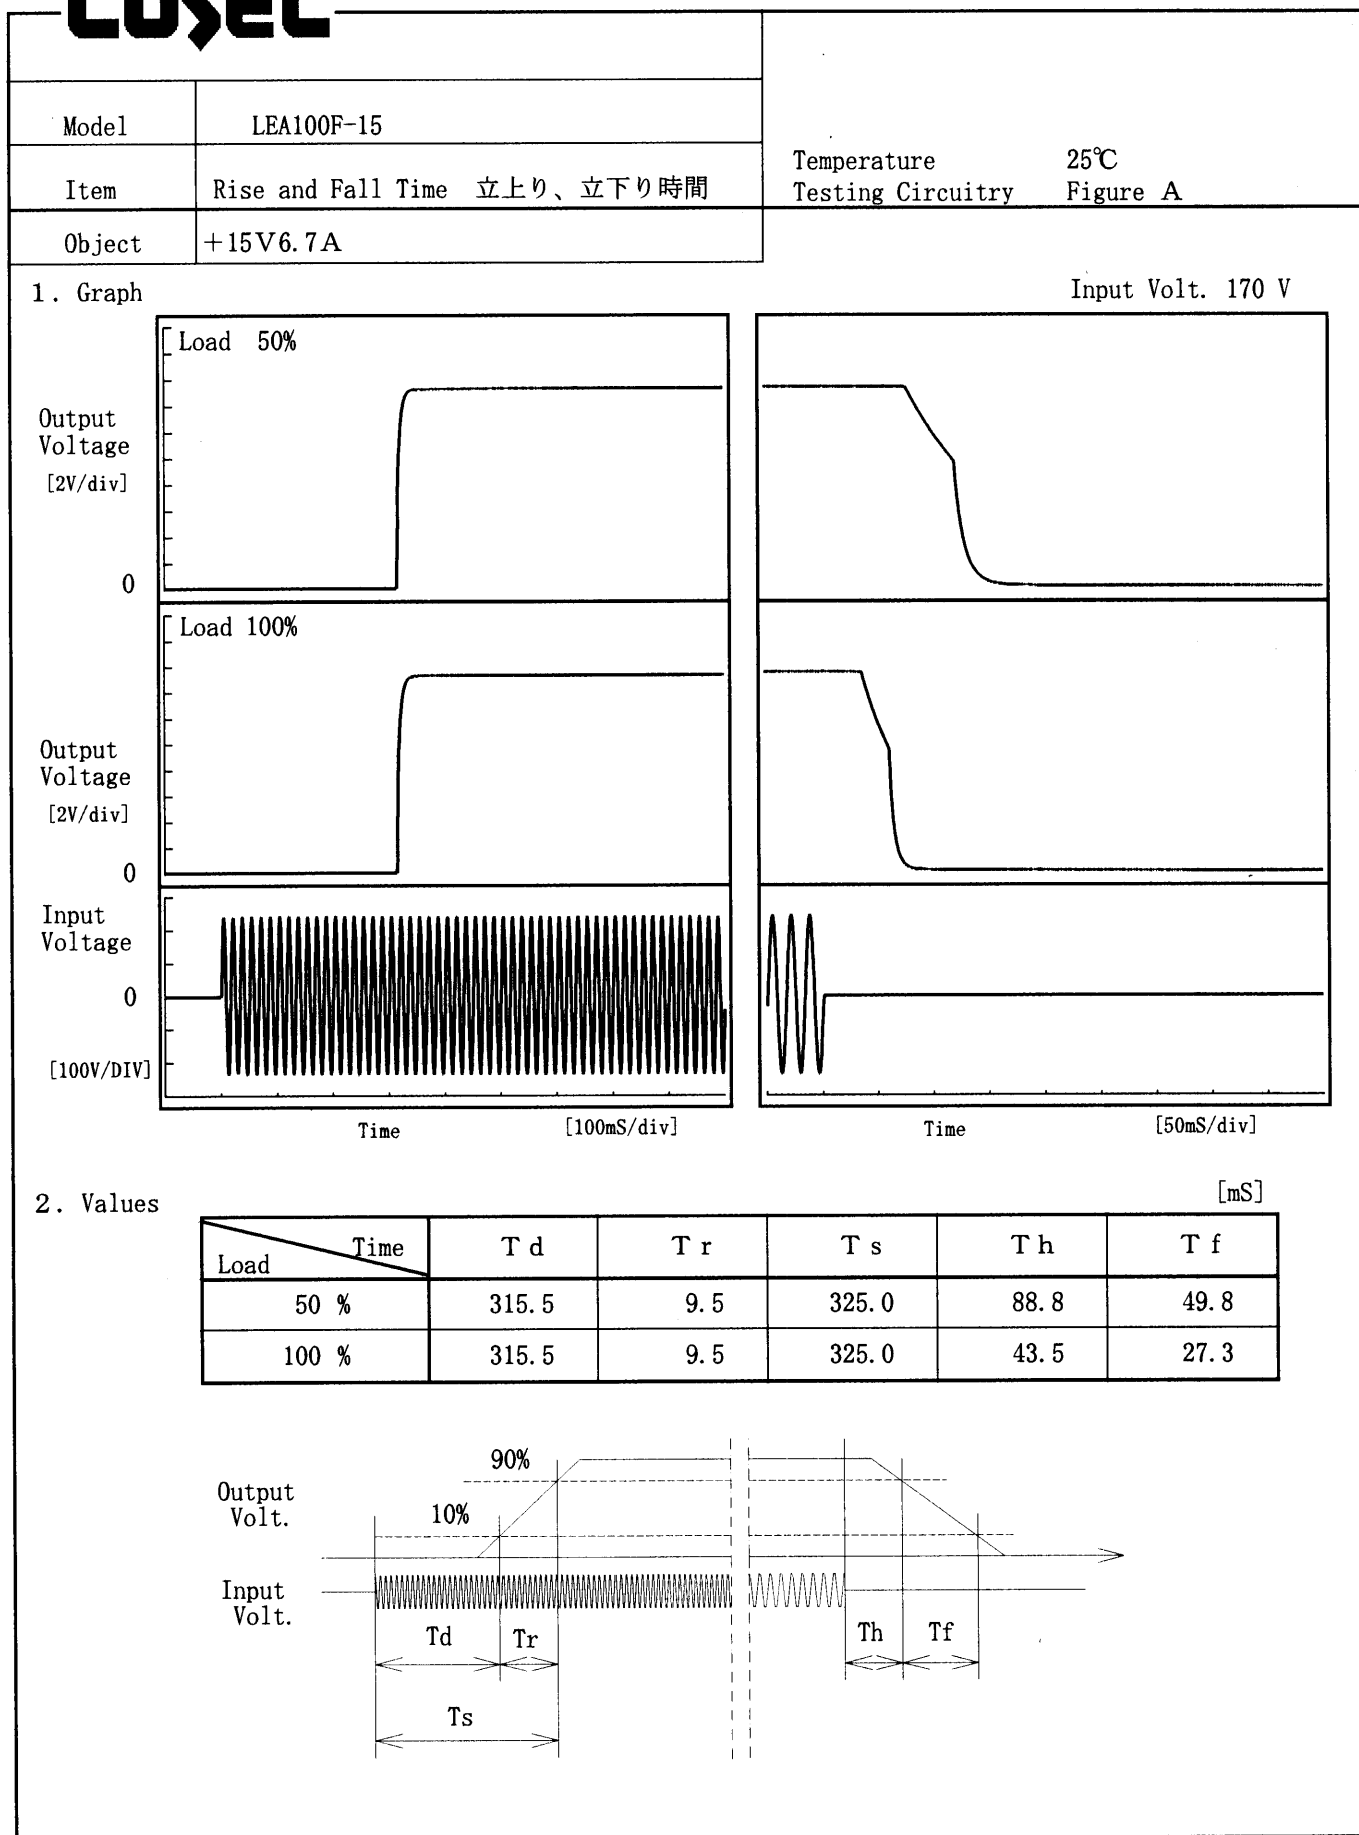COSEL

COSEL

Model	LEA100F-15																																																						
Item	Ambient Temperature Drift 周囲温度変動	Testing Circuitry Figure A																																																					
Object	+15V6.7A																																																						
1. Graph		2. Values																																																					
<div> <div> <div>—△—</div> <div>—□—</div> <div>—○—</div> </div> <div> <div>Input Volt. 170V</div> <div>Input Volt. 200V</div> <div>Input Volt. 264V</div> </div> </div> <div> <div>Output Voltage [V]</div> <div> <div>15.26</div> <div>15.22</div> <div>15.18</div> <div>15.14</div> <div>15.10</div> <div>15.06</div> <div>15.02</div> <div>0</div> </div> <div> <div>Ambient Temperature [°C]</div> <div> <div>-30</div> <div>-10</div> <div>10</div> <div>30</div> <div>50</div> <div>70</div> </div> </div> </div> <div> <div>Load 100%</div> <div>Note: Slanted line shows the range of the rated ambient temperature.</div> <div>(注)斜線は定格周囲温度範囲を示す。</div> </div>		<table> <tr> <th>Temperature</th><th>Input Volt. 170[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 264[V]</th></tr> <tr> <th>[°C]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr> <tr><td>-20</td><td>15.123</td><td>15.123</td><td>15.123</td></tr> <tr><td>-10</td><td>15.125</td><td>15.125</td><td>15.125</td></tr> <tr><td>0</td><td>15.126</td><td>15.126</td><td>15.126</td></tr> <tr><td>10</td><td>15.126</td><td>15.126</td><td>15.126</td></tr> <tr><td>20</td><td>15.126</td><td>15.126</td><td>15.126</td></tr> <tr><td>25</td><td>15.127</td><td>15.127</td><td>15.127</td></tr> <tr><td>30</td><td>15.129</td><td>15.129</td><td>15.129</td></tr> <tr><td>40</td><td>15.125</td><td>15.125</td><td>15.125</td></tr> <tr><td>50</td><td>15.121</td><td>15.121</td><td>15.121</td></tr> <tr><td>60</td><td>15.114</td><td>15.114</td><td>15.114</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </table>		Temperature	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	-20	15.123	15.123	15.123	-10	15.125	15.125	15.125	0	15.126	15.126	15.126	10	15.126	15.126	15.126	20	15.126	15.126	15.126	25	15.127	15.127	15.127	30	15.129	15.129	15.129	40	15.125	15.125	15.125	50	15.121	15.121	15.121	60	15.114	15.114	15.114	—	—	—	—
Temperature	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																				
[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																				
-20	15.123	15.123	15.123																																																				
-10	15.125	15.125	15.125																																																				
0	15.126	15.126	15.126																																																				
10	15.126	15.126	15.126																																																				
20	15.126	15.126	15.126																																																				
25	15.127	15.127	15.127																																																				
30	15.129	15.129	15.129																																																				
40	15.125	15.125	15.125																																																				
50	15.121	15.121	15.121																																																				
60	15.114	15.114	15.114																																																				
—	—	—	—																																																				

COSEL

Model		LEA100F-15																																										
Item		Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧																																										
Object		+15V6.7A																																										
1. Graph		<div> <div> <div>□</div> <div>Load 50%</div> </div> <div> <div>△</div> <div>Load 100%</div> </div> </div> <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注)斜線は定格周囲温度範囲を示す。</p>																																										
2. Values		<table> <tr> <th>Ambient Temp.</th><th>Load 50%</th><th>Load 100%</th></tr> <tr> <th>Input Volt.</th><th>Input Volt.</th><th>Input Volt.</th></tr> <tr> <th>[°C]</th><th>[V]</th><th>[V]</th></tr> <tr><td>-20</td><td>72</td><td>73</td></tr> <tr><td>-10</td><td>72</td><td>73</td></tr> <tr><td>0</td><td>72</td><td>73</td></tr> <tr><td>10</td><td>72</td><td>73</td></tr> <tr><td>20</td><td>72</td><td>73</td></tr> <tr><td>25</td><td>72</td><td>73</td></tr> <tr><td>30</td><td>72</td><td>73</td></tr> <tr><td>40</td><td>72</td><td>73</td></tr> <tr><td>50</td><td>72</td><td>73</td></tr> <tr><td>60</td><td>72</td><td>73</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </table>	Ambient Temp.	Load 50%	Load 100%	Input Volt.	Input Volt.	Input Volt.	[°C]	[V]	[V]	-20	72	73	-10	72	73	0	72	73	10	72	73	20	72	73	25	72	73	30	72	73	40	72	73	50	72	73	60	72	73	—	—	—
Ambient Temp.	Load 50%	Load 100%																																										
Input Volt.	Input Volt.	Input Volt.																																										
[°C]	[V]	[V]																																										
-20	72	73																																										
-10	72	73																																										
0	72	73																																										
10	72	73																																										
20	72	73																																										
25	72	73																																										
30	72	73																																										
40	72	73																																										
50	72	73																																										
60	72	73																																										
—	—	—																																										

COSEL

Model		LEA100F-15																																						
Item		Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)																																						
Object		+15V6.7A																																						
1. Graph		<div> <div> <div>□</div> <div>Load 50%</div> </div> <div> <div>△</div> <div>Load 100%</div> </div> </div> <div> <div> <div>[mV]</div> <div>150</div> <div>125</div> <div>100</div> <div>75</div> <div>50</div> <div>25</div> <div>0</div> </div> <div> <div>Ripple Voltage</div> </div> <div> <div>-30</div> <div>-10</div> <div>10</div> <div>30</div> <div>50</div> <div>70</div> </div> <div> <div>Ambient Temperature</div> <div>[°C]</div> </div> </div> <div> <div>Input Volt. 200 V</div> </div> <div> <div>Note: Slanted line shows the range of the rated ambient temperature.</div> </div> <div> <div>(注)斜線は定格周囲温度範囲を示す。</div> </div>																																						
2. Values		<table> <tr> <th rowspan="2">Ambient Temp. [°C]</th><th>Load 50%</th><th>Load 100%</th></tr> <tr> <th>Ripple Output Volt. [mV]</th><th>Ripple Output Volt. [mV]</th></tr> <tr><td>-20</td><td>70</td><td>80</td></tr> <tr><td>-10</td><td>55</td><td>65</td></tr> <tr><td>0</td><td>45</td><td>55</td></tr> <tr><td>10</td><td>45</td><td>50</td></tr> <tr><td>20</td><td>40</td><td>45</td></tr> <tr><td>25</td><td>35</td><td>40</td></tr> <tr><td>30</td><td>30</td><td>35</td></tr> <tr><td>40</td><td>25</td><td>30</td></tr> <tr><td>50</td><td>25</td><td>30</td></tr> <tr><td>60</td><td>25</td><td>30</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </table>	Ambient Temp. [°C]	Load 50%	Load 100%	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	-20	70	80	-10	55	65	0	45	55	10	45	50	20	40	45	25	35	40	30	30	35	40	25	30	50	25	30	60	25	30	—	—	—
Ambient Temp. [°C]	Load 50%	Load 100%																																						
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																						
-20	70	80																																						
-10	55	65																																						
0	45	55																																						
10	45	50																																						
20	40	45																																						
25	35	40																																						
30	30	35																																						
40	25	30																																						
50	25	30																																						
60	25	30																																						
—	—	—																																						

COSEL


Model LEA100F-15

Item Time Lapse Drift 経時ドリフト

Object +15V6.7A

Temperature 25 °C
Testing Circuitry Figure A

1. Graph

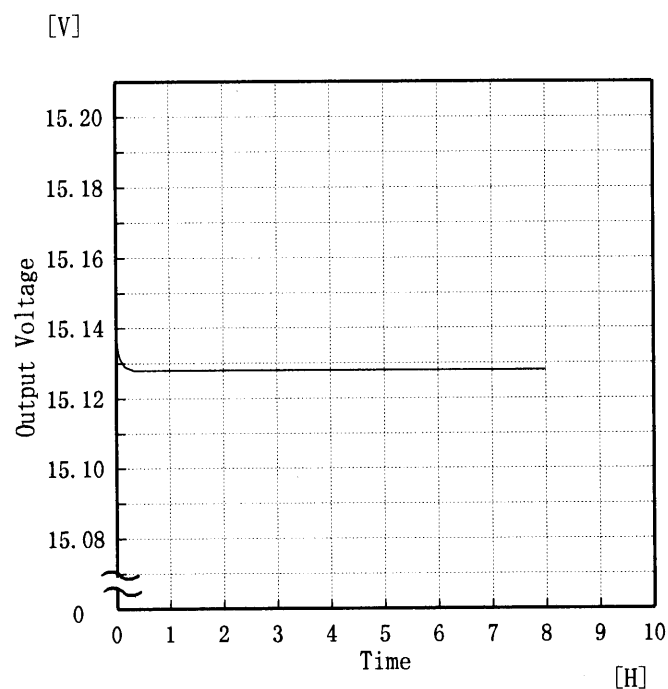

2. Values

Time since start [H]	Output Voltage [V]
0.0	15.140
0.5	15.128
1.0	15.128
2.0	15.128
3.0	15.128
4.0	15.128
5.0	15.128
6.0	15.128
7.0	15.128
8.0	15.128

COSEL

Model	LEA100F-15	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+15V6.7A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 170~264 V

Load Current : 0.00~6.70 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -10~50 °C

入力電圧 : 170~264 V

負荷電流 : 0.00~6.70 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ration) [%]
Maximum Voltage	25	264	0.00	15.137	±9	±0.1
Minimum Voltage	50	264	6.70	15.121		


COSEL

Model	LEA100F-15	Temperature	25°C
Item	Harmonic Current 高調波電流	Testing Circuitry	Figure E
Object			


1. Input Current Waveform

— Input Current
— Envelope of the input current to classify equipment as Class D
クラスDの機器を決定するための入力電流包絡線

1 A/div

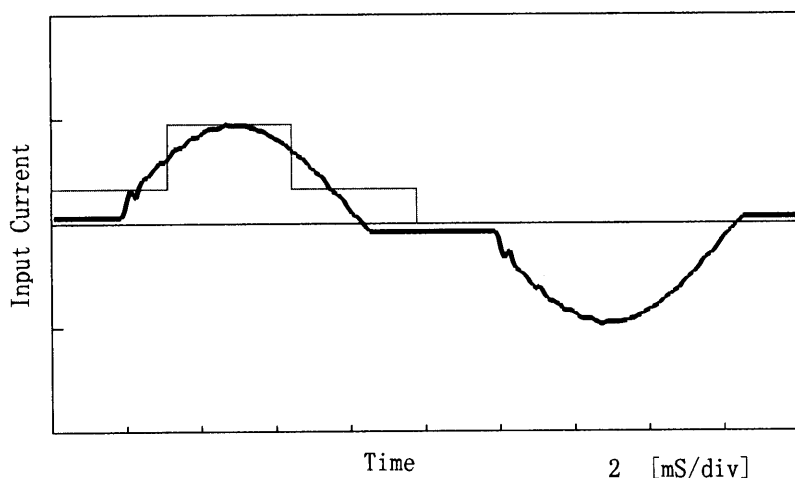

2. Harmonic Current

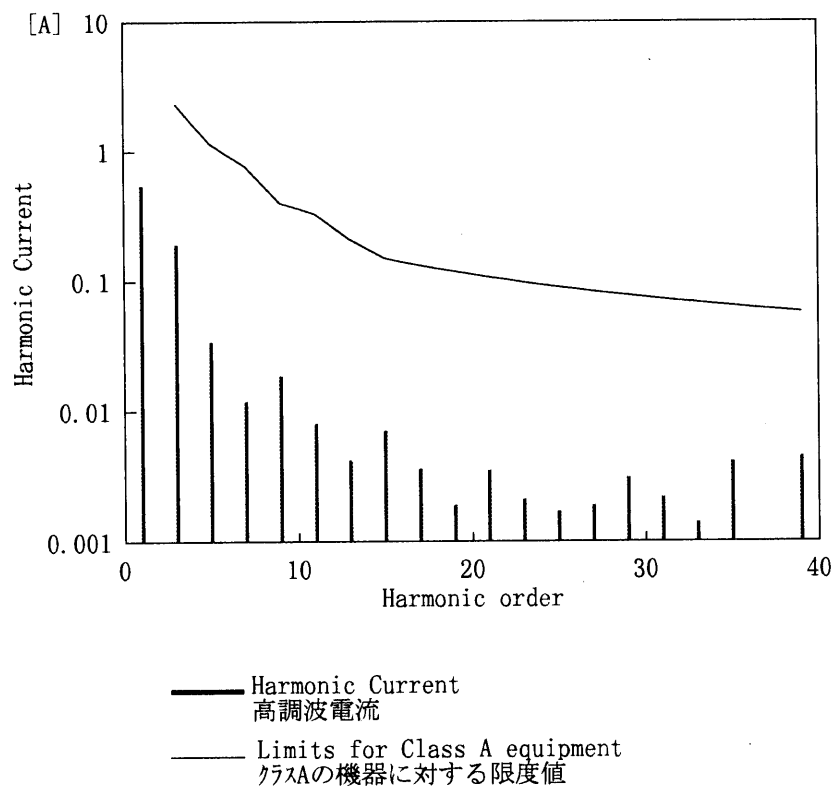

Conditions	Values
Input Voltage [V]	230.6
Input Current [A]	0.584
Active Power [W]	124.4
Apparent Power [VA]	134.7
Frequency [Hz]	50
Power Factor	0.924
Output Power [W]	100.5

Harmonics order 高調波次数	Limits 限度値 [A]	Values 測定値 [A]
1	—	0.54880
2	—	0.00090
3	2.29402	0.19350
4	—	0.00010
5	1.13703	0.03430
6	—	0.00000
7	0.76800	0.01190
8	—	0.00000
9	0.39896	0.01860
10	—	0.00010
11	0.32914	0.00800
12	—	0.00030
13	0.20945	0.00420
14	—	0.00010
15	0.14961	0.00710
16	—	0.00000
17	0.13201	0.00360
18	—	0.00000
19	0.11811	0.00190
20	—	0.00000
21	0.10686	0.00350
22	—	0.00030
23	0.09757	0.00210
24	—	0.00010
25	0.08977	0.00170
26	—	0.00000
27	0.08312	0.00190
28	—	0.00000
29	0.07738	0.00310
30	—	0.00000
31	0.07239	0.00220
32	—	0.00010
33	0.06800	0.00140
34	—	0.00000
35	0.06412	0.00410
36	—	0.00000
37	0.06065	0.00060
38	—	0.00010
39	0.05754	0.00450
40	—	0.00010


COSEL

Model	LEA100F-15	Temperature	25°C
Item	Harmonic Current 高調波電流	Testing Circuitry	Figure E
Object			


1. Input Current Waveform

— Input Current
 — Envelope of the input current to classify equipment as Class D
 クラスDの機器を決定するための入力電流包絡線

0.5 A/div

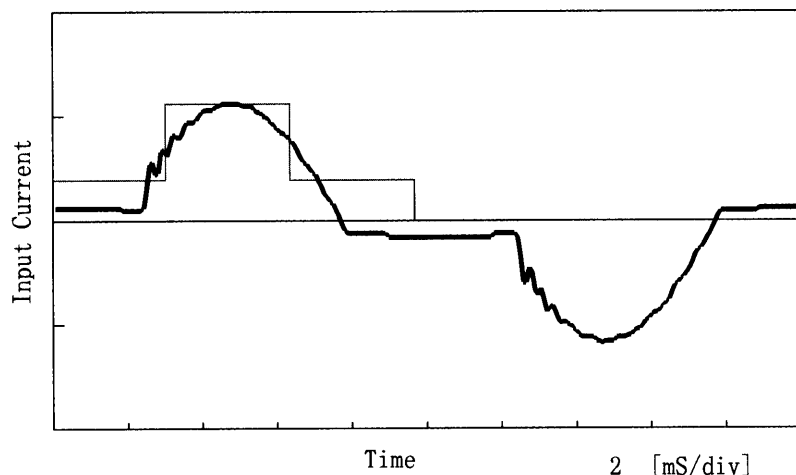

2. Harmonic Current

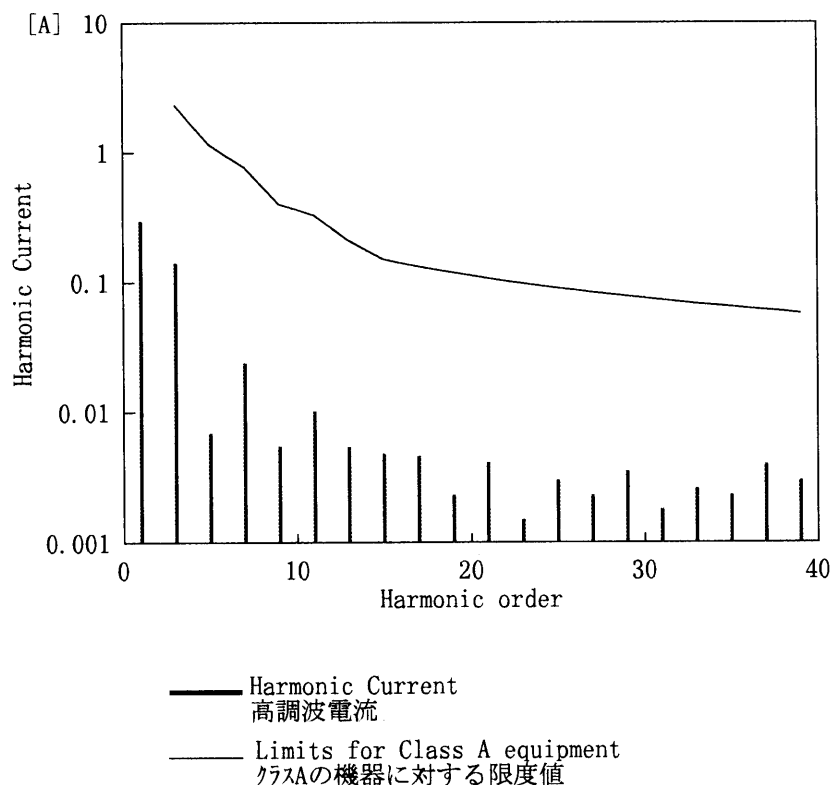

Conditions	Values
Input Voltage [V]	230.7
Input Current [A]	0.329
Active Power [W]	65.6
Apparent Power [VA]	76
Frequency [Hz]	50
Power Factor	0.863
Output Power [W]	50.25

Harmonics order 高調波次数	Limits 限度値 [A]	Values 測定値 [A]
1	—	0.29590
2	—	0.00090
3	2.29302	0.14080
4	—	0.00010
5	1.13654	0.00690
6	—	0.00000
7	0.76766	0.02400
8	—	0.00010
9	0.39879	0.00550
10	—	0.00030
11	0.32900	0.01020
12	—	0.00010
13	0.20936	0.00540
14	—	0.00010
15	0.14954	0.00480
16	—	0.00000
17	0.13195	0.00460
18	—	0.00030
19	0.11806	0.00230
20	—	0.00010
21	0.10682	0.00410
22	—	0.00010
23	0.09753	0.00150
24	—	0.00000
25	0.08973	0.00300
26	—	0.00030
27	0.08308	0.00230
28	—	0.00010
29	0.07735	0.00350
30	—	0.00000
31	0.07236	0.00180
32	—	0.00000
33	0.06797	0.00260
34	—	0.00010
35	0.06409	0.00230
36	—	0.00010
37	0.06063	0.00400
38	—	0.00010
39	0.05752	0.00300
40	—	0.00000

COSEL

COSEL

		Testing Circuitry Figure A
Model	LEA100F-15	
Item	Condensation 結露特性	
Object	+15V6.7A	

1. Condensation test

Testing procedure is as follows.

① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.

② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.

③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で－10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values												
<table><tr><th>Item</th><th>Data</th><th>Testing Conditions</th></tr><tr><td>Output Voltage [V]</td><td>15.132</td><td>Input Volt.：200V, Load Current:6.7A</td></tr><tr><td>Line Regulation [mV]</td><td>1</td><td>Input Volt.：170～264V, Load Current:6.7A</td></tr><tr><td>Load Regulation [mV]</td><td>8</td><td>Input Volt.：200V, Load Current:0.0～6.7A</td></tr></table>	Item	Data	Testing Conditions	Output Voltage [V]	15.132	Input Volt.：200V, Load Current:6.7A	Line Regulation [mV]	1	Input Volt.：170～264V, Load Current:6.7A	Load Regulation [mV]	8	Input Volt.：200V, Load Current:0.0～6.7A
Item	Data	Testing Conditions										
Output Voltage [V]	15.132	Input Volt.：200V, Load Current:6.7A										
Line Regulation [mV]	1	Input Volt.：170～264V, Load Current:6.7A										
Load Regulation [mV]	8	Input Volt.：200V, Load Current:0.0～6.7A										

COSEL

Model		LEA100F-15		Temperature 25℃ Testing Circuitry Figure B
Item		Leakage Current 漏洩電流		
Object				

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	—	—	—
(B) IEC60950	—	—	—

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	0.31	0.43	0.49

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力の高相について測定し、その大きい方を漏洩電流測定値とする。

COSEL

Model		LEA100F-15		Temperature Testing Circuitry	25℃ Figure C
Item		Line Noise Tolerance 入力雑音耐量			
Object		+15V6.7A			

1. Results

Pulse Width [n S]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

Conditions
Input Voltage :200 V
Pulse Voltage :2000 V
Pulse Cycle :10 mS
Pulse Input Duration:1 min. or more
Load :100 %

COSEL

Model	LEA100F-15	Temperature	25°C
Item	Conducted Emission 雑音端子電圧	Testing Circuitry	Figure D
Object			

1. Graph


Remarks

Input Volt. 230V (CISPR Pub22 Class B)

Load 100 %

Limit1: [CISPR Pub22] Class B(QP)

Limit2: [CISPR Pub22] Class B(Ave.)

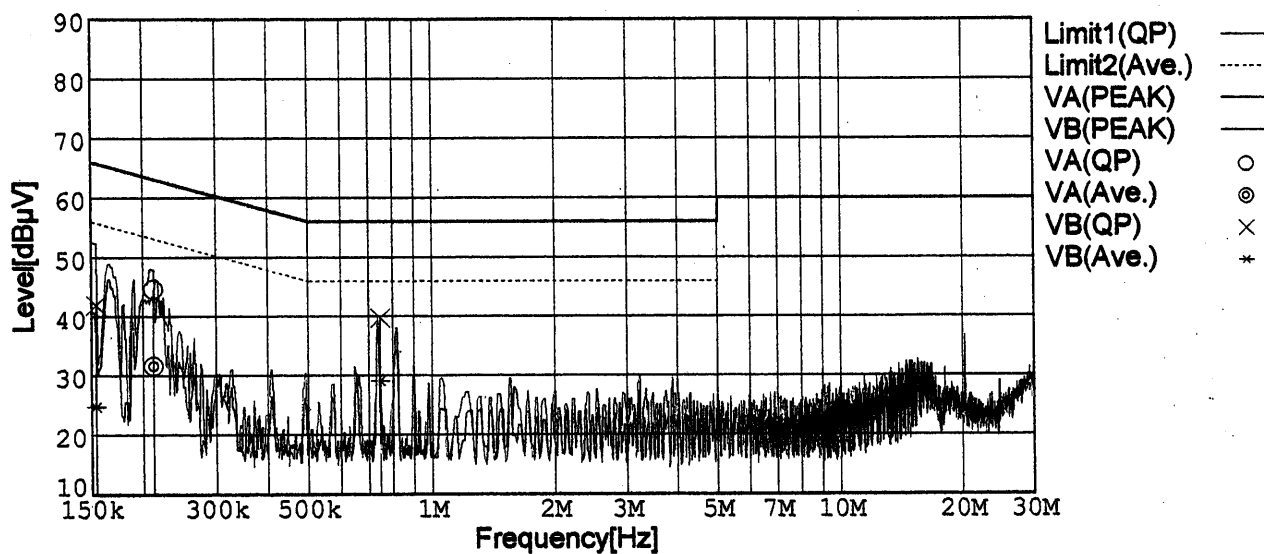

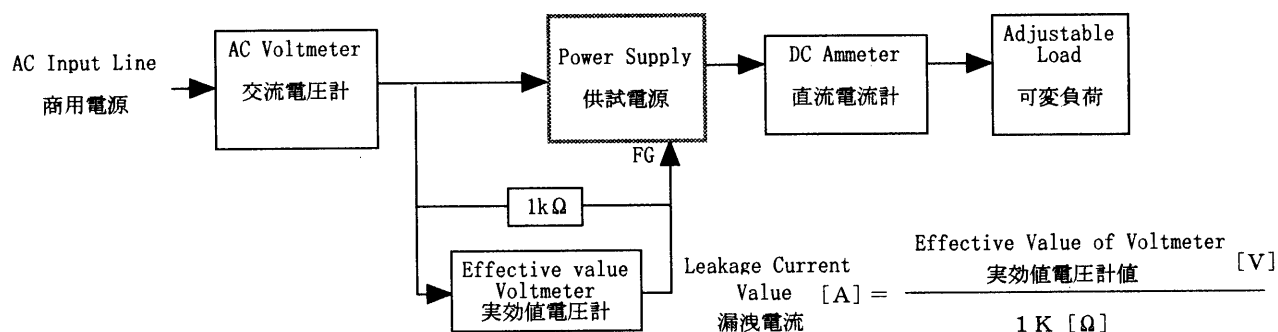
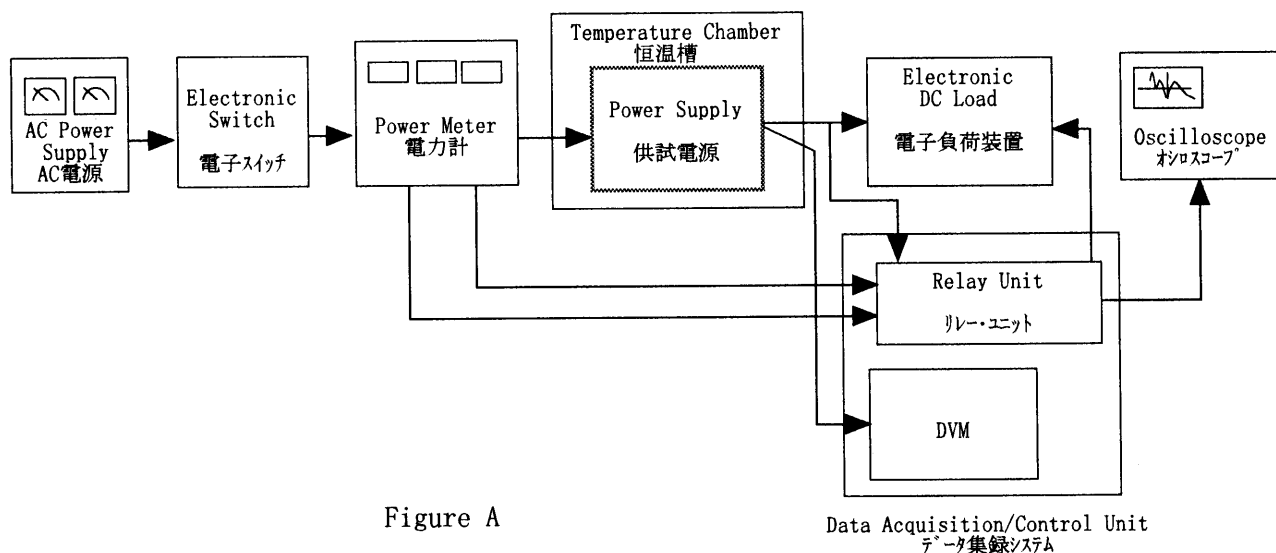


Figure B (DENTORI)

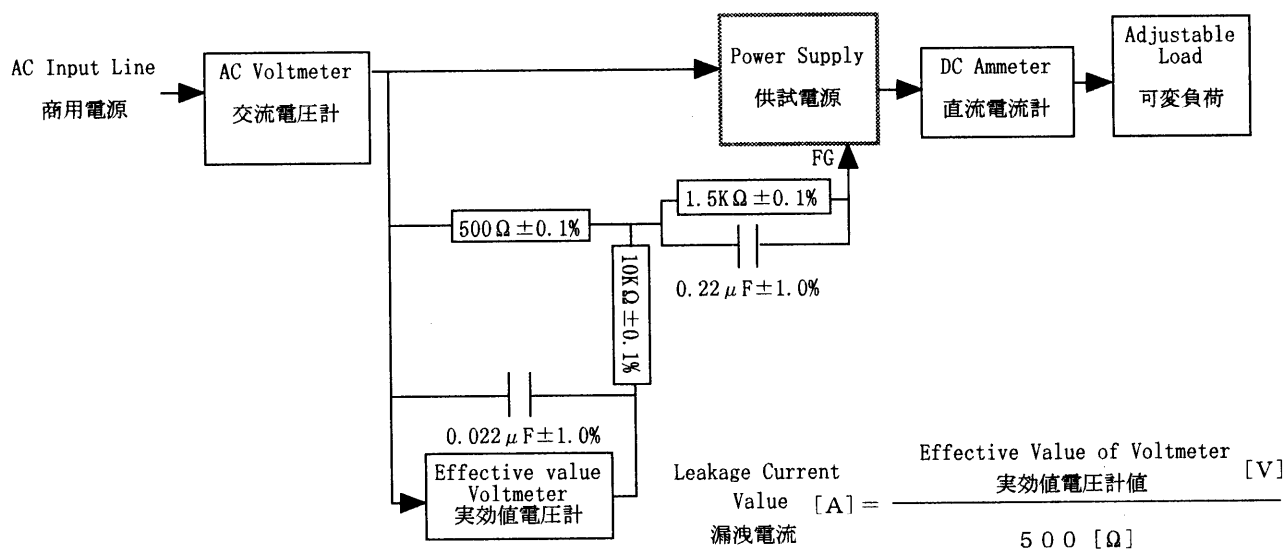


Figure B (IEC60950)

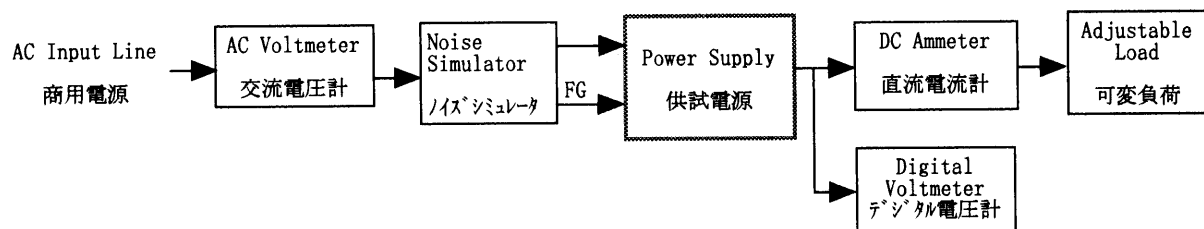


Figure C

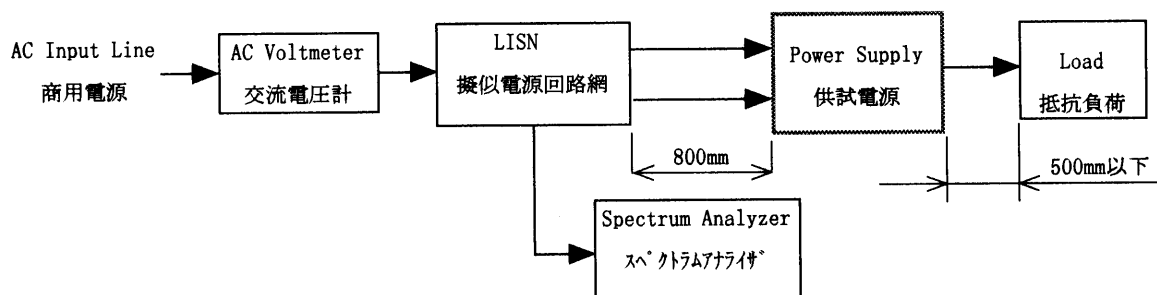


Figure D

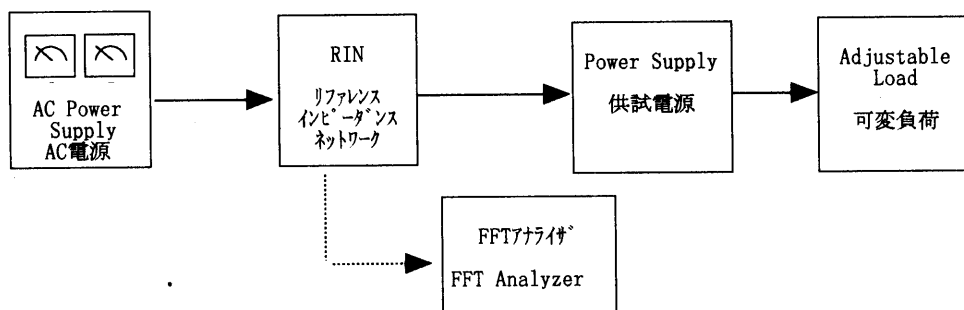


Figure E