


COSEL

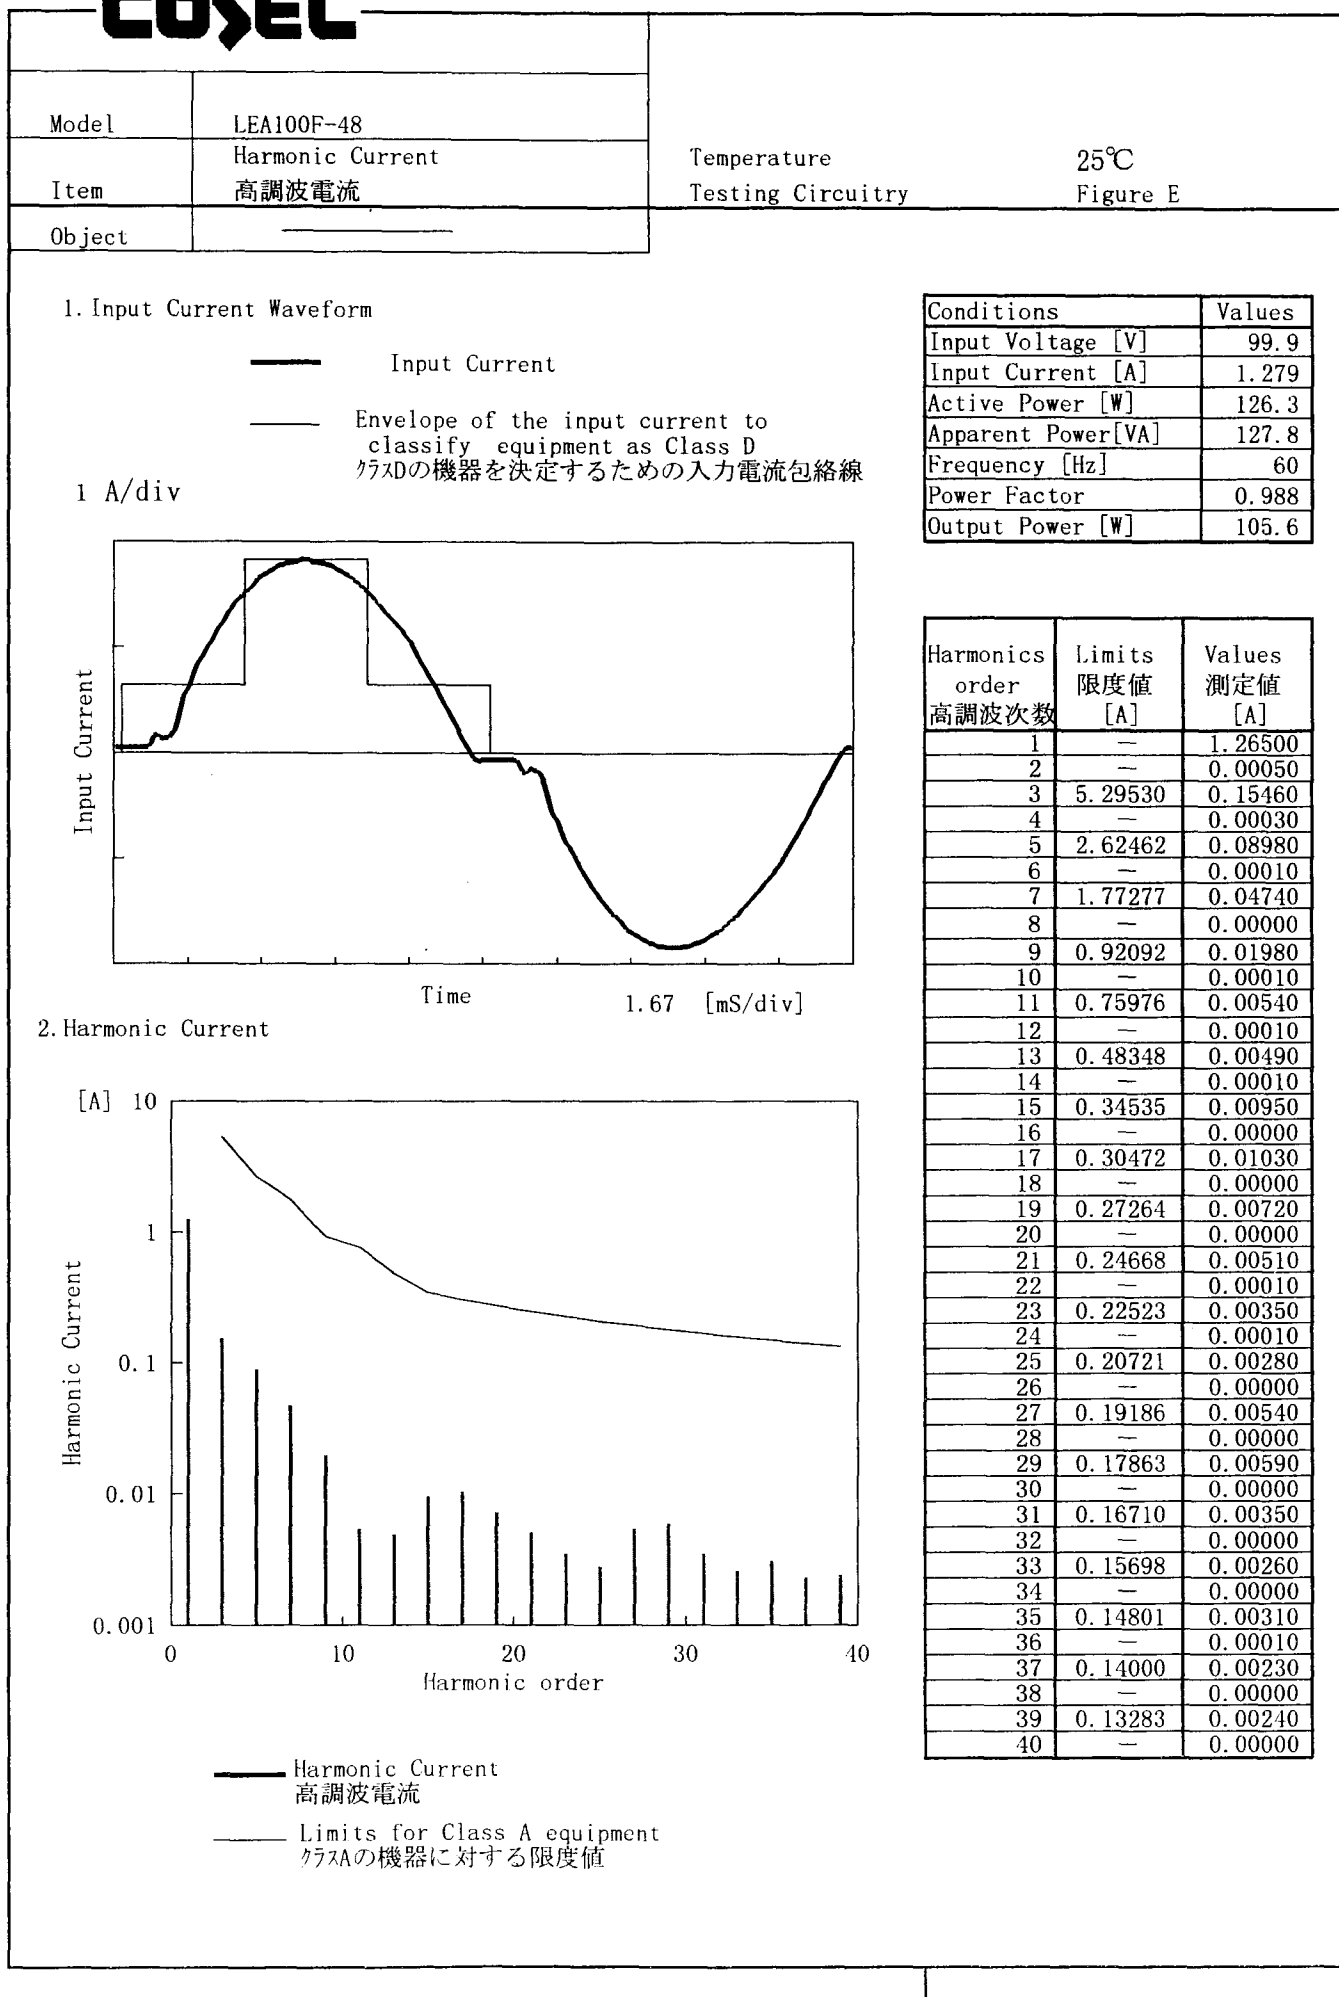


COSEL

Model	LEA100F-48	Temperature	25°C
Item	Harmonic Current 高調波電流	Testing Circuitry	Figure E
Object	_____		


1. Input Current Waveform

— Input Current
 — Envelope of the input current to classify equipment as Class D
 クラスDの機器を決定するための入力電流包絡線

1 A/div

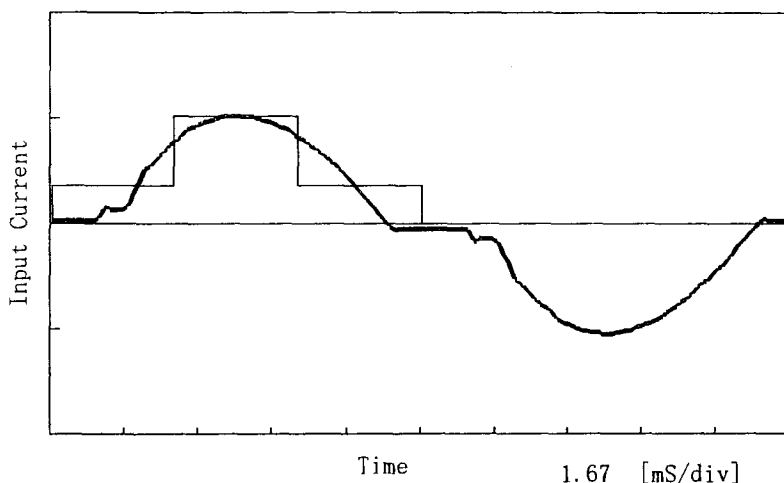


2. Harmonic Current

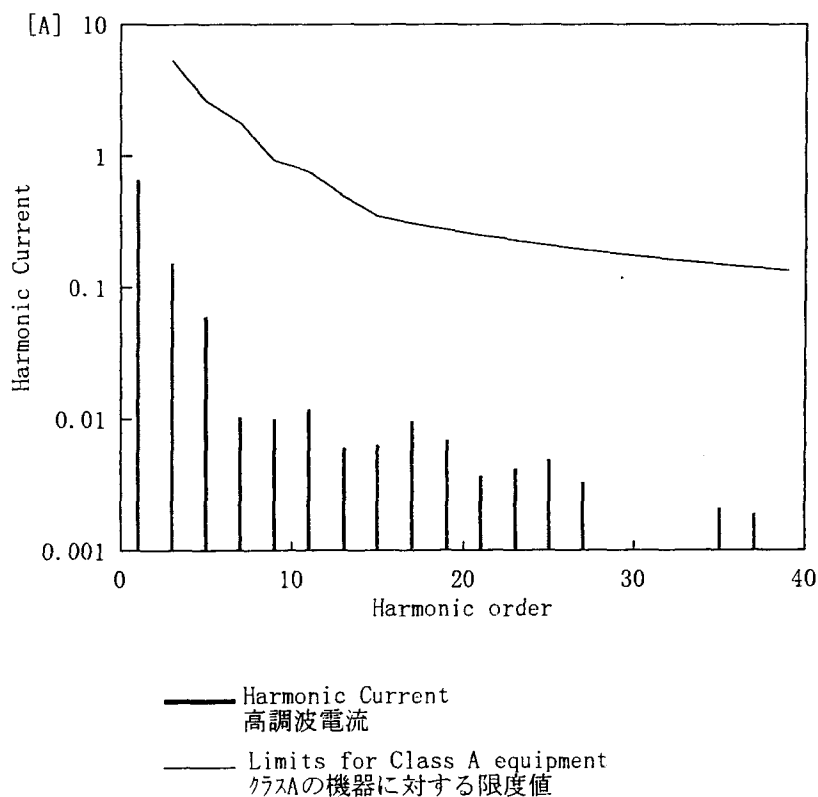

Conditions	Values
Input Voltage [V]	100.1
Input Current [A]	0.681
Active Power [W]	66
Apparent Power[VA]	68.2
Frequency [Hz]	60
Power Factor	0.968
Output Power [W]	52.8

Harmonics order 高調波次数	Limits 限度値 [A]	Values 測定値 [A]
1	—	0.66030
2	—	0.00050
3	5.28472	0.15270
4	—	0.00010
5	2.61938	0.06000
6	—	0.00010
7	1.76923	0.01030
8	—	0.00010
9	0.91908	0.01000
10	—	0.00010
11	0.75824	0.01190
12	—	0.00000
13	0.48252	0.00600
14	—	0.00000
15	0.34466	0.00640
16	—	0.00000
17	0.30411	0.00960
18	—	0.00010
19	0.27210	0.00690
20	—	0.00010
21	0.24618	0.00370
22	—	0.00000
23	0.22478	0.00420
24	—	0.00000
25	0.20679	0.00490
26	—	0.00000
27	0.19148	0.00330
28	—	0.00010
29	0.17827	0.00090
30	—	0.00010
31	0.16677	0.00060
32	—	0.00000
33	0.15666	0.00080
34	—	0.00000
35	0.14771	0.00210
36	—	0.00000
37	0.13973	0.00190
38	—	0.00010
39	0.13256	0.00090
40	—	0.00010

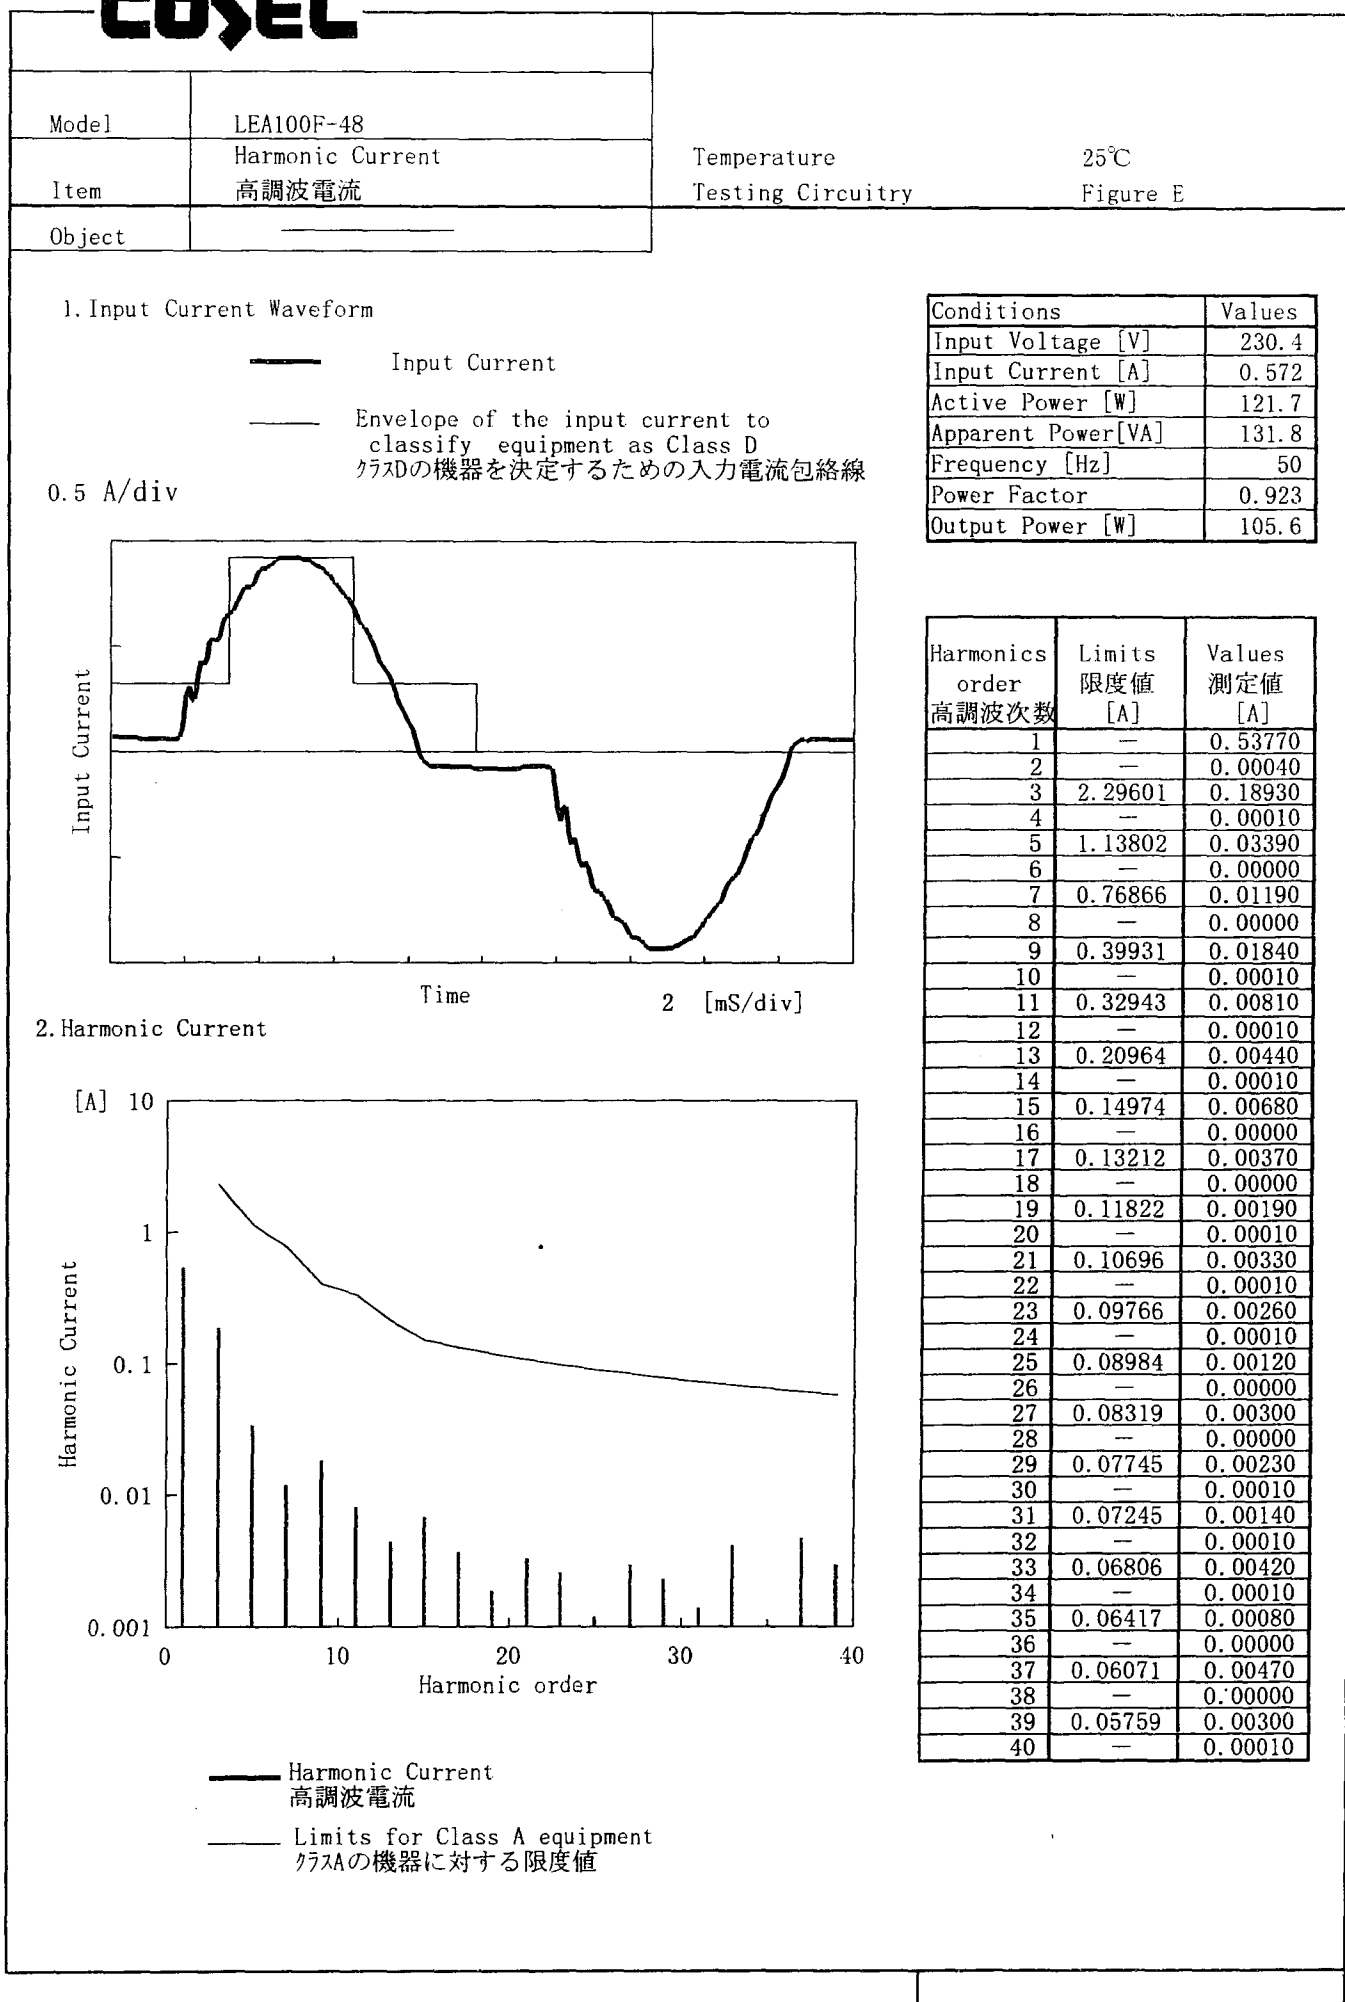COSEL


COSEL

Model	LEA100F-48	Temperature	25°C
Item	Harmonic Current 高調波電流	Testing Circuitry	Figure E
Object			


1. Input Current Waveform

— Input Current
 — Envelope of the input current to classify equipment as Class D
 クラスDの機器を決定するための入力電流包絡線

0.5 A/div

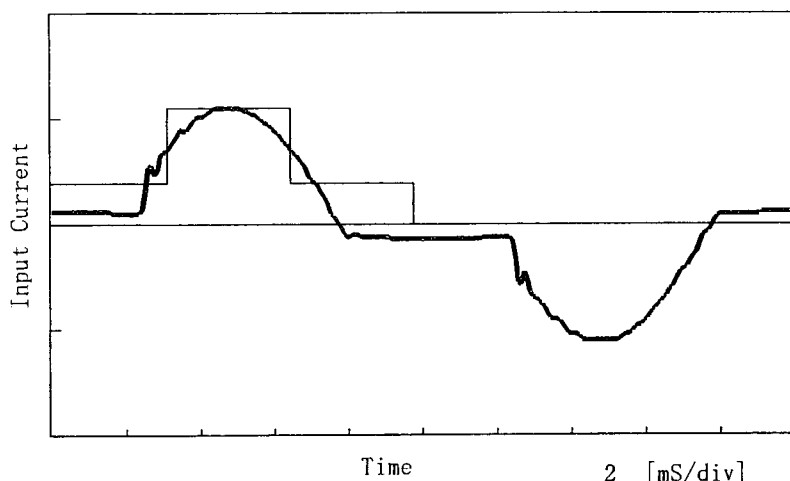

2. Harmonic Current

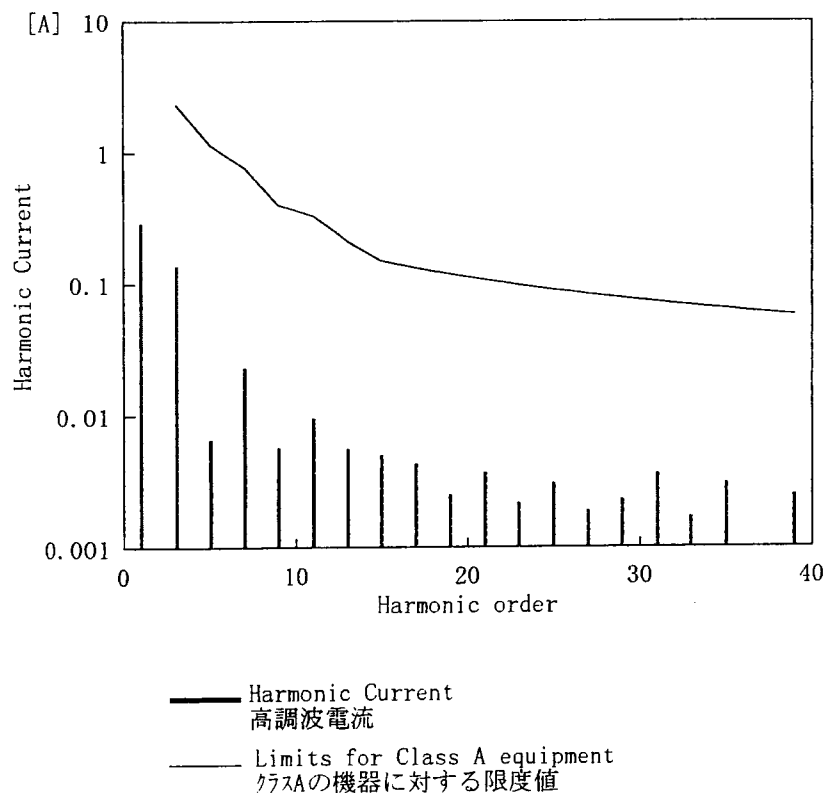


Conditions	Values
Input Voltage [V]	230.6
Input Current [A]	0.322
Active Power [W]	64.3
Apparent Power [VA]	74.4
Frequency [Hz]	50
Power Factor	0.864
Output Power [W]	52.8

Harmonics order 高調波次数	Limits 限度値 [A]	Values 測定値 [A]
1	—	0.29020
2	—	0.00050
3	2.29402	0.13740
4	—	0.00010
5	1.13703	0.00660
6	—	0.00000
7	0.76800	0.02350
8	—	0.00010
9	0.39896	0.00570
10	—	0.00010
11	0.32914	0.00960
12	—	0.00000
13	0.20945	0.00560
14	—	0.00000
15	0.14961	0.00500
16	—	0.00000
17	0.13201	0.00430
18	—	0.00010
19	0.11811	0.00250
20	—	0.00010
21	0.10686	0.00370
22	—	0.00000
23	0.09757	0.00220
24	—	0.00010
25	0.08977	0.00310
26	—	0.00010
27	0.08312	0.00190
28	—	0.00010
29	0.07738	0.00230
30	—	0.00000
31	0.07239	0.00360
32	—	0.00010
33	0.06800	0.00170
34	—	0.00010
35	0.06412	0.00310
36	—	0.00010
37	0.06065	0.00060
38	—	0.00000
39	0.05754	0.00250
40	—	0.00010

RADIATED EMISSION

Model Name :LEA100F-48
 Model No. :
 Serial No. :
 Points :1
 Detector :PEAK/QP
 Polarization :Hori.&Vert.
 Limit:[CISPR 22] Class B<3m>

Power Supply :230V(1 Phase) 50Hz
 Temp. :25degC
 Humi. :44%
 Date :1999/4/12
 Test Equip. :R3132,ESPC
 Comment :

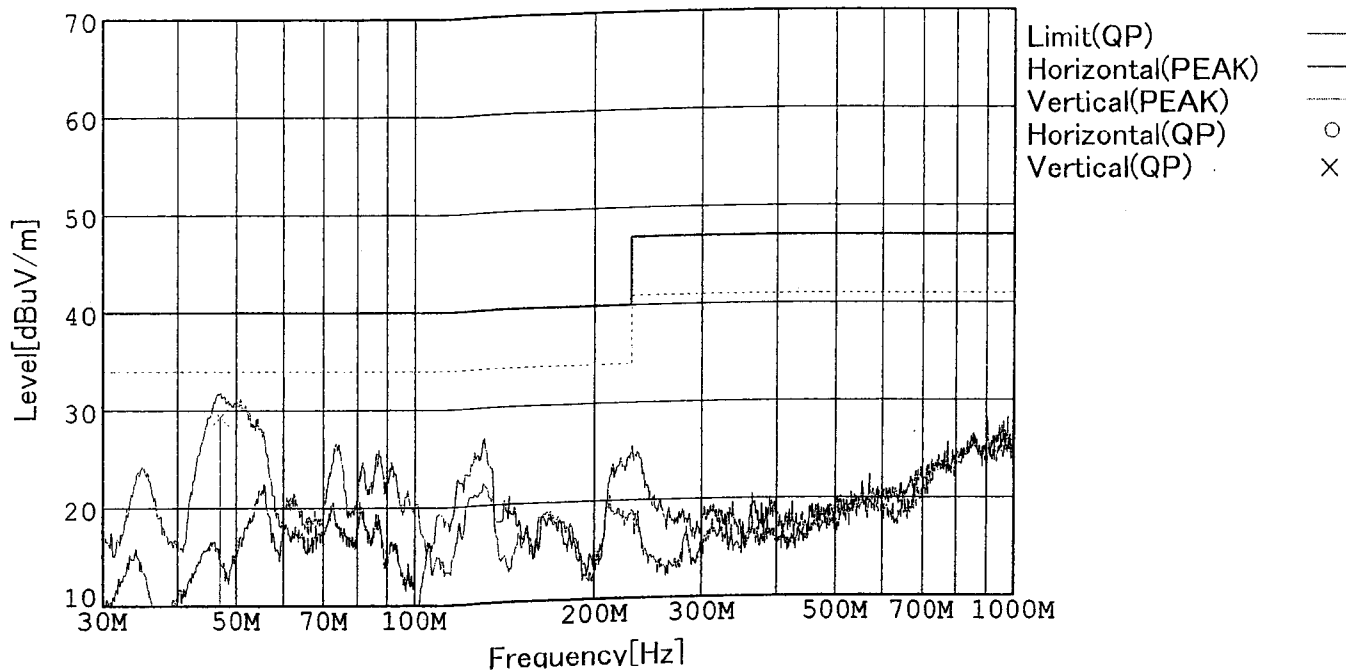


Frequency [MHz]	Meter Reading (QP) [dBuV]	Antena Factor [dBuV]	Cable & Preamp [dB]	Level (Qp) [dBuV]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
46.955	44.8	-28.7	13.2	29.3	56	122	Vert.	40.0	10.7



LINE CONDUCTION

Model Name : LEA100F-48
 Model No. :
 Serial No. :
 Points : 7
 Detector : PEAK/QP/Ave.
 Line Mode : VA/VB
 Limit1:[CISPR Pub22] Class B(QP)
 Limit2:[CISPR Pub22] Class B(Ave.)

Power Supply : 230V(1 Phase) 50Hz
 Temp. : 25degC
 Humi. : 44%
 Date : 1999/4/21
 Test Equip. : R3132,ESPC
 Comment :

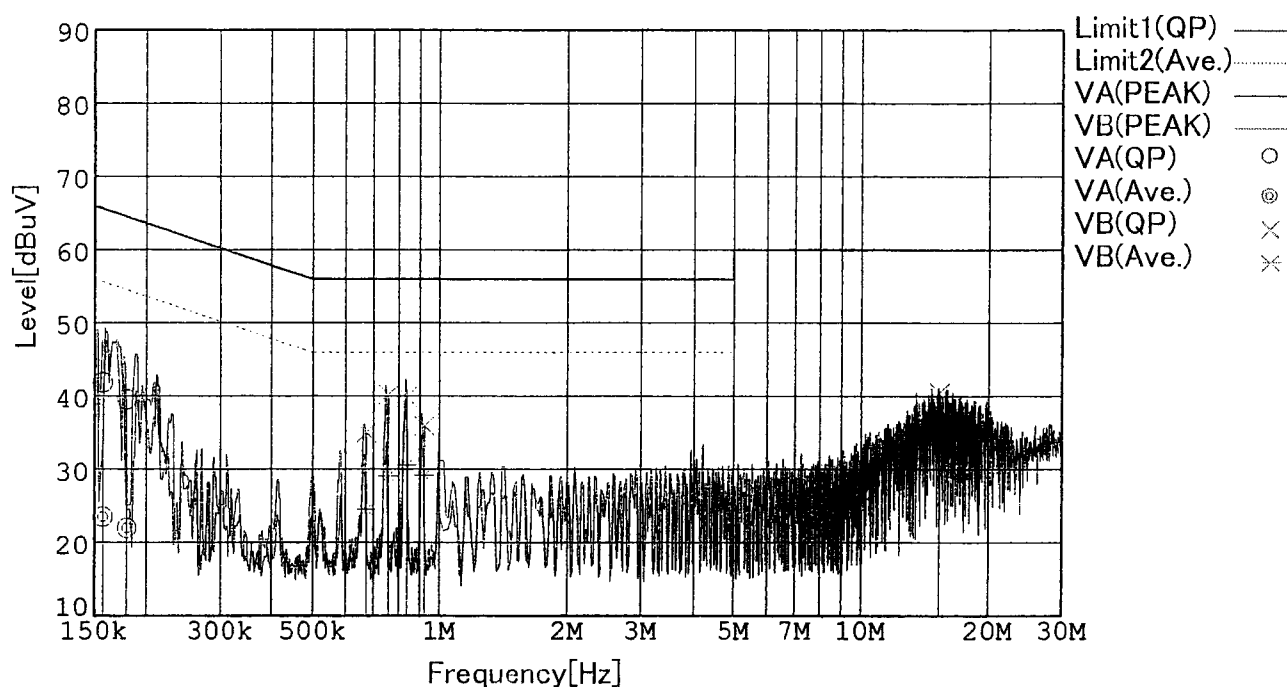

Frequency [MHz]	Meter Reading (QP) [dBuV]	Meter Reading (Ave.) [dBuV]	Factor [dB]	Level (QP) [dBuV]	Level (Ave.) [dBuV]	Line	Limit (QP) [dBuV]	Limit (Ave.) [dBuV]	Margin (QP) [dB]	Margin (Ave.) [dB]
0.1570	31.5	13.2	10.3	41.8	23.5	VA	65.6	55.6	23.8	32.1
0.1796	29.2	11.7	10.3	39.5	22.0	VA	64.5	54.5	25.0	32.5
0.6737	24.8	14.3	10.2	35.0	24.5	VB	56.0	46.0	21.0	21.5
0.7585	30.1	19.0	10.1	40.2	29.1	VB	56.0	46.0	15.8	16.9
0.8368	29.8	20.5	10.1	39.9	30.6	VB	56.0	46.0	16.1	15.4
0.9224	25.8	19.1	10.1	35.9	29.2	VB	56.0	46.0	20.1	16.8
15.3831	29.9	22.2	10.6	40.5	32.8	VB	60.0	50.0	19.5	17.2