



DATA SHEET		Date	25-Nov-10
Model	LFA100F-36	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Arataki

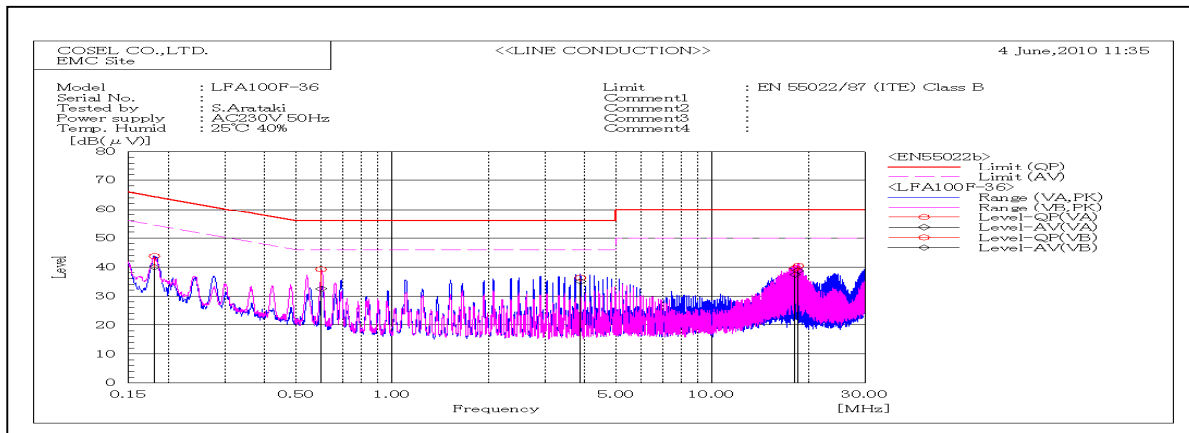

Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.18085	VA	33.8	29.9	10	43.8	39.9	64.4	54.4	20.6	14.5	Pass	
0.60011	VB	29.1	22.4	10.1	39.2	32.5	56	46	16.8	13.5	Pass	
3.87982	VA	26.1	24.8	10.2	36.3	35	56	46	19.7	11	Pass	
18.1459	VA	28.8	26.6	10.7	39.5	37.3	60	50	20.5	12.7	Pass	
18.562	VB	29.7	28.1	10.7	40.4	38.8	60	50	19.6	11.2	Pass	

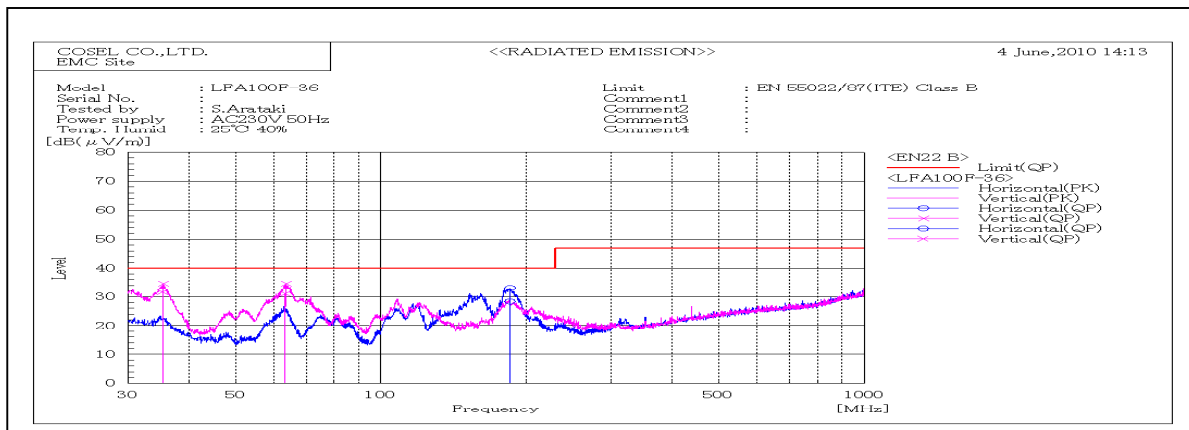


Frequency MHz	Polariz ation	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
		QP		QP	QP	QP				
35.326	V	43.9	-12.3	31.6	40	8.4	Pass	103	77	
63.394	V	53.3	-22.2	31.1	40	8.9	Pass	128	77	
184.988	H	46.5	-18.1	28.4	40	11.6	Pass	158	203	

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction

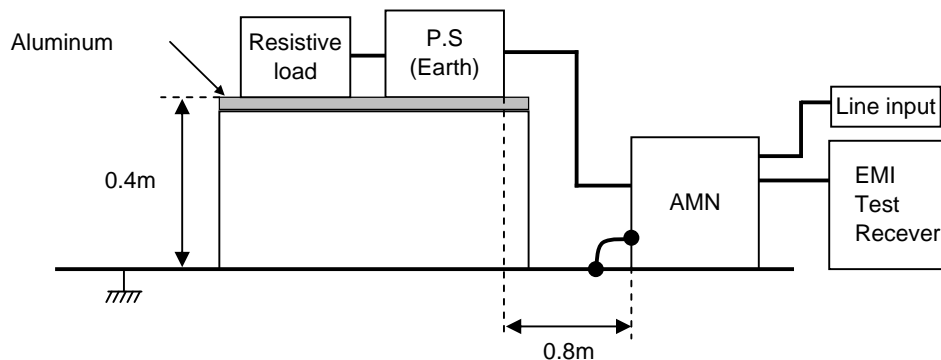

2. Radiated emission

