



EXTRA TEST DATA OF LFA10F-24

*Regulated DC Power Supply
Jul, 27, 2020*




COSEL CO.,LTD.

CONTENTS




1.Inrush Current (enlargement)	1
2.Dynamic Line Regulation	2
3.Overtoltage Protection (waveform)	3
4.Hiccup cycle (by Overcurrent Protection)	4
5.Figure of Testing Circuitry	5

(Final Page 5)

Model	LFA10F-24	Temperature	25°C
Item	Inrush Current (enlargement)	Testing Circuitry	A
Object	_____		

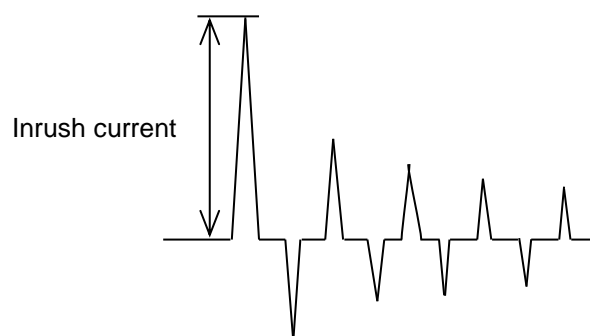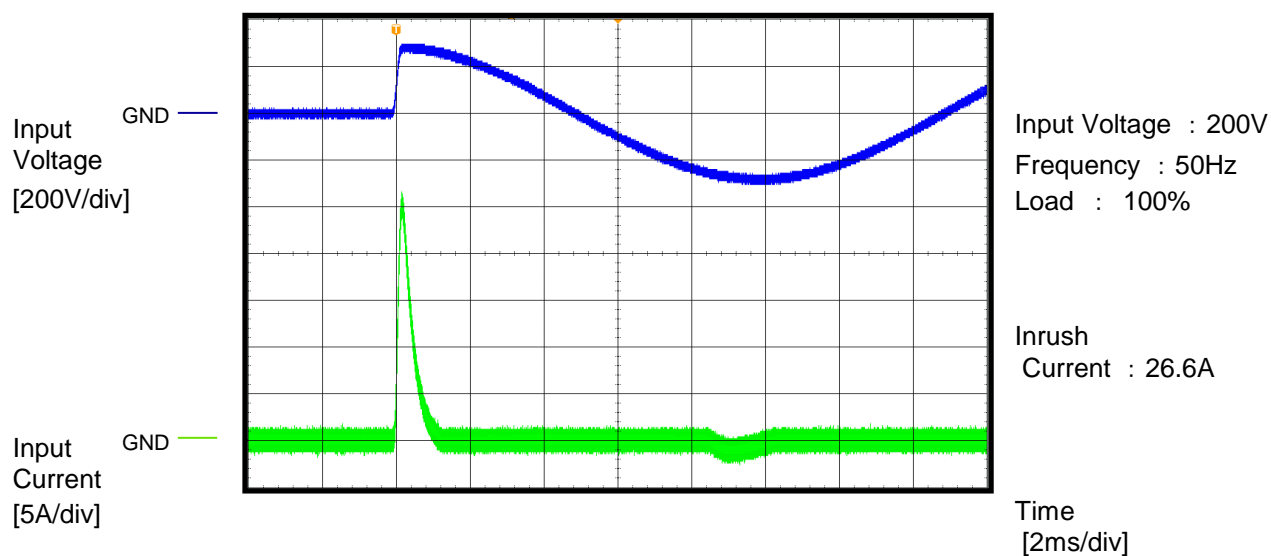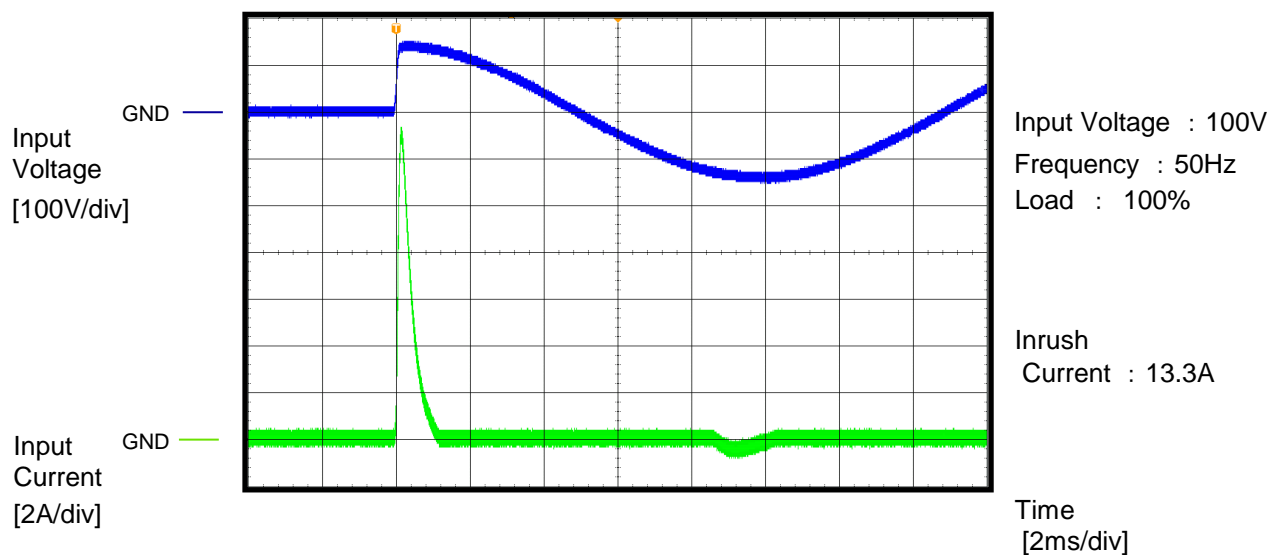


Model	LFA10F-24	Temperature	25°C
Item	Dynamic Line Regulation	Testing Circuitry	A
Object	_____		

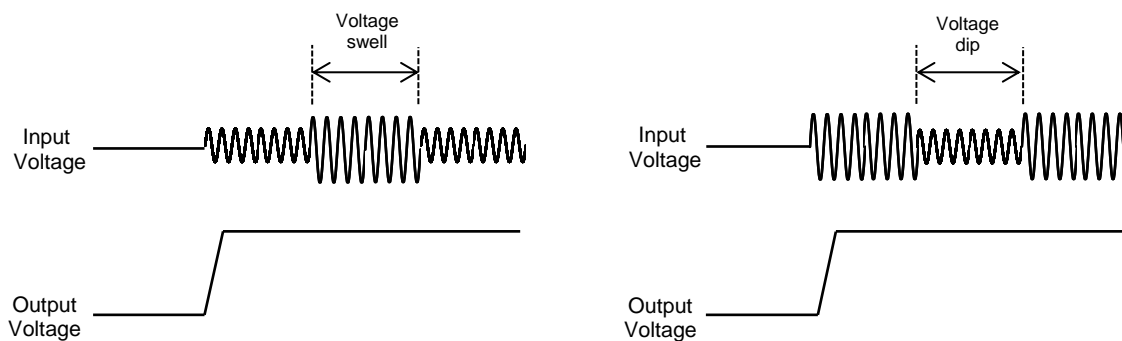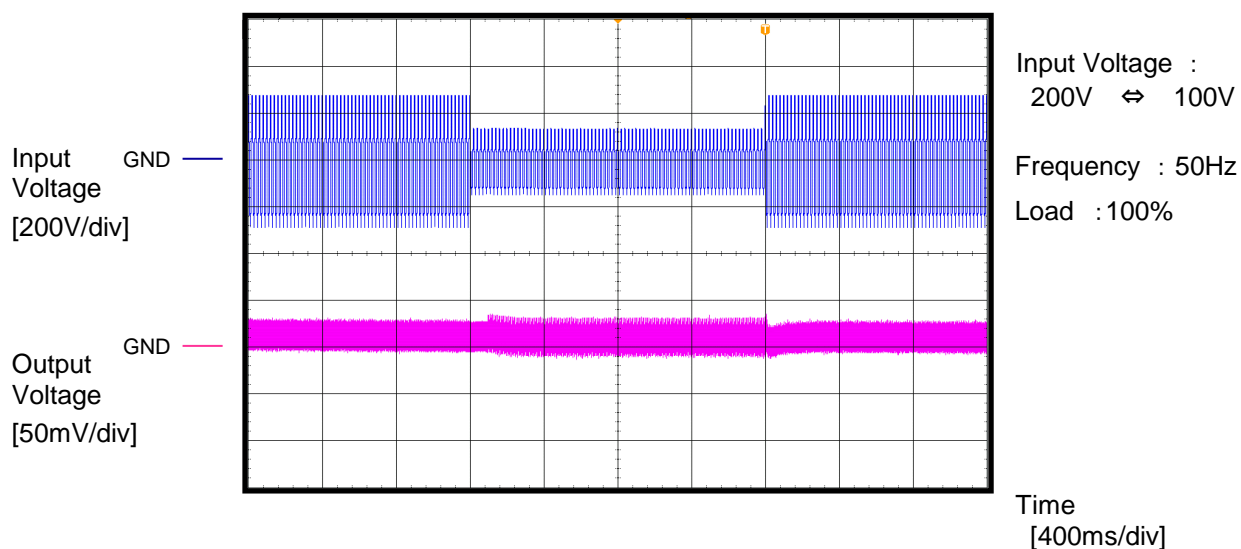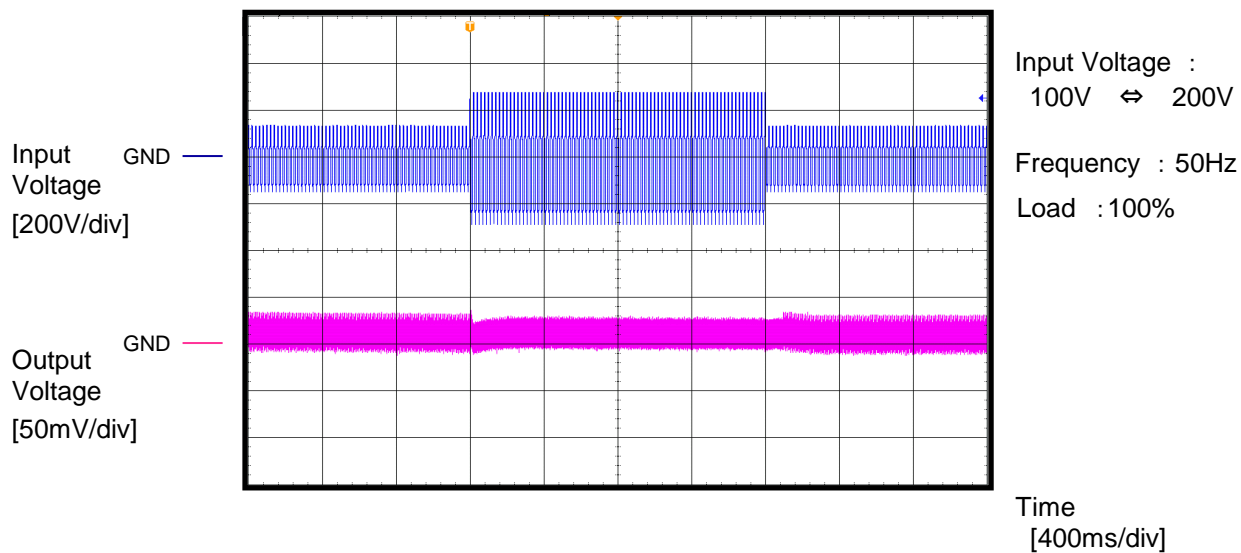

Model	LFA10F-24	Temperature	25°C
Item	Over Voltage Protection	Testing Circuitry	A
Object		Input Voltage : 100V	

Output Voltage
[5V/div]

GND

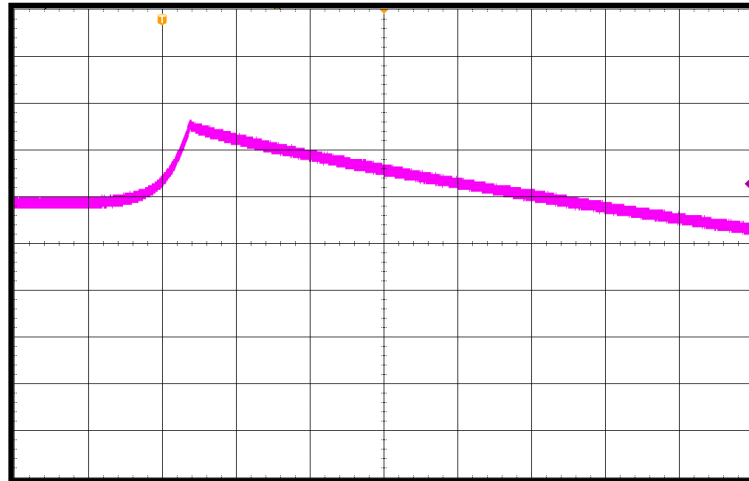


Load : 0%
Overvoltage protection
value : 33.2V

Time
[40ms/div]


Output Voltage
[5V/div]

GND

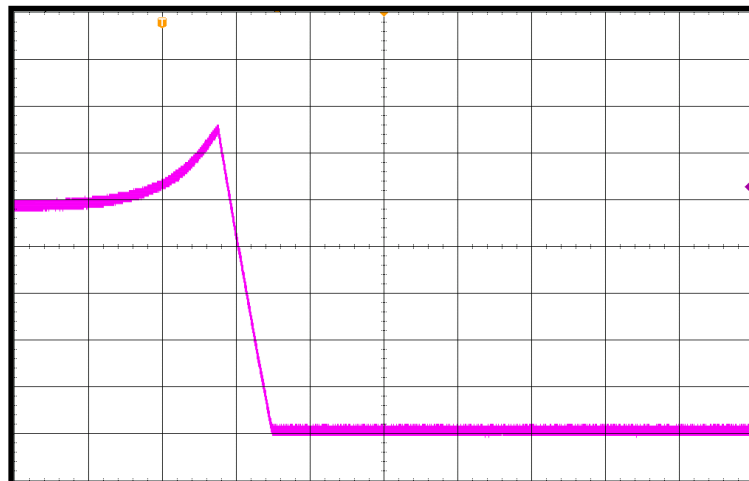


Load : 100%
Overvoltage protection
value : 33V

Time
[20ms/div]

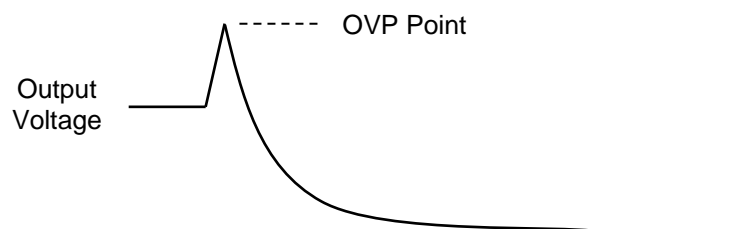

Model	LFA10F-24	Temperature	25°C
Item	Short Circuit Current	Testing Circuitry	A
Object		Load	: Short

Output Current
[1A/div]

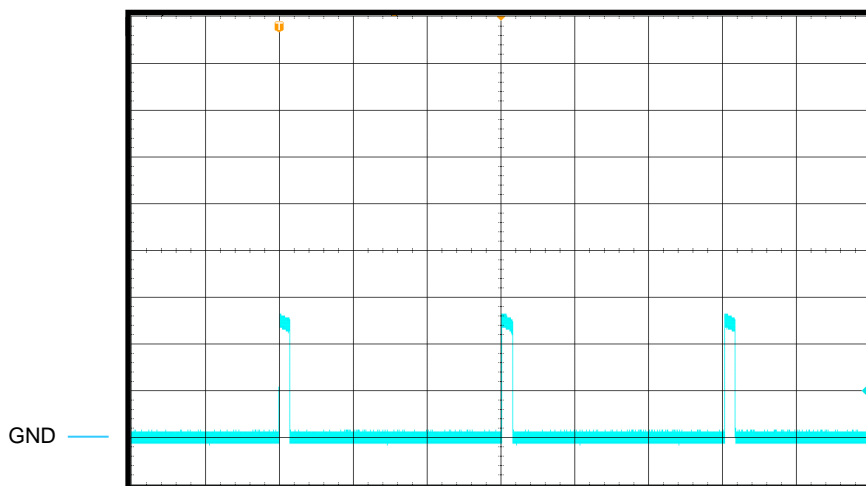

Input Voltage : 100V


Short-circuit
current : 2.6A

ON Time : 28ms

Hiccup mode
time : 604ms

Time
[200ms/div]

Output Current
[1A/div]

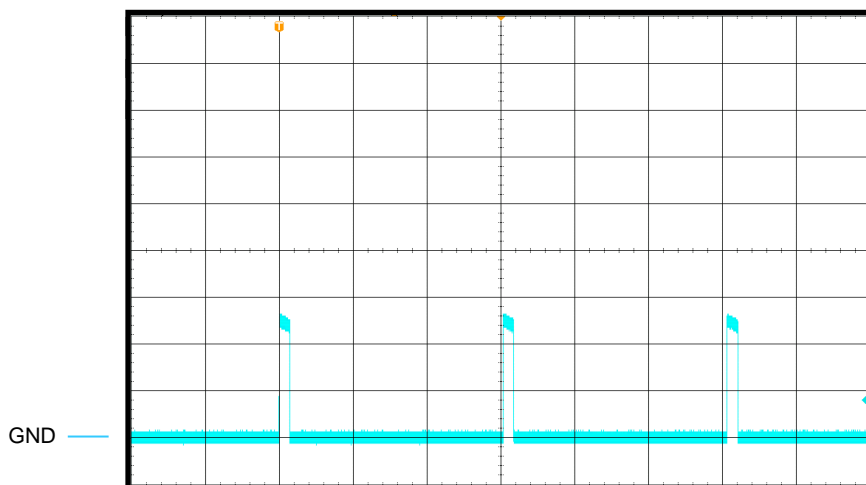


Input Voltage : 200V

Short-circuit
current : 2.6A

ON Time : 29ms

Hiccup mode
time : 607ms

Time
[200ms/div]

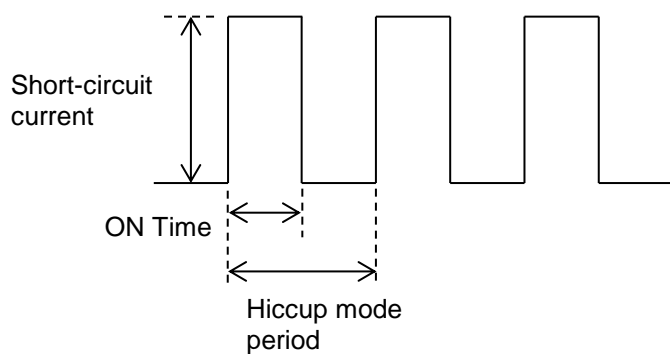

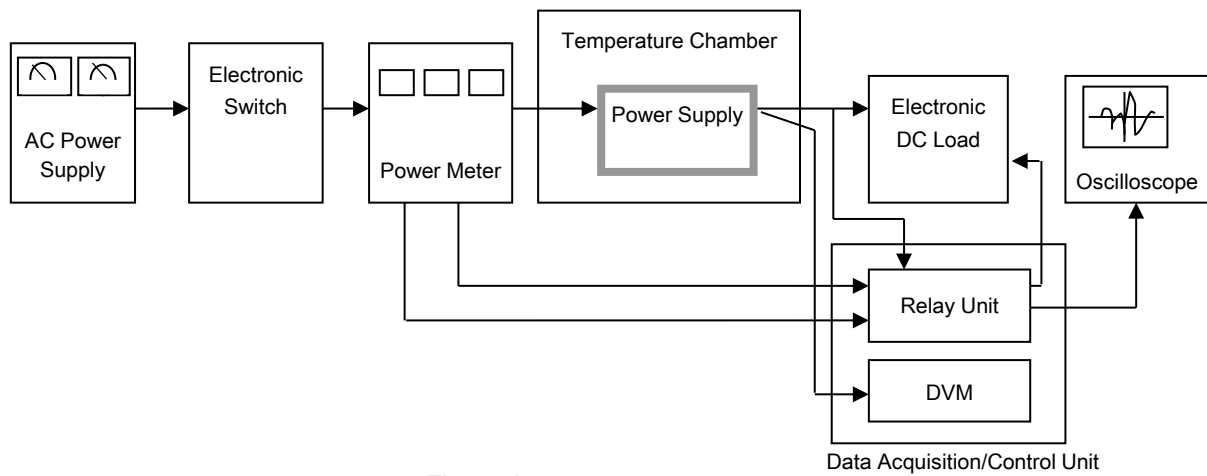


Figure A