


DATA SHEET		Date	07-May-09
Model	LFA10F-5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45% RH
		Tested by	Y.NAKAMURA

LINE CONDUCTION

Model Name : LFA10F-5
 Model No. :
 Serial No. :
 Points : 4
 Detector : PEAK/QP/Ave.
 Line Mode : VA/VB
 Power Supply : AC 230V 50Hz
 Limit1: [EN 55022] Class B (QP)
 Limit2: [EN 55022] Class B (Ave.)

Temp. : 25 degreeC
 Humi. : 45 %
 Date : 2009/5/7 16:30
 Test Equip. : R3132, ESPC
 Load Line : 150mm
 Comment :

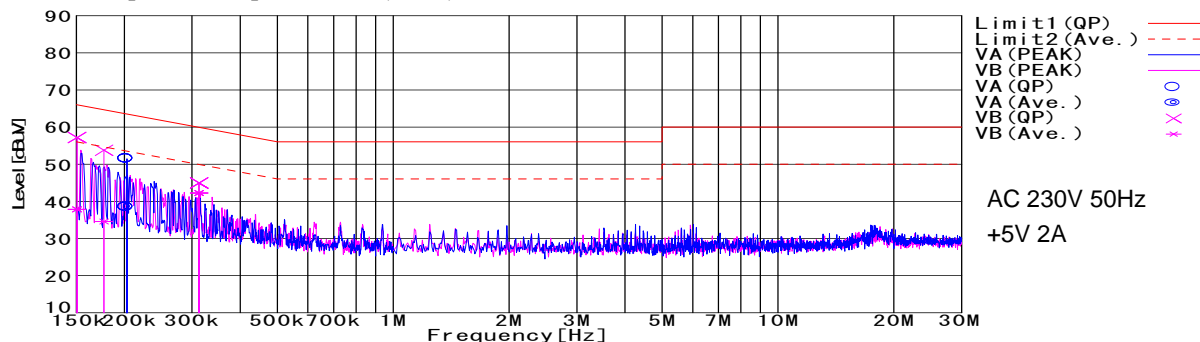


Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.203	28.5	41.3	10	38.5	51.3	VA	53.5	63.5	15	12.2
0.1508	27.9	47.2	10	37.9	57.2	VB	56	66	18.1	8.8
0.1772	24.6	43.8	10	34.6	53.8	VB	54.6	64.6	20	10.8
0.3129	32.3	34.9	10	42.3	44.9	VB	49.9	59.9	7.6	15

RADIATED EMISSION

Model Name : LFA10F-5
 Model No. :
 Serial No. : 3
 Points : PEAK/QP
 Polarization : Hori. & Vert.
 Power Supply : AC 230V 50Hz
 Limit: [EN 55022] Class B<3m>

Temp. : 25 degreeC
 Humi. : 45 %
 Date : 2009/4/28 13:41
 Test Equip. : R3132, ESPC
 Load Line : 150mm
 Comment :

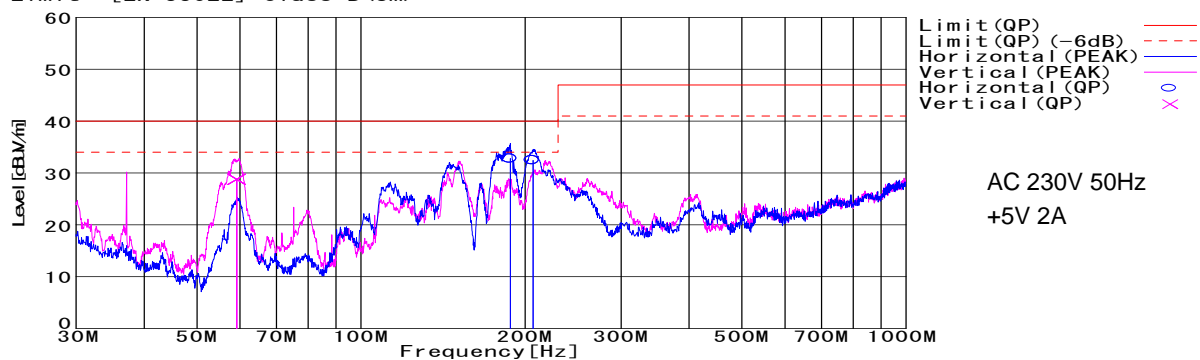


Frequency [MHz]	Meter Reading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
188.1	55.8	BL	8.3	-31.3	32.8	5	157	Hori.	40	7.2
206.964	55.1	BL	8.6	-31.3	32.4	340	145	Hori.	40	7.6
59.113	56	BL	4.8	-32	28.8	352	123	Vert.	40	11.2

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction

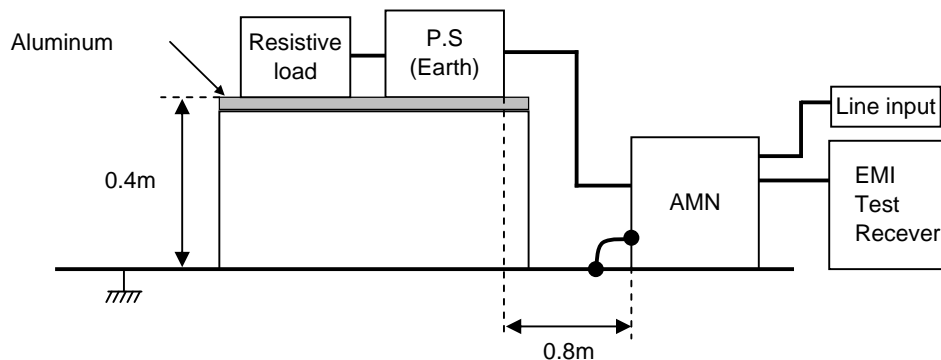

2. Radiated emission

