



DATA SHEET		Date	25-Nov-10
Model	LFA150F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	D.Sumiya

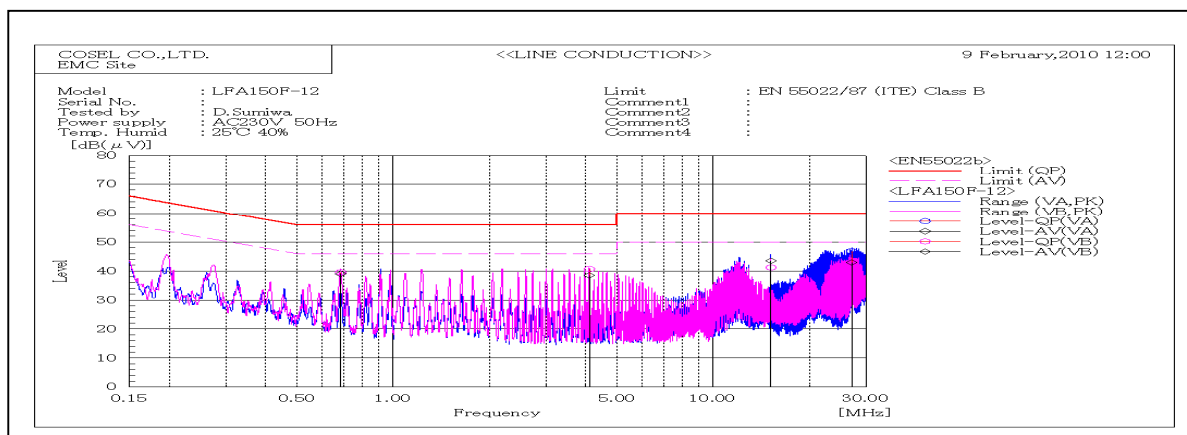

Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.68685	VB	29.6	29	10	39.6	39	56	46	16.4	7	Pass	
4.10698	VB	30.5	28.3	10.2	40.7	38.5	56	46	15.3	7.5	Pass	
15.1615	VB	30.4	32.7	10.8	41.2	43.5	60	50	18.8	6.5	Pass	
27.1097	VA	36.1	32.1	10.8	46.9	42.9	60	50	13.1	7.1	Pass	

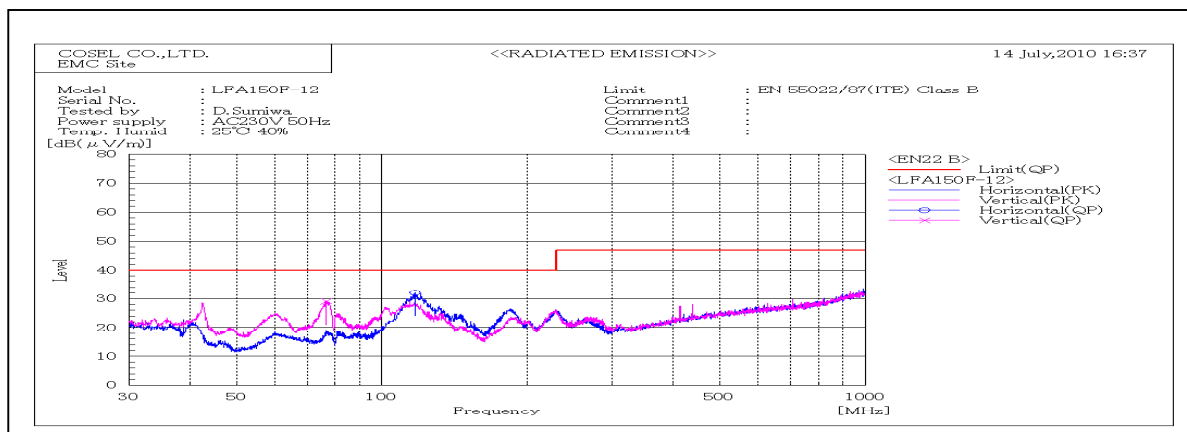

Frequency MHz	Polarization	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)		Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
					QP	QP					
76.8	V	53.8	-24.8	29	40	40	11	Pass	160	78	
117.064	H	51.5	-19.4	32.1	40	40	7.9	Pass	160	6	

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction



2. Radiated emission

