



DATA SHEET		Date	25-Nov-10
Model	LFA150F-36	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Mukaiyama

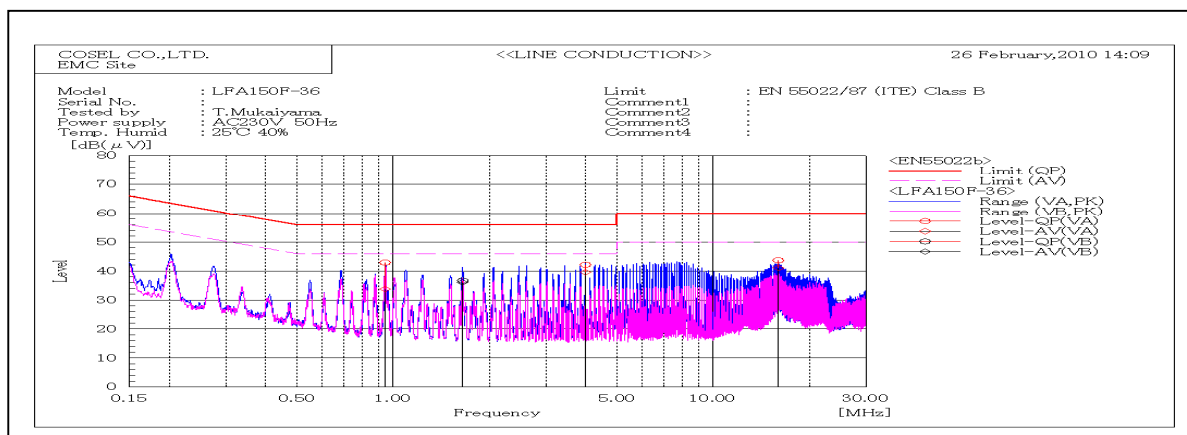

Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.94418	VA	32.8	23.7	10.1	42.9	33.8	56	46	13.1	12.2	Pass	
1.65106	VB	26.6	26	10.1	36.7	36.1	56	46	19.3	9.9	Pass	
3.99349	VA	32	29.3	10.2	42.2	39.5	56	46	13.8	6.5	Pass	
15.9773	VA	33.1	30.5	10.6	43.7	41.1	60	50	16.3	8.9	Pass	

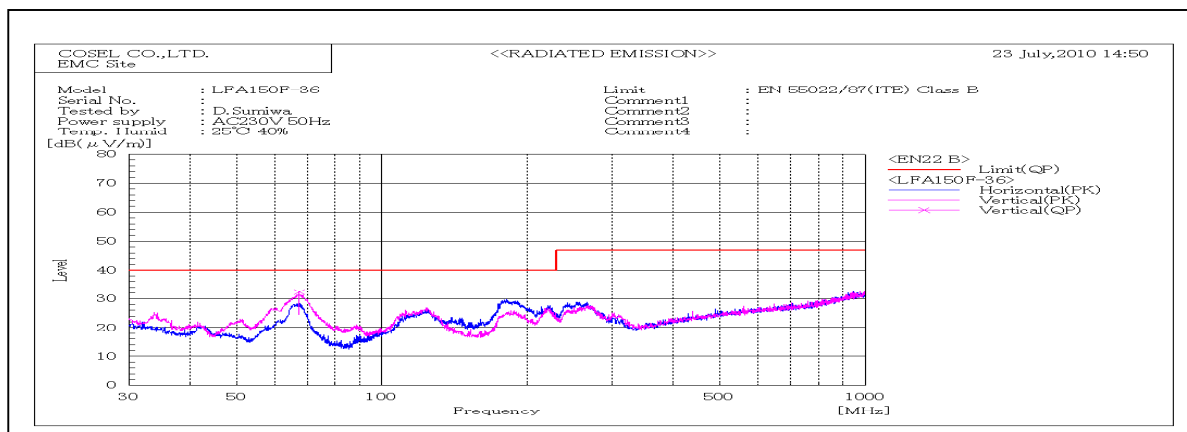


Frequency MHz	Polarization	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
					QP	QP				
67.31	V	54.3	-22	32.3	40	7.7	Pass	160	353	

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction

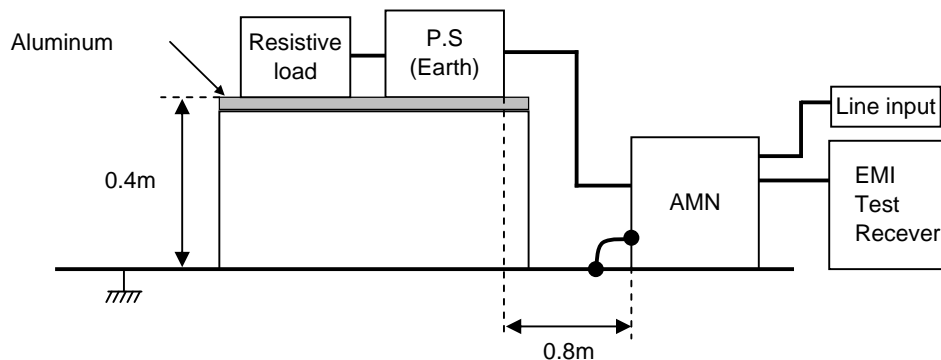

2. Radiated emission

