


DATA SHEET		Date	07-May-09
Model	LFA15F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45% RH
		Tested by	Y.NAKAMURA

**LINE CONDUCTION**  
 Model Name : LFA15F-15  
 Model No. :  
 Serial No. :  
 Points : 6  
 Detector : PEAK/QP/Ave.  
 Line Mode : VA/VB  
 Power Supply : AC 230V 50Hz  
 Limit1: [EN 55022] Class B (QP)  
 Limit2: [EN 55022] Class B (Ave.)


Temp. : 25 degreeC  
 Humi. : 45 %  
 Date : 2009/5/7 18:56  
 Test Equip. : R3132, ESPC  
 Load Line : 150mm  
 Comment :

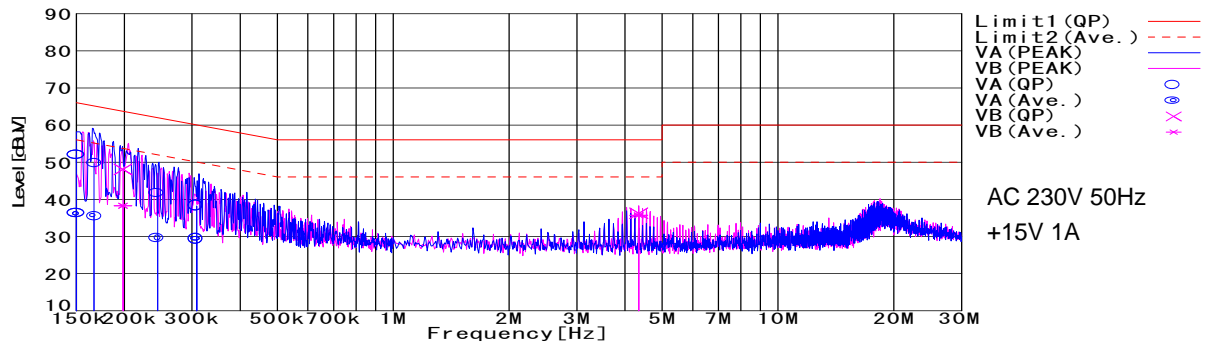

Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.1502	26.1	41.9	10	36.1	51.9	VA	56	66	19.9	14.1
0.167	25.5	39.6	10	35.5	49.6	VA	55.1	65.1	19.6	15.5
0.2442	19.5	31.6	10	29.5	41.6	VA	52	62	22.5	20.4
0.3084	19.3	28.2	10	29.3	38.2	VA	50	60	20.7	21.8
0.1984	28.3	38.1	10	38.3	48.1	VB	53.7	63.7	15.4	15.6
4.346	25.4	25.9	10.3	35.7	36.2	VB	46	56	10.3	19.8

**RADIATED EMISSION**  
 Model Name : LFA15F-15  
 Model No. :  
 Serial No. :  
 Points : 1  
 Detector : PEAK/QP  
 Polarization : Horizontal  
 Power Supply : AC 230V 50Hz  
 Limit: [EN 55022] Class B<3m>

Temp. : 25 degreeC  
 Humi. : 45 %  
 Date : 2009/7/2 19:08  
 Test Equip. : R3132, ESPC  
 Load Line : 15mm  
 Comment :

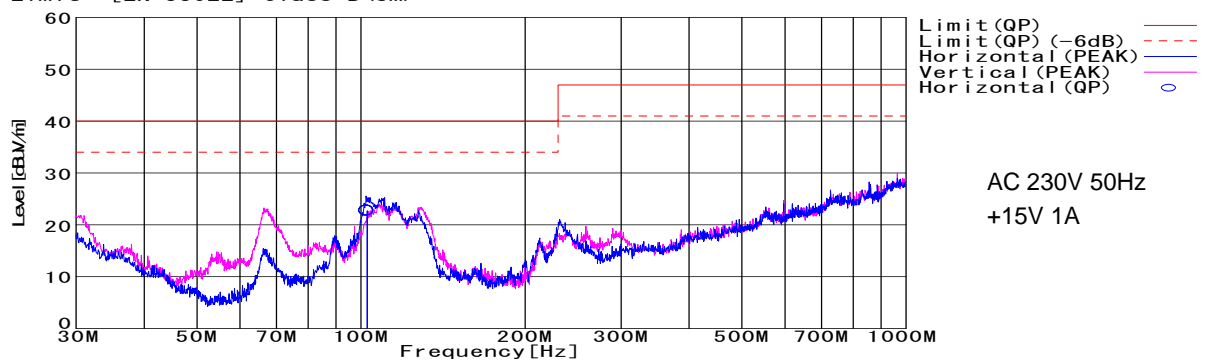


Frequency [MHz]	MeterReading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
102.732	44.4	BL	10	-31.7	22.7	2	143	Hori.	40	17.3

## DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

### 1. Line conduction

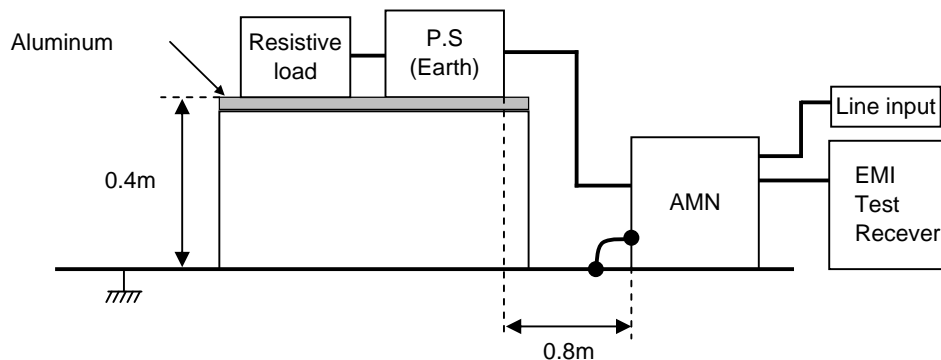

### 2. Radiated emission

