


DATA SHEET		Date	07-May-09
Model	LFA15F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45% RH
		Tested by	Y.NAKAMURA

**LINE CONDUCTION**  
 Model Name : LFA15F-24  
 Model No. :  
 Serial No. :  
 Points : 7  
 Detector : PEAK/QP/Ave.  
 Line Mode : VA/VB  
 Power Supply : AC 230V 50Hz  
 Limit1: [EN 55022] Class B (QP)  
 Limit2: [EN 55022] Class B (Ave.)


Temp. : 25 degreeC  
 Humi. : 45 %  
 Date : 2009/5/7 19:06  
 Test Equip. : R3132, ESPC  
 Load Line : 150mm  
 Comment :

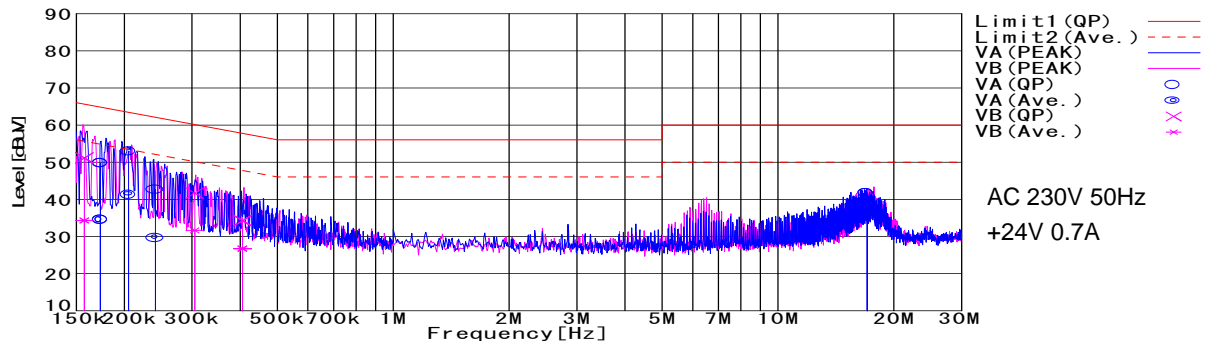

Frequency [MHz]	Meter Reading (Ave.) [dBu]	Meter Reading (QP) [dBu]	Factor [dB]	Level(Ave.) [dBu]	Level(QP) [dBu]	Line	Limit(Ave.) [dBu]	Limit(QP) [dBu]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.1733	24.4	39.6	10	34.4	49.6	VA	54.8	64.8	20.4	15.2
0.2053	31.3	43	10	41.3	53	VA	53.4	63.4	12.1	10.4
0.2411	19.6	32.6	10	29.6	42.6	VA	52.1	62.1	22.5	19.5
17.0613	25.7	31.1	10.7	36.4	41.8	VA	50	60	13.6	18.2
0.1574	24.4	41.1	10	34.4	51.1	VB	55.6	65.6	21.2	14.5
0.3048	21.7	31.7	10	31.7	41.7	VB	50.1	60.1	18.4	18.4
0.4057	16.7	24.3	10	26.7	34.3	VB	47.7	57.7	21	23.4

**RADIATED EMISSION**  
 Model Name : LFA15F-24  
 Model No. :  
 Serial No. : 2  
 Points : PEAK/QP  
 Detector : Hori. & Vert.  
 Polarization : AC 230V 50Hz  
 Power Supply : AC 230V 50Hz  
 Limit: [EN 55022] Class B<3m>

Temp. : 25 degreeC  
 Humi. : 45 %  
 Date : 2009/5/25 15:40  
 Test Equip. : R3132, ESPC  
 Load Line : 150mm  
 Comment :

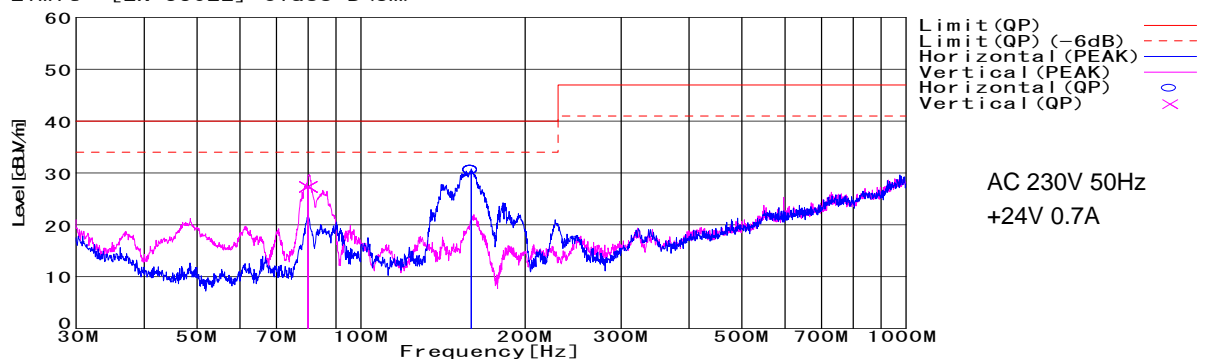

Frequency [MHz]	MeterReading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
159.337	52.1	BL	10	-31.5	30.6	17	159	Hori.	40	9.4
79.996	52.2	BL	7	-31.9	27.3	354	121	Vert.	40	12.7

## DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

### 1. Line conduction



### 2. Radiated emission

