



DATA SHEET		Date	28-Dec-10
Model	LFA300F-12-TY	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	M.Akasofu

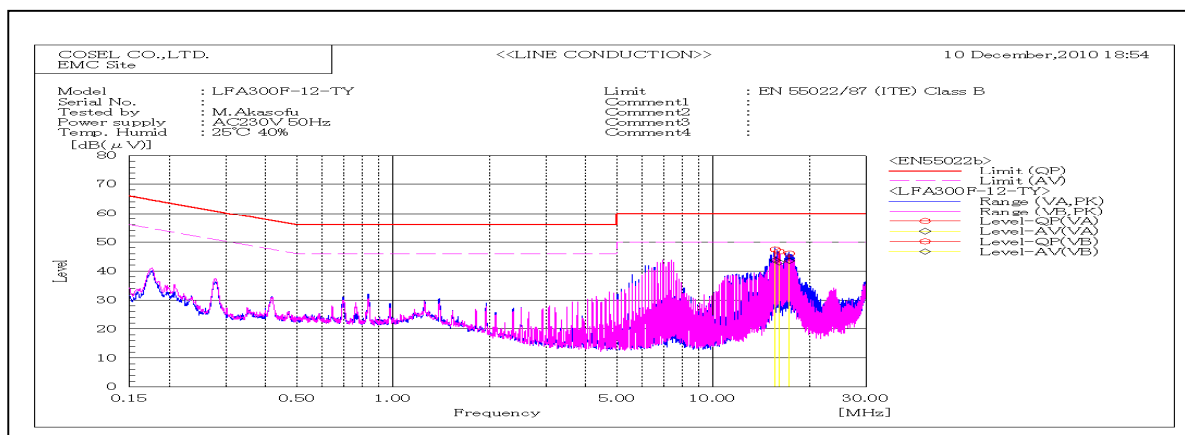

Frequency MHz	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
15.64315	VA	36.6	32.9	10.8	47.4	43.7	60	50	12.6	6.3	Pass	
16.06245	VB	35.8	32.1	10.9	46.7	43	60	50	13.3	7	Pass	
17.324	VA	35.2	32.7	10.8	46	43.5	60	50	14	6.5	Pass	

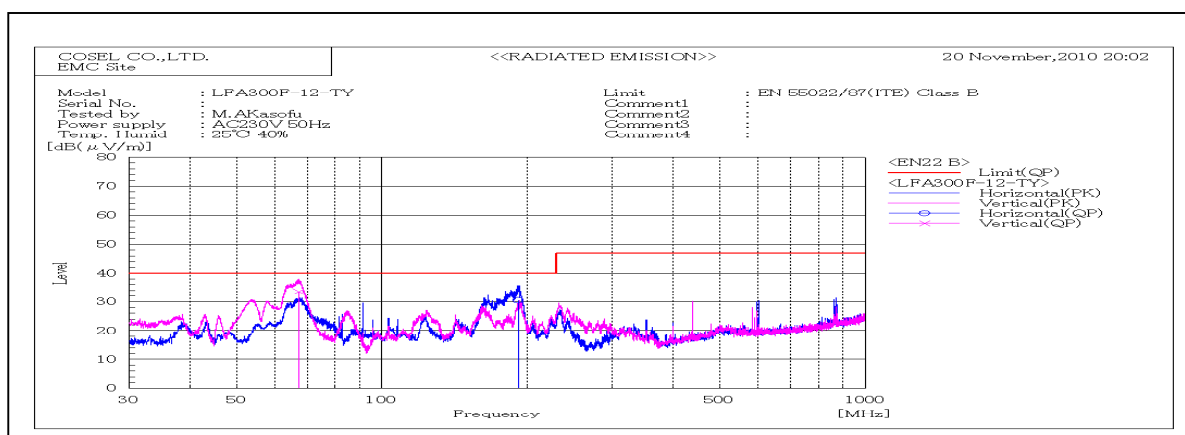

Frequency MHz	Polariz ation	Stability	Reading dB(uV)		Space Loss dB	Level dB(mW)		Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP	AV		QP	AV					
67.323	V	Stable	55.6	-22		33.6	40	6.4	Pass	116	230	
191.237	H	Stable	48.6	-18.1		30.5	40	9.5	Pass	159	89	

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction



2. Radiated emission

