



DATA SHEET

Date		28-Dec-10	
Model	LFA300F-24-TY	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	M.Akasofu

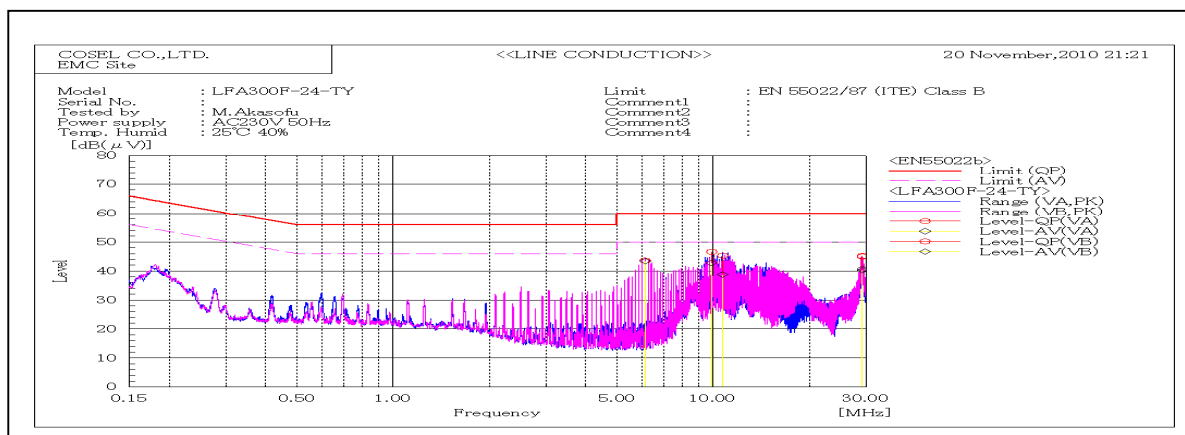

Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
6.13454	VB	33.2	33	10.4	43.6	43.4	60	50	16.4	6.6	Pass	
9.89884	VB	36	32.2	10.6	46.6	42.8	60	50	13.4	7.2	Pass	
10.7003	VA	34.7	28.2	10.6	45.3	38.8	60	50	14.7	11.2	Pass	
29.2824	VB	34	29.2	11	45	40.2	60	50	15	9.8	Pass	
29.28255	VA	34.6	30.1	10.6	45.2	40.7	60	50	14.8	9.3	Pass	

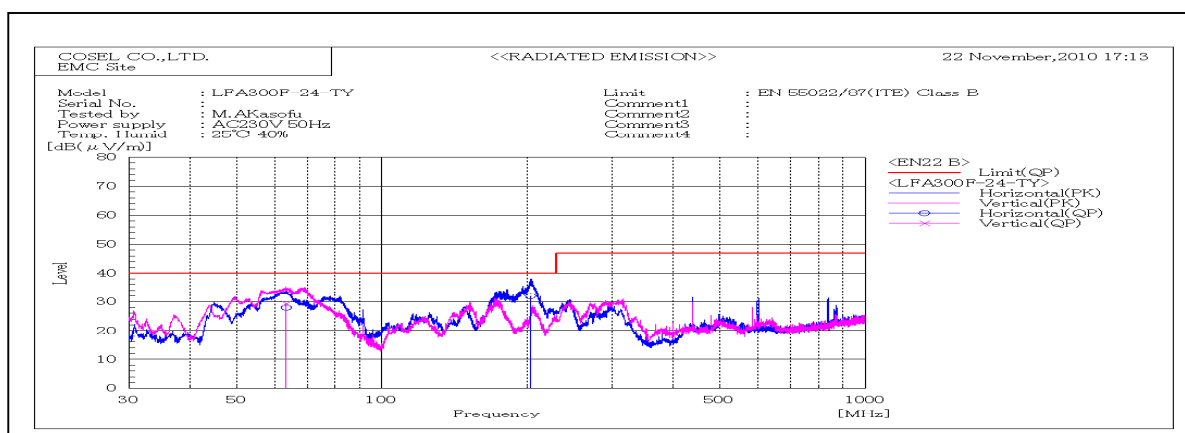


Frequency MHz	Polariz ation	Stability	Reading dB(μV)		Space Loss dB	Level dB(mW)		Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP	AV		QP	AV					
63.417	V	Stable	51.8	-22.5		29.3		40	10.7	110	34	
63.392	H	Stable	50.5	-22.5		28		40	12	154	40	
202.93	H	Stable	49.9	-17.9		32		40	8	154	275	

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction

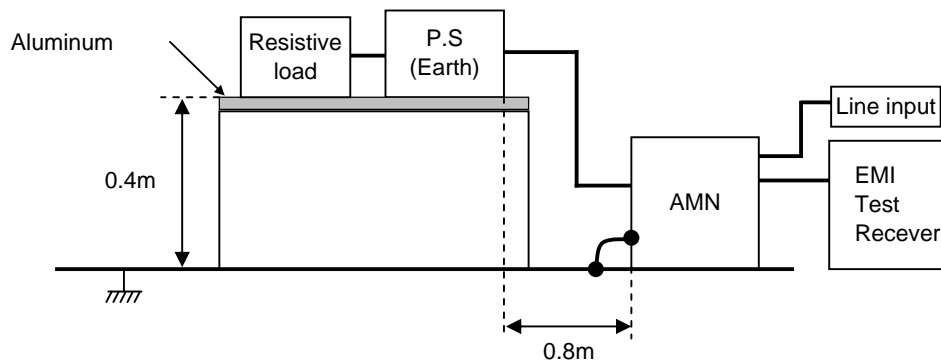

2. Radiated emission

