



EXTRA TEST DATA OF LFA300F-48-TY

Regulated DC Power Supply
Nov, 02, 2020




COSEL CO.,LTD.

CONTENTS




1.Inrush Current (enlargement)	1
2.Dynamic Line Regulation	2
3.Overvoltage Protection (waveform)	3
4.Hiccup cycle (by Overcurrent Protection)	4
5.Power consumption by remote off	5
6.Figure of Testing Circuitry	6

(Final Page 6)

Model	LFA300F-48-TY	Temperature 25°C Testing Circuitry A	
Item	Inrush Current (enlargement)		
Object	_____		

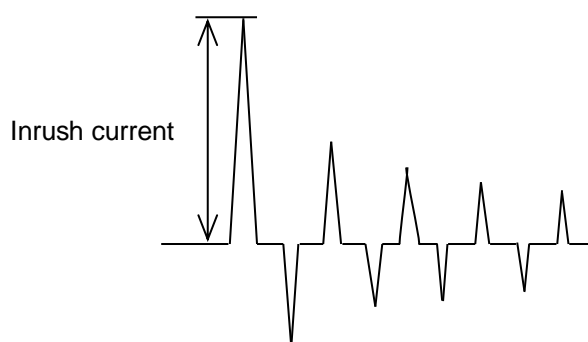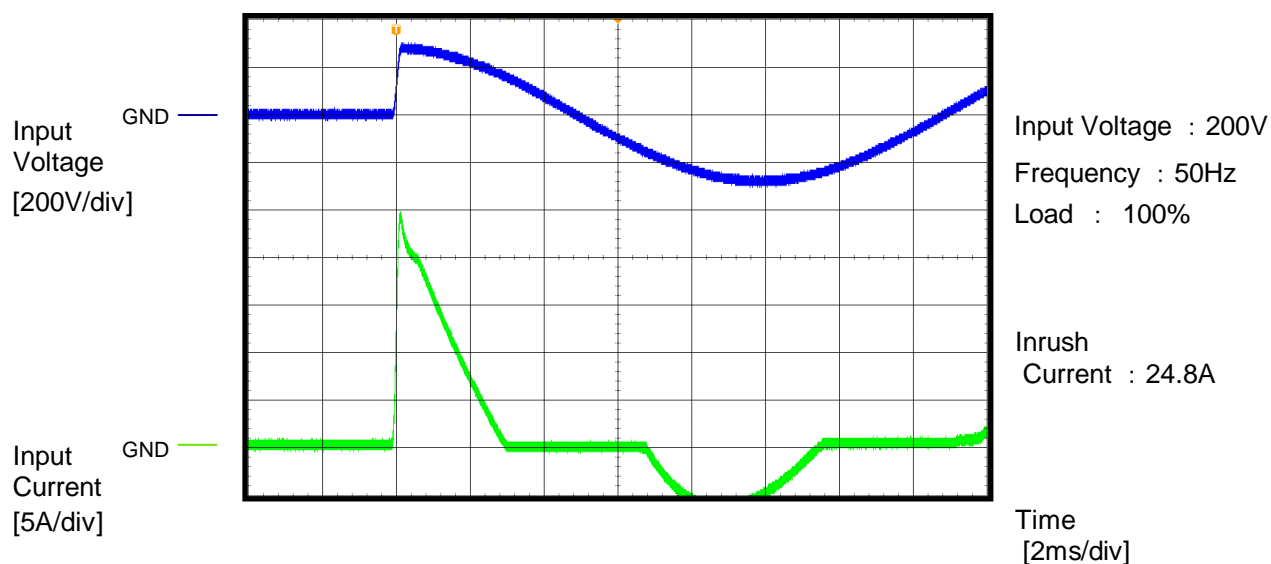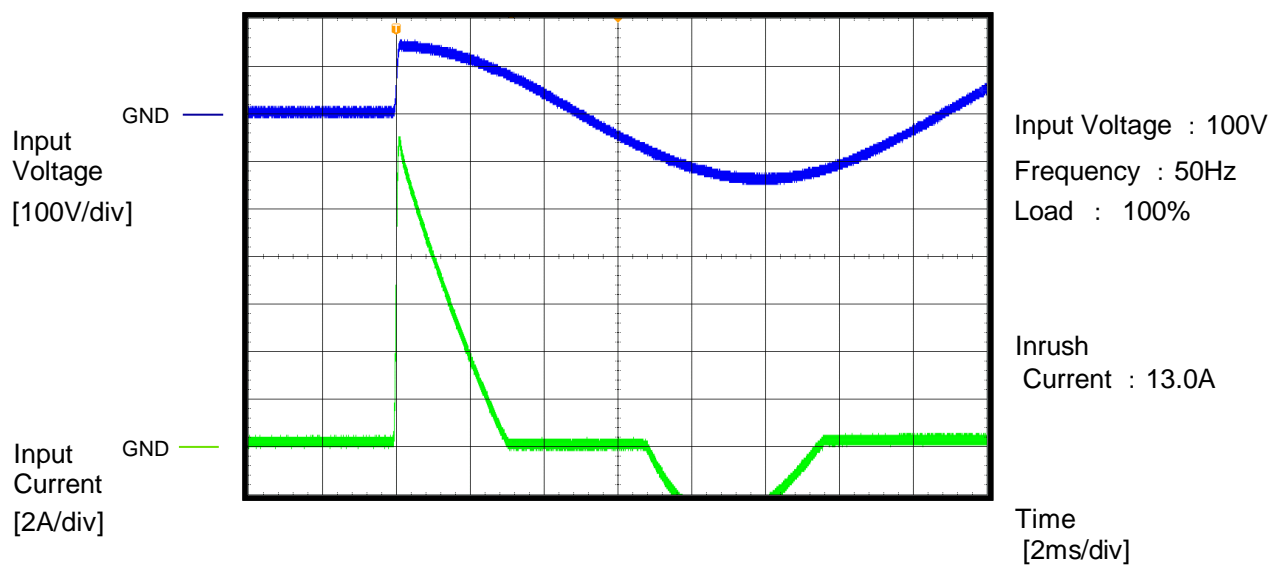


Model	LFA300F-48-TY	Temperature 25°C Testing Circuitry A	
Item	Dynamic Line Regulation		
Object	_____		

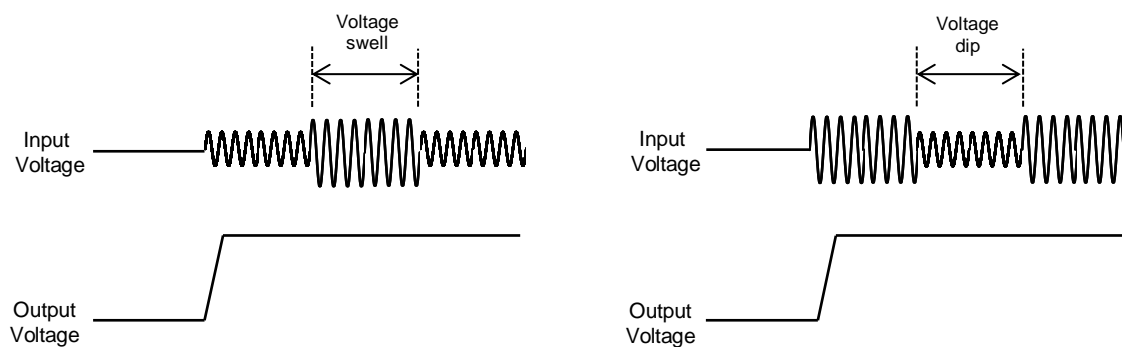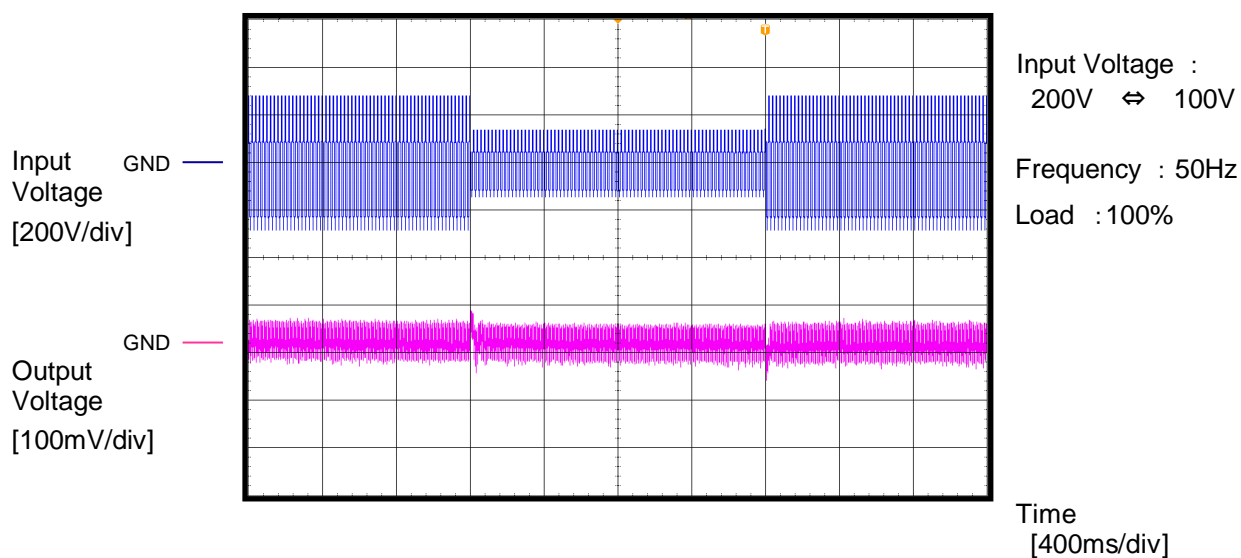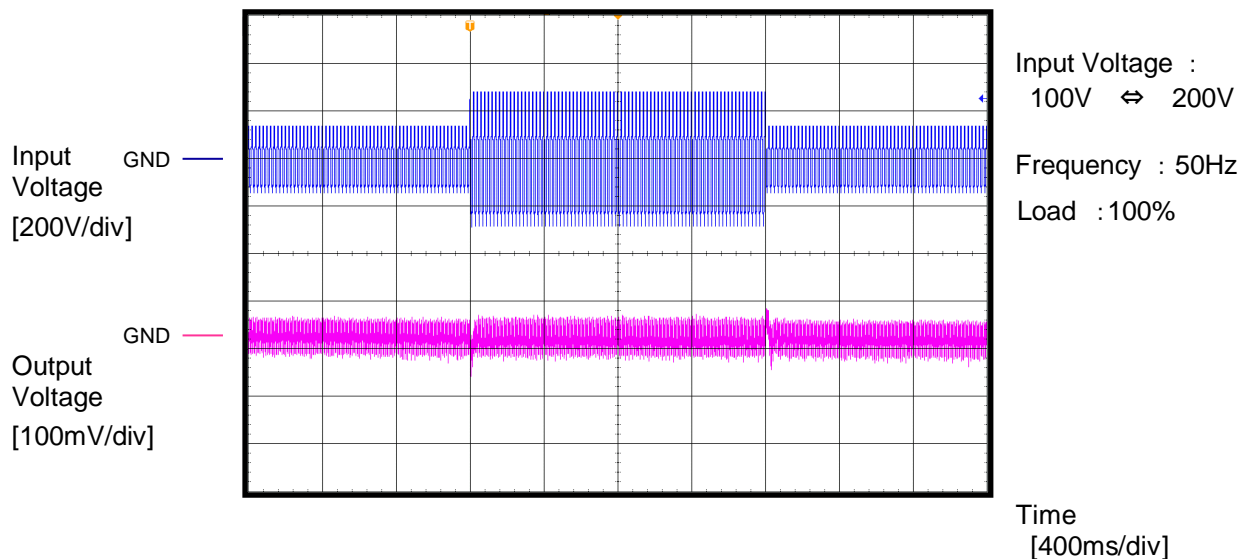

		Temperature 25°C Testing Circuitry A Input Voltage : 100V
Model	LFA300F-48-TY	
Item	Over Voltage Protection	
Object	_____	

Output
Voltage
[10V/div]

GND

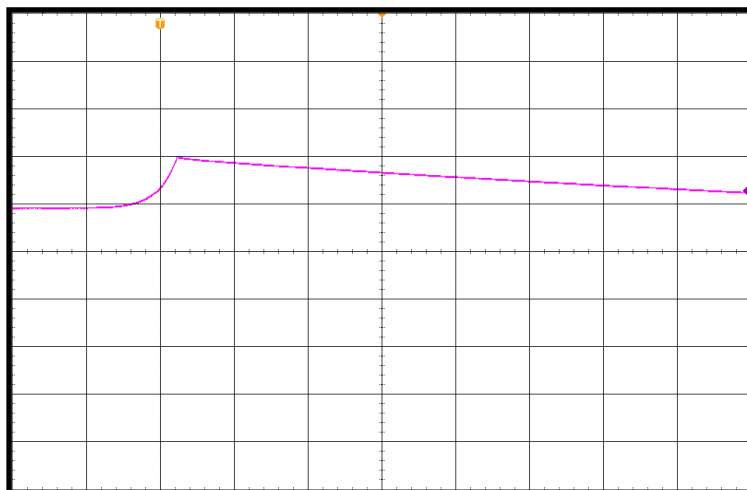


Load : 0%
Overvoltage protection
value : 59.9V

Time
[40ms/div]


Output
Voltage
[10V/div]

GND

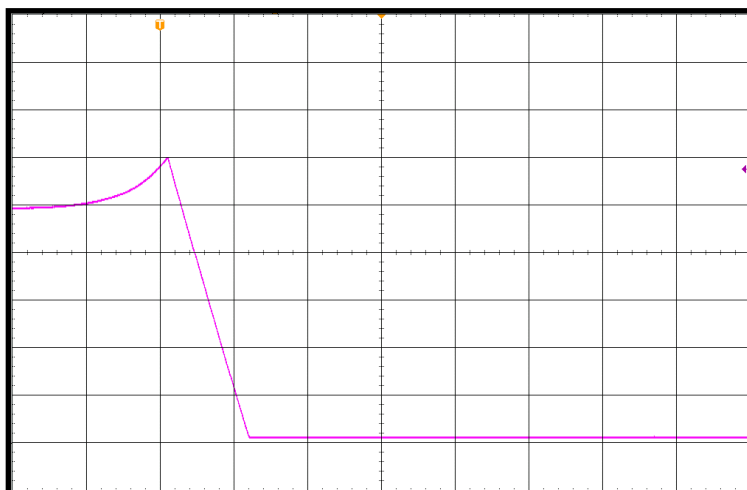


Load : 100%
Overvoltage protection
value : 59.8V

Time
[20ms/div]

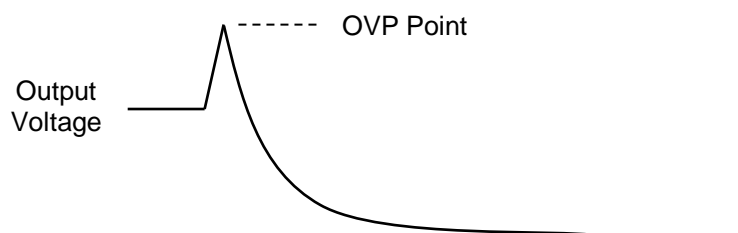

		Temperature 25°C Testing Circuitry A Load : Short
Model	LFA300F-48-TY	
Item	Short Circuit Current	
Object	_____	

Output Current
[2A/div]

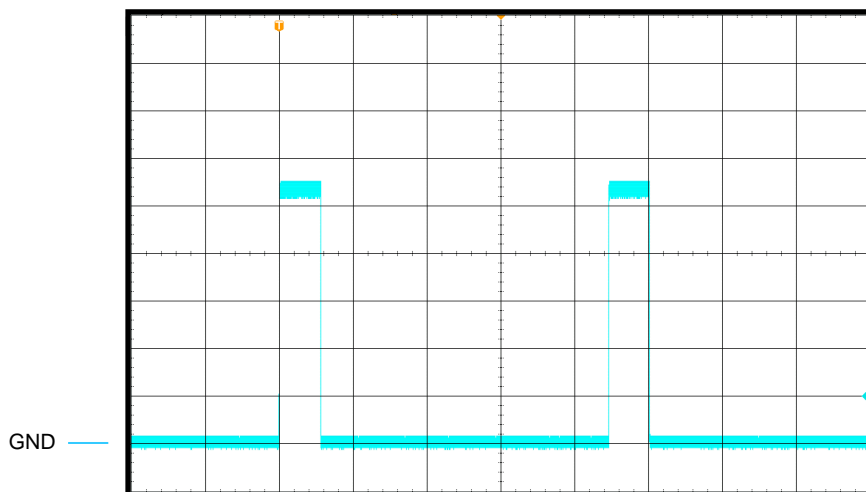

Input Voltage : 100V


Short-circuit current : 11A

ON Time : 1123ms

Hiccup mode time : 8923ms

Time
[2000ms/div]

Output Current
[2A/div]

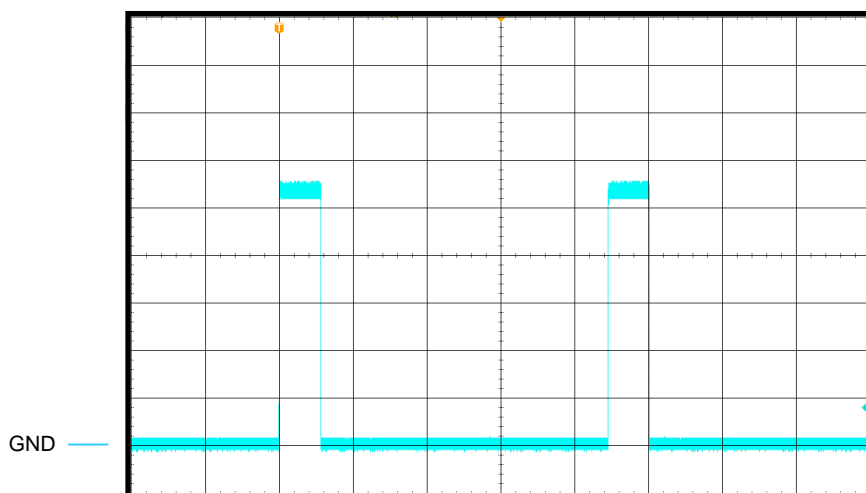


Input Voltage : 200V



Short-circuit current : 11.1A

ON Time : 1120ms

Hiccup mode time : 8907ms

Time
[2000ms/div]

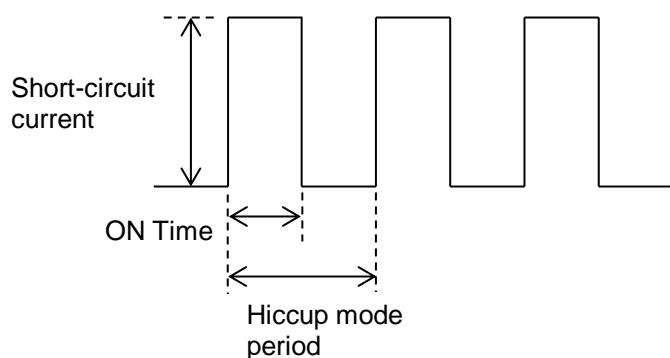

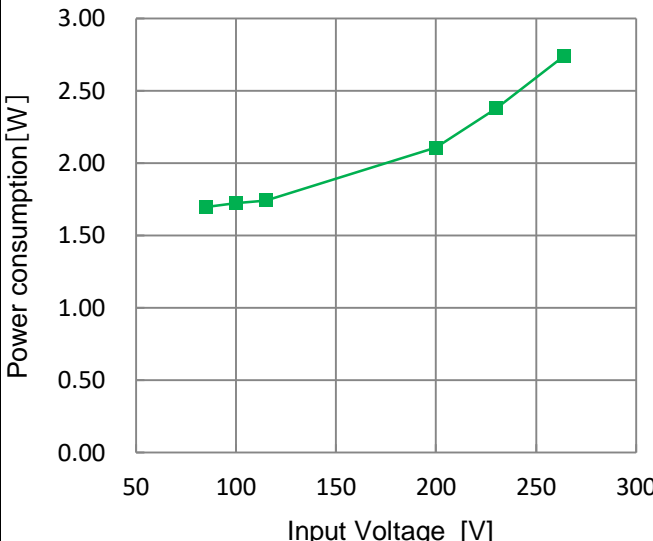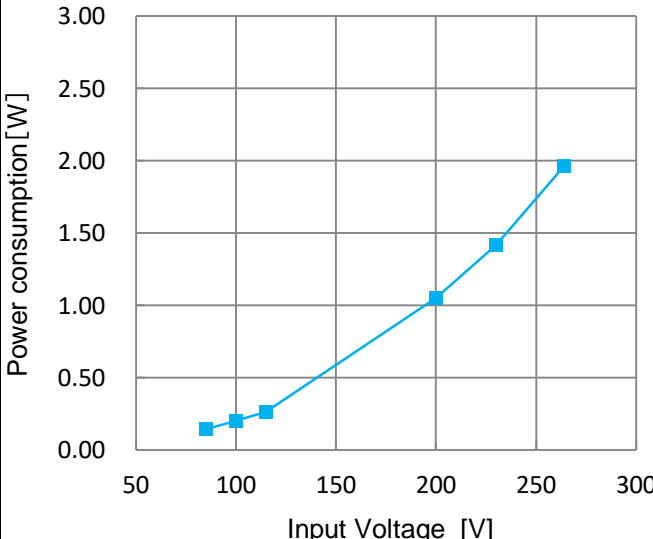Model	LFA300F-48-RTY																
Item	Power consumption by remote off	Temperature	25°C														
Object	_____	Testing Circuitry	-														
1.Graph		2.Values															
		<table><tr><th>Input voltage [V]</th><th>Power consumption [W]</th></tr><tr><td>85</td><td>1.70</td></tr><tr><td>100</td><td>1.72</td></tr><tr><td>115</td><td>1.74</td></tr><tr><td>200</td><td>2.11</td></tr><tr><td>230</td><td>2.38</td></tr><tr><td>264</td><td>2.74</td></tr></table>		Input voltage [V]	Power consumption [W]	85	1.70	100	1.72	115	1.74	200	2.11	230	2.38	264	2.74
Input voltage [V]	Power consumption [W]																
85	1.70																
100	1.72																
115	1.74																
200	2.11																
230	2.38																
264	2.74																
Test result of other output voltage product would be same as this result.																	
Model	LFA300F-48-R2TY																
1.Graph		2.Values															
		<table><tr><th>Input voltage [V]</th><th>Power consumption [W]</th></tr><tr><td>85</td><td>0.14</td></tr><tr><td>100</td><td>0.20</td></tr><tr><td>115</td><td>0.26</td></tr><tr><td>200</td><td>1.05</td></tr><tr><td>230</td><td>1.42</td></tr><tr><td>264</td><td>1.96</td></tr></table>		Input voltage [V]	Power consumption [W]	85	0.14	100	0.20	115	0.26	200	1.05	230	1.42	264	1.96
Input voltage [V]	Power consumption [W]																
85	0.14																
100	0.20																
115	0.26																
200	1.05																
230	1.42																
264	1.96																
Test result of other output voltage product would be same as this result.																	

- 5 -

BC-11503

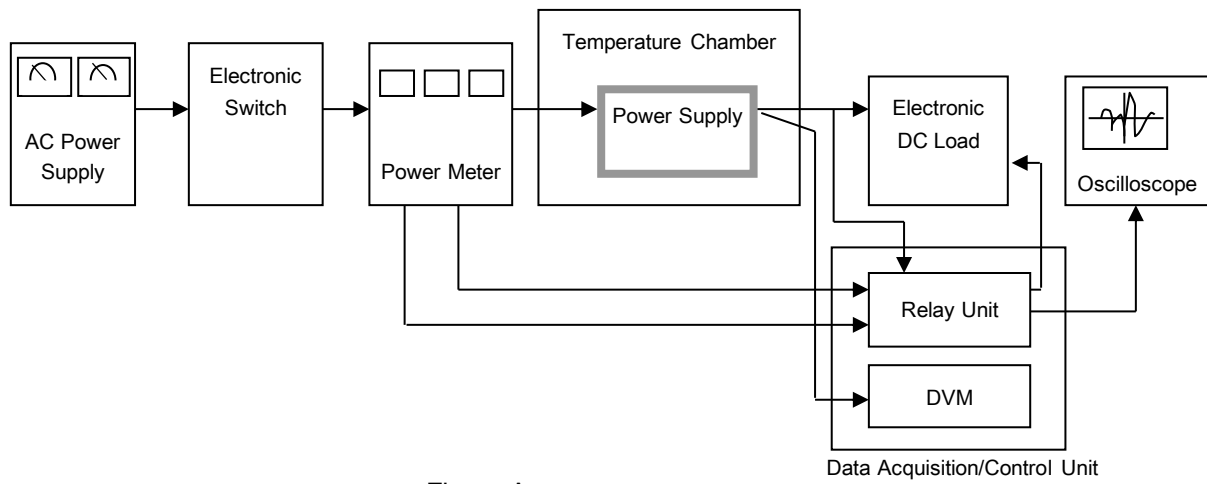


Figure A