



## DATA SHEET

Date		04-Aug-09	
Model	LFA50F-3R3-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	S.IMAMURA

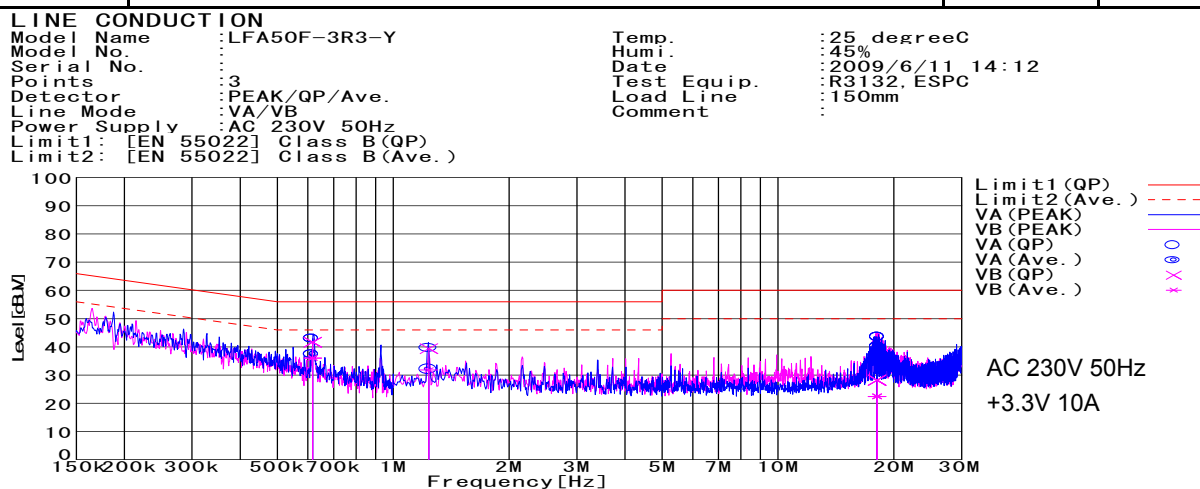

Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level (Ave.) [dBuV]	Level (QP) [dBuV]	Line	Limit (Ave.) [dBuV]	Limit (QP) [dBuV]	Margin (Ave.) [dB]	Margin (QP) [dB]
0.6172	27.4	32.9	9.9	37.3	42.8	VA	46	56	8.7	13.2
18.0756	29.8	33.3	10.2	40	43.5	VA	50	60	10	16.5
0.6176	26.1	31.8	9.9	36	41.7	VB	46	56	10	14.3

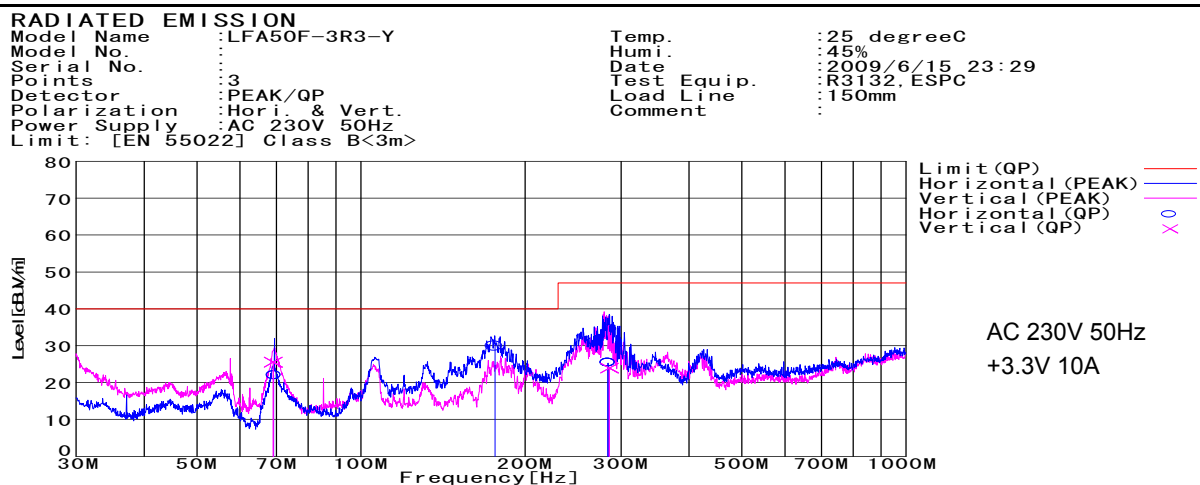

Frequency [MHz]	Meter Reading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level (QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
176.192	45	BL	8.4	-23.5	29.9	156	141	Hori.	40	10.1
69.001	43.9	BL	5	-23.4	25.5	152	113	Vert.	40	14.5
285.603	37.5	BL	12.4	-26	23.9	168	110	Vert.	47	23.1

## DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

### 1. Line conduction



### 2. Radiated emission

