



DATA SHEET		Date	09-Feb-13
Model	LFP100F-24-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.MORITA

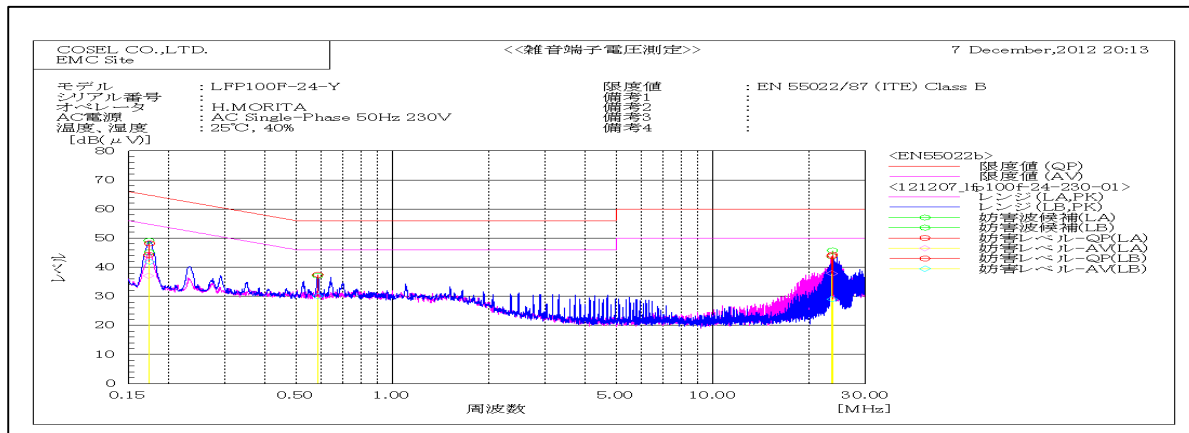


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	CAV		QP	CAV	QP	AV	QP	CAV		
0.17435	LB	31.2	24.9	17	48.2	41.9	64.8	54.8	16.6	12.9	Pass	
23.55255	LA	21.6	15.5	22.3	43.9	37.8	60	50	16.1	12.2	Pass	
23.63845	LB	22.2	7	22	44.2	29	60	50	15.8	21	Pass	
0.5854	LB	20	12.6	17.4	37.4	30	56	46	18.6	16	Pass	
0.17331	LA	27.3	20.2	16.9	44.2	37.1	64.8	54.8	20.6	17.7	Pass	

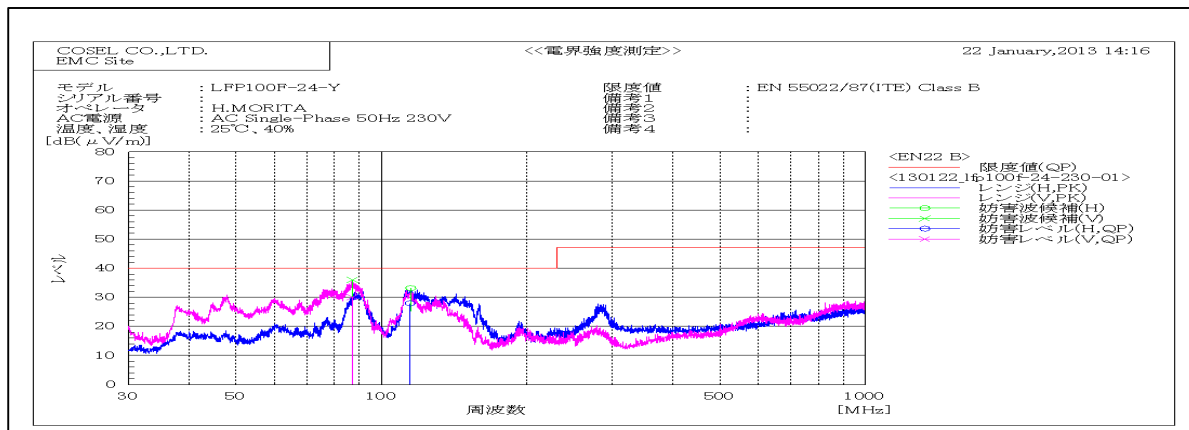

Frequency MHz	Polarization	Stability	Reading dB(μV)		Factor dB(1/m)	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	CAV		QP	CAV						
86.917	V	Stable	51.9		-21.9	30		40	10	Pass	99	270	
114.478	H	Stable	41.4		-13.5	27.9		40	12.1	Pass	157	41	

DATA SHEET		Date	09-Feb-13
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.MORITA

1. Line conduction

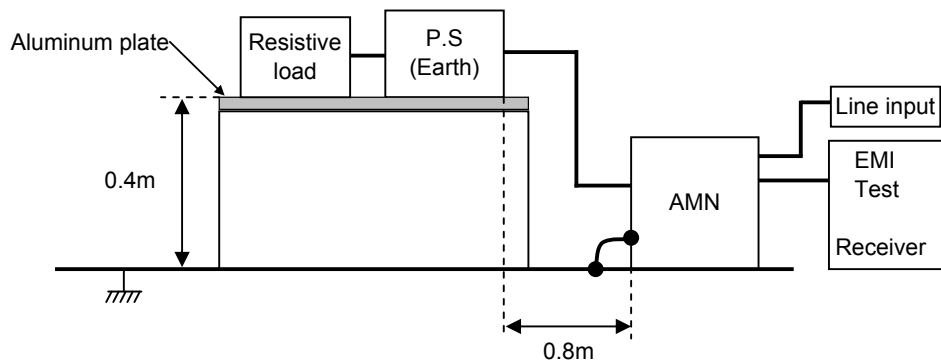

2. Radiated emission

