



DATA SHEET		Date	15-Nov-11
Model	LFP300F-30-TY	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	D.Sumiya

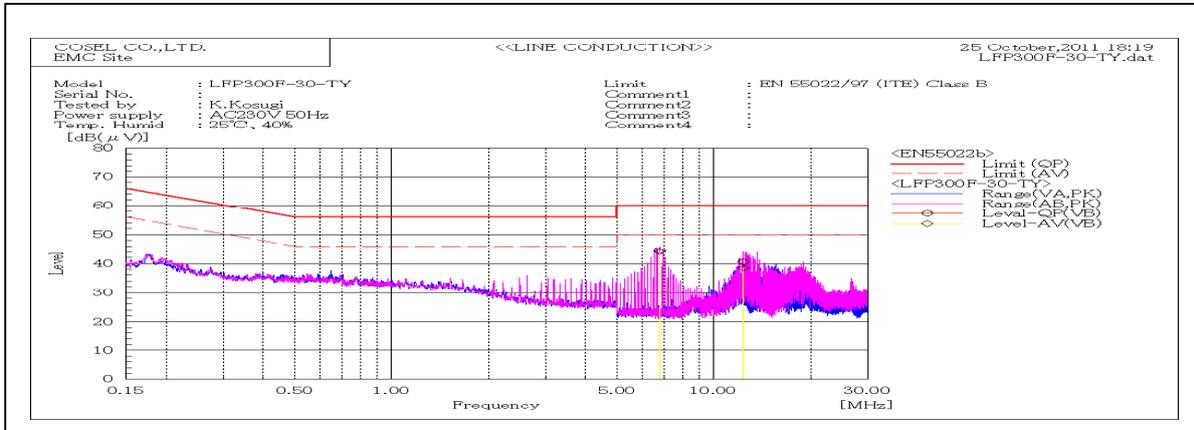


Frequency MHz	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
6.79983	VB	34.1	33.7	10.3	44.4	44	60	50	15.6	6	Pass	
12.35535	VB	30.1	28	10.5	40.6	38.5	60	50	19.4	11.5	Pass	

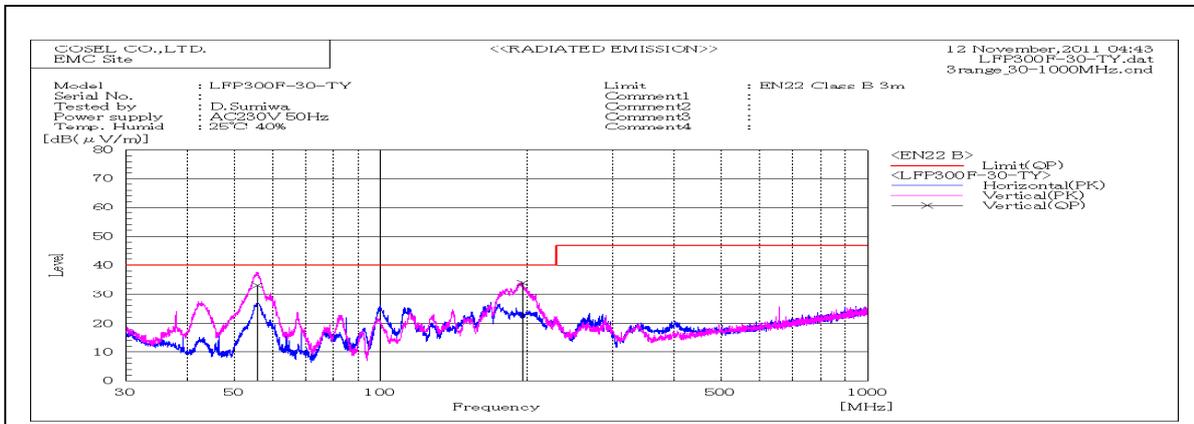

Frequency MHz	Polarization	Stability	Reading dB(uV)		Space Loss dB	Level dB(mW)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP			QP	QP					
55.808	V	Stable	57.2	-24	33.2	40	6.8	Pass	102	56		
195.372	V	Stable	48.9	-14.9	34	40	6	Pass	110	228		

DATA SHEET		Date	15-Nov-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	D.Sumiya

1. Line conduction

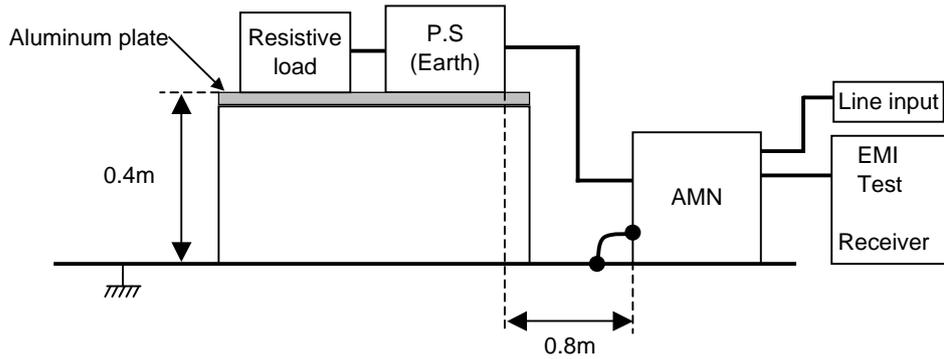

2. Radiated emission

