



DATA SHEET		Date	15-Nov-11
Model	LFP300F-36-TY	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	D.Sumiya

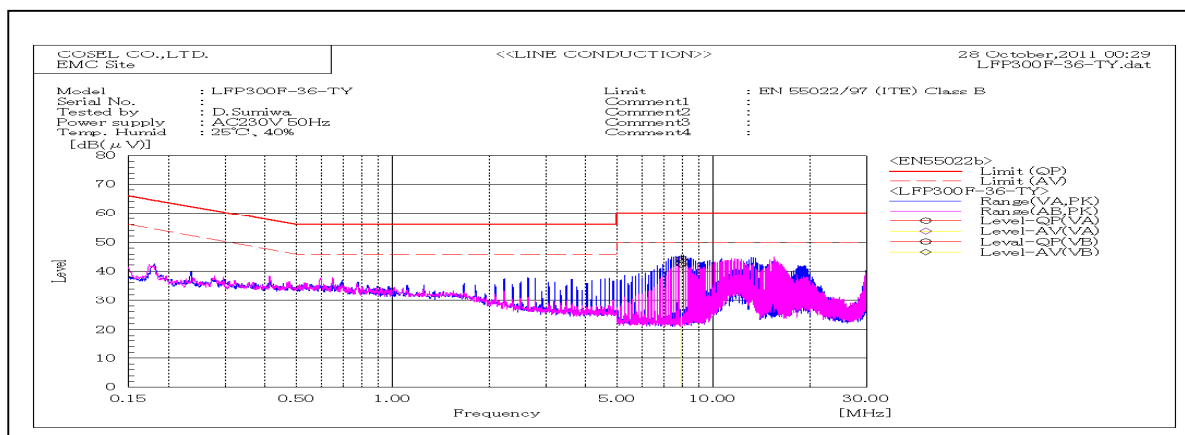


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
7.93855	VB	32.2	31.7	10.4	42.6	42.1	60	50	17.4	7.9	Pass	
7.94373	VA	33.6	33.2	10.4	44	43.6	60	50	16	6.4	Pass	

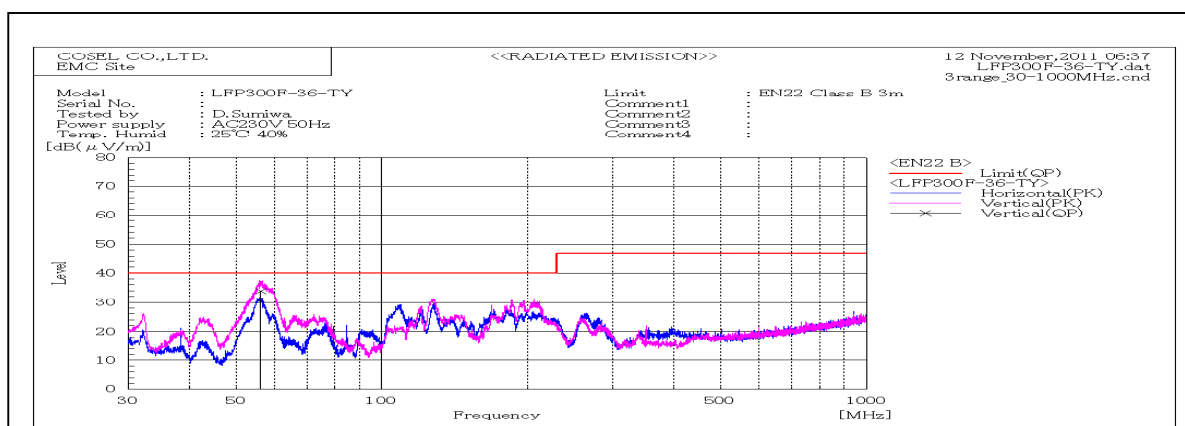

Frequency MHz	Polariz ation	Stability	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP		QP	QP					
56.236	V	Stable	57.9	-24	33.9	40	6.1	Pass	109	75	

DATA SHEET		Date	15-Nov-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	D.Sumiya

1. Line conduction

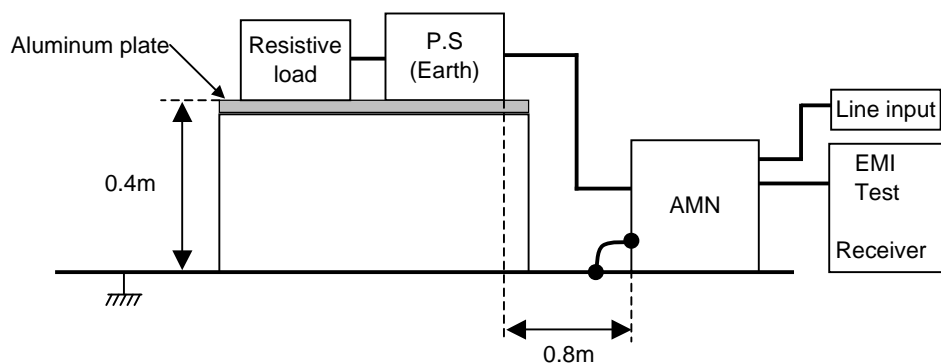

2. Radiated emission

