


DATA SHEET		Date	29-Feb-08
Model	LGA75A-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Murara

LINE CONDUCTION

Model Name : LGA75A-24
 Model No. :
 Serial No. :
 Points : 5
 Detector : PEAK/QP/Ave.
 Line Mode : VA/VB
 Power Supply : AC 100V 60Hz
 Limit1: [EN 55022] Class B(QP)
 Limit2: [EN 55022] Class B(Ave.)

Temp. : 25 degreeC
 Humi. : 45 %
 Date : 2008/2/29 11:18
 Test Equip. : R3132,ESPC
 Load Line : 150 mm
 Comment :

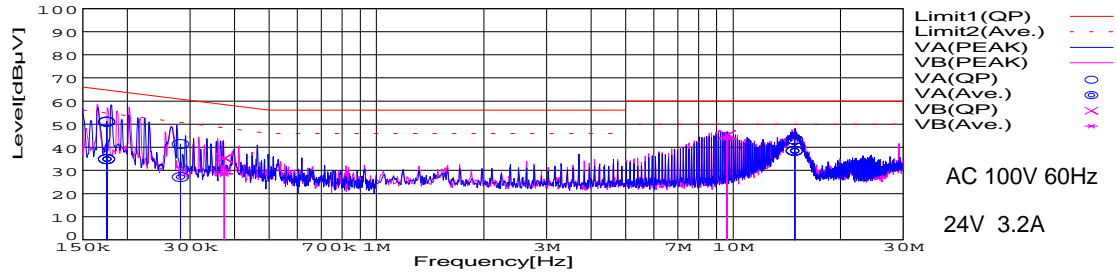


Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.1753	25	41.3	9.8	34.8	51.1	VA	54.7	64.7	19.9	13.6
0.2822	17.3	31.6	9.8	27.1	41.4	VA	50.8	60.8	23.7	19.4
14.8835	28.2	33.1	10.2	38.4	43.3	VA	50	60	11.6	16.7
0.374	18.6	25.4	9.9	28.5	35.3	VB	48.4	58.4	19.9	23.1
9.6169	33.9	35.2	10.1	44	45.3	VB	50	60	6	14.7

RADIATED EMISSION

Model Name : LGA75A-24
 Model No. :
 Serial No. :
 Points : 3
 Detector : PEAK/QP
 Polarization : Hori. & Vert.
 Power Supply : AC 100V 60Hz
 Limit: [EN 55022] Class B<3m>

Temp. : 25 degreeC
 Humi. : 45 %
 Date : 2008/2/15 20:46
 Test Equip. : R3132,ESPC
 Load Line : 150 mm
 Comment :

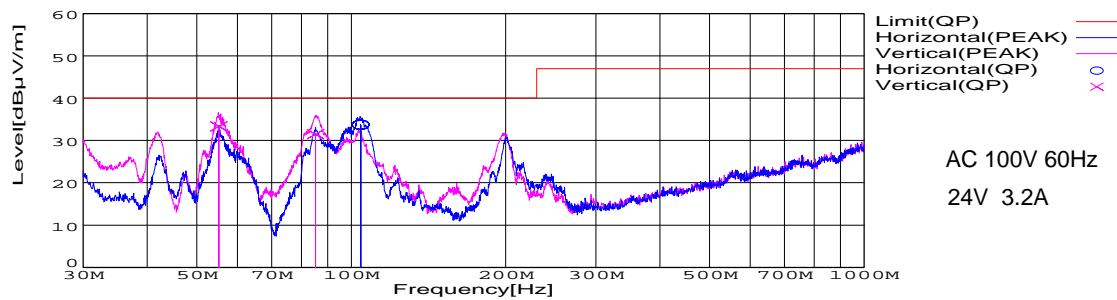

Frequency [MHz]	Meter Reading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
104.347	55.3	BL	10.1	-31.7	33.7	81	136	Hori.	40	6.3
55.232	59.8	BL	5.6	-32.1	33.3	273	145	Vert.	40	6.7
85.244	55.4	BL	8	-31.9	31.5	295	114	Vert.	40	8.5

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction



2. Radiated emission

