



DATA SHEET		Date	08-Feb-22
Model	LHA10F-3R3-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Yamamoto

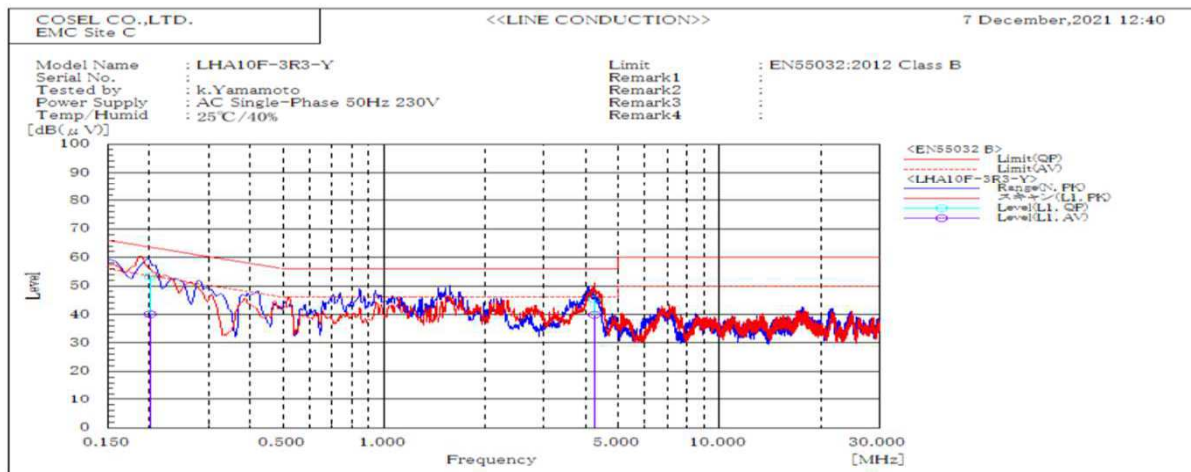

Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
4.242	L1	45.3	39.9	56	46	10.7	6.1	Pass	
0.201	L1	53.4	40.1	63.6	53.6	10.2	13.5	Pass	

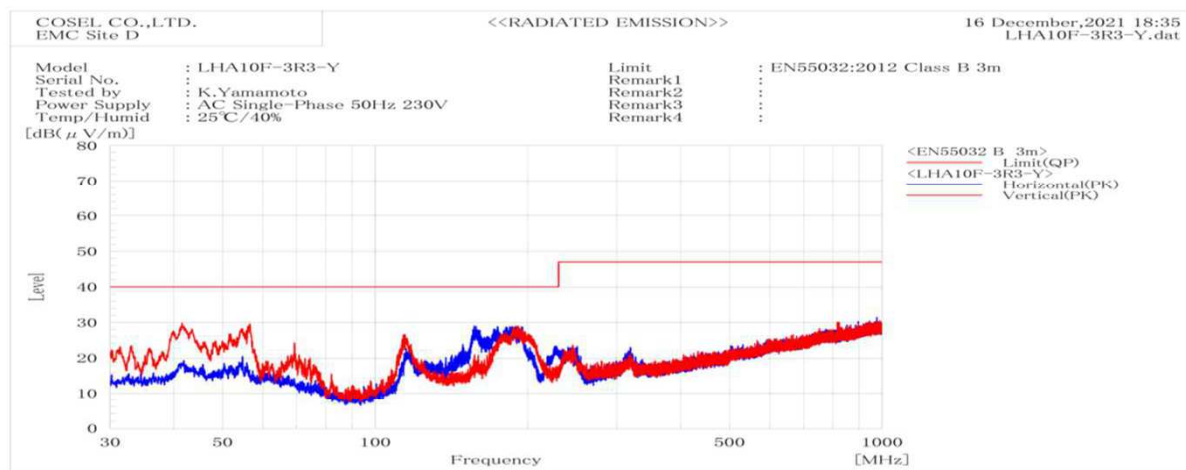


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP				
41.629	V	Stable	29.8	40	10.2	Pass	100	39	


# DATA SHEET

		Date	08-Feb-22
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Yamamoto

## 1. Line conduction

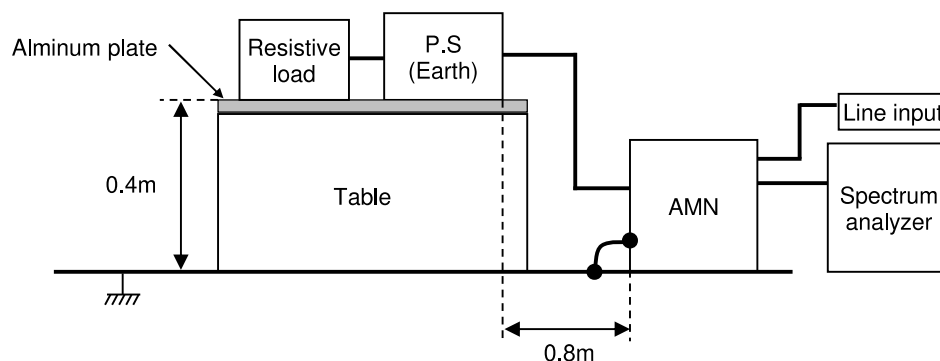

## 2. Radiated emission

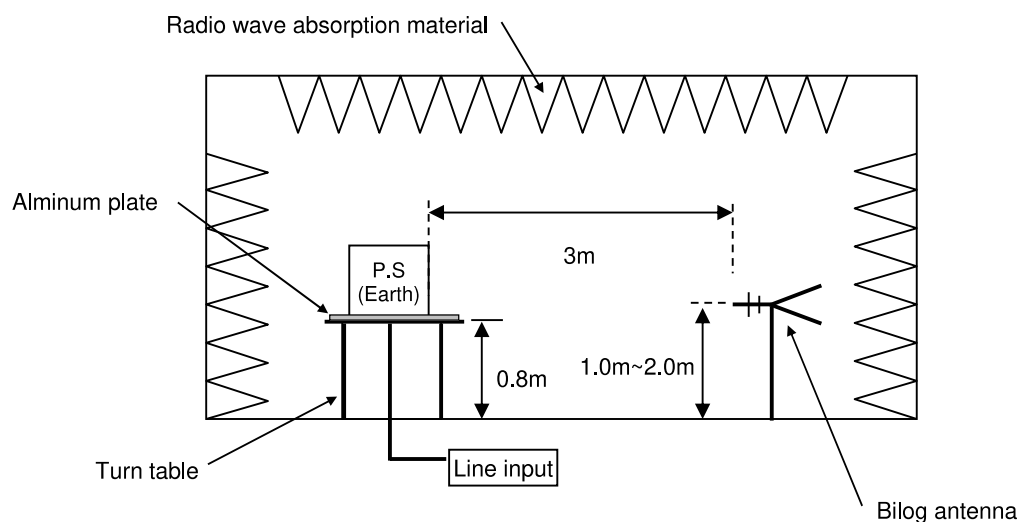


## Conditions

Test : EMI  
Model Name : LHA10F

## Photographs of test set-up

### 1.LINE CONDUCTION

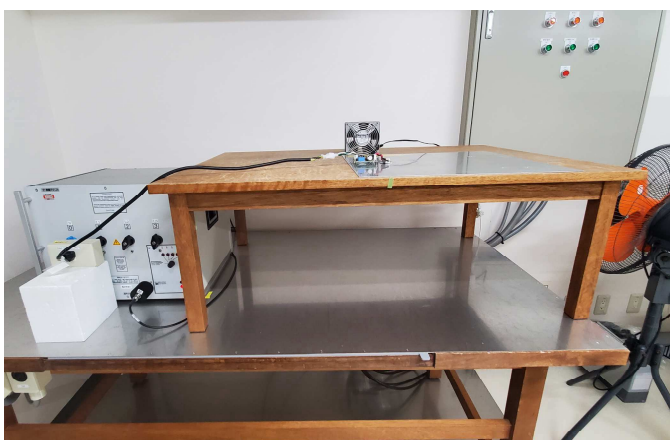

### 2.RADIATED EMISSION

