



DATA SHEET			Date	12-Sep-19
Model	LHA300F-12-Y		Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission		Humid.	40 %RH
			Tested by	K.Miyazaki

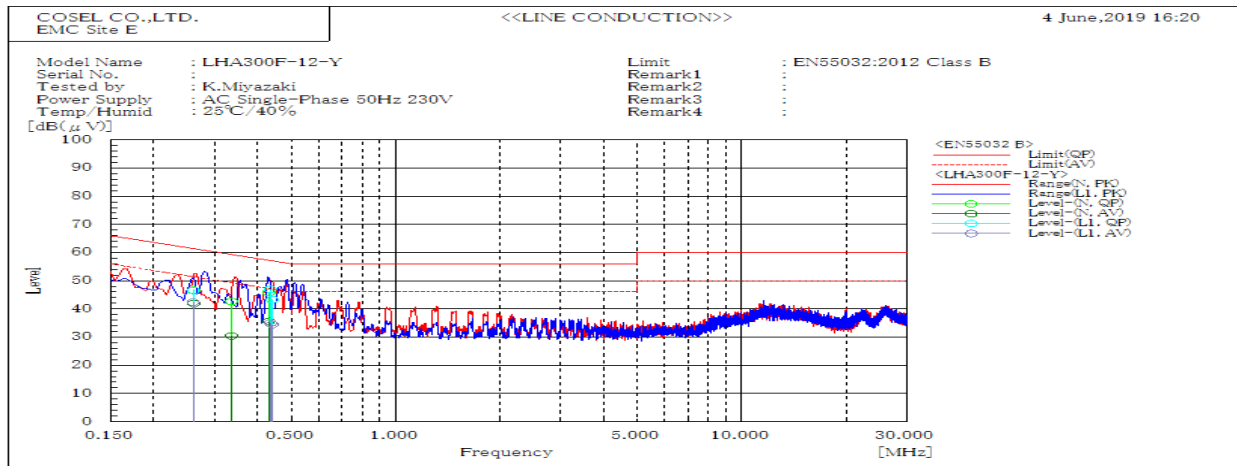


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.26	L1	46.5	42.4	61.4	51.4	14.9	9	Pass	
0.435	L1	47	35	57.2	47.2	10.2	12.2	Pass	
0.44	L1	43.3	34.4	57.1	47.1	13.8	12.7	Pass	
0.261	N	46.7	42	61.4	51.4	14.7	9.4	Pass	
0.336	N	42.7	30.4	59.3	49.3	16.6	18.9	Pass	
0.43	N	45.9	35.6	57.2	47.2	11.3	11.6	Pass	

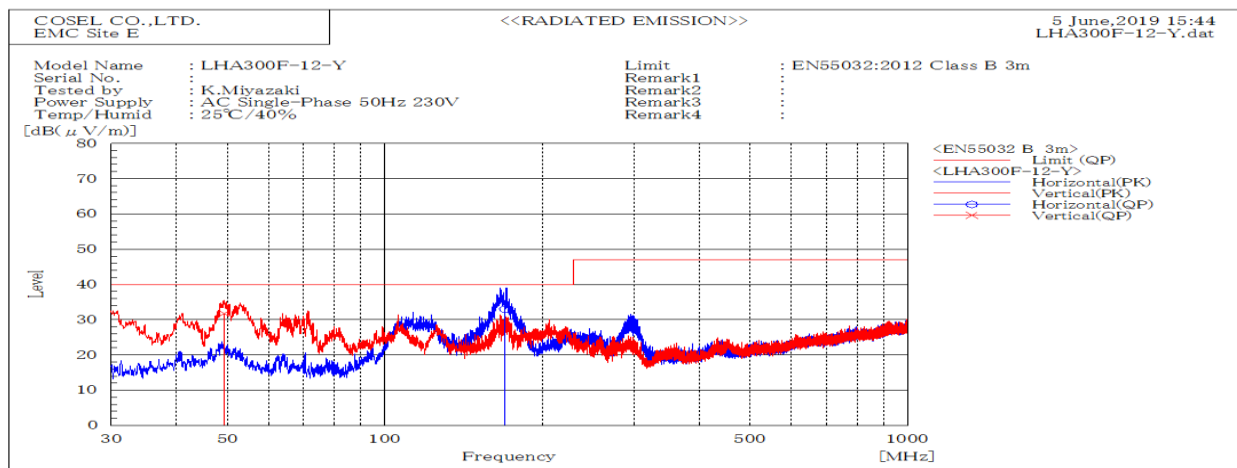


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
49.257	V	Stable	31.8	40	8.2	Pass	100.2	0	
170.063	H	Stable	33	40	7	Pass	194.5	193	

DATA SHEET		Date	12-Sep-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Miyazaki

1. Line conduction

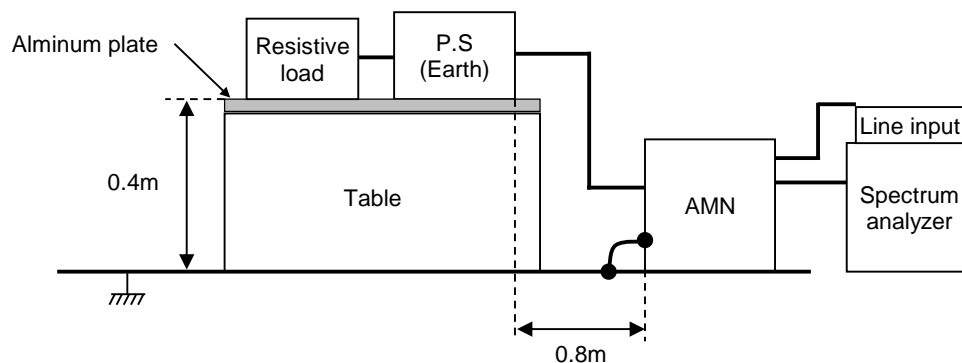

2. Radiated emission

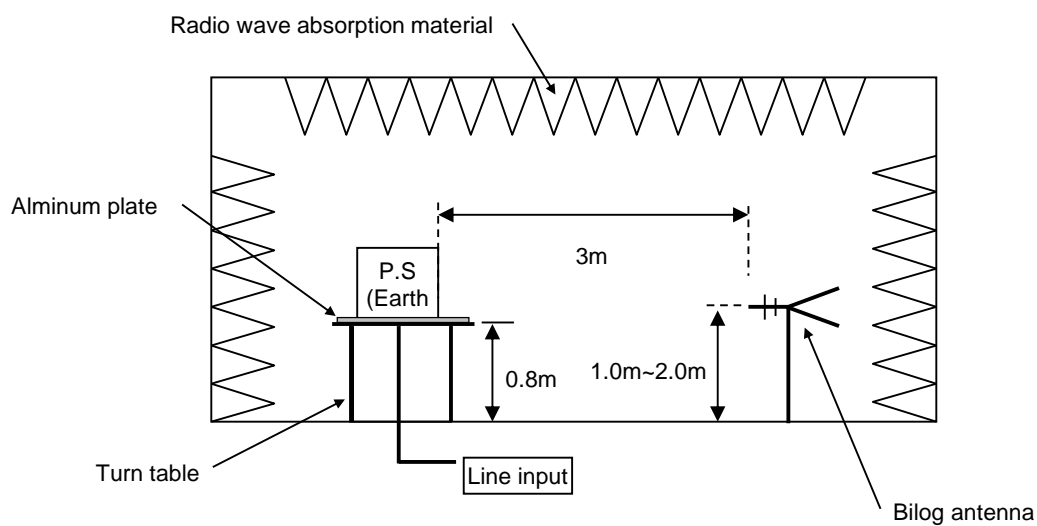

Conditions

Test : EMI

Model Name : LHA300F-12-Y

Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

