



DATA SHEET			Date	12-Sep-19
Model	LHA300F-48-Y		Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission		Humid.	40 %RH
			Tested by	K.Miyazaki

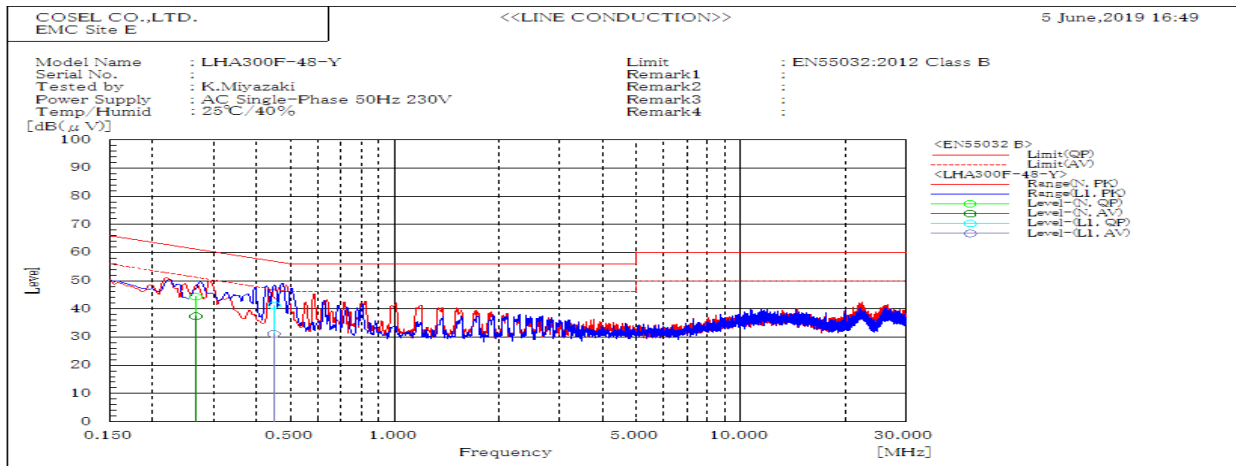


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.448	L1	41.3	31.1	56.9	46.9	15.6	15.8	Pass	
0.267	N	44.3	37.4	61.2	51.2	16.9	13.8	Pass	

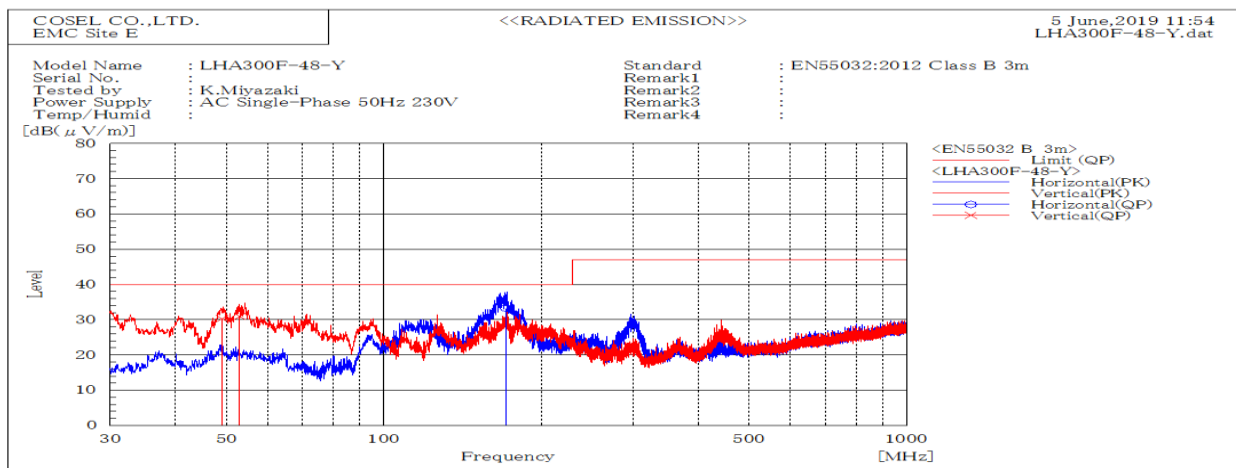


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
53.087	V	Stable	30.9	40	9.1	Pass	100	75.3	
49.084	V	Stable	30.3	40	9.7	Pass	100	0	
171.486	H	Stable	33.2	40	6.8	Pass	194.9	187.4	

DATA SHEET		Date	12-Sep-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Miyazaki

1. Line conduction

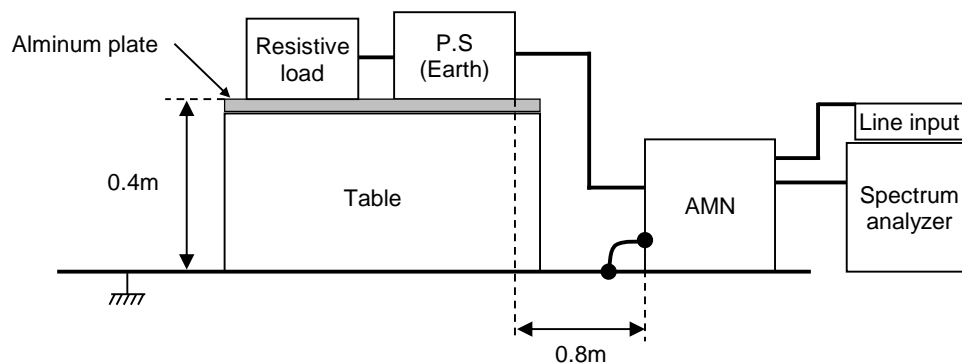

2. Radiated emission

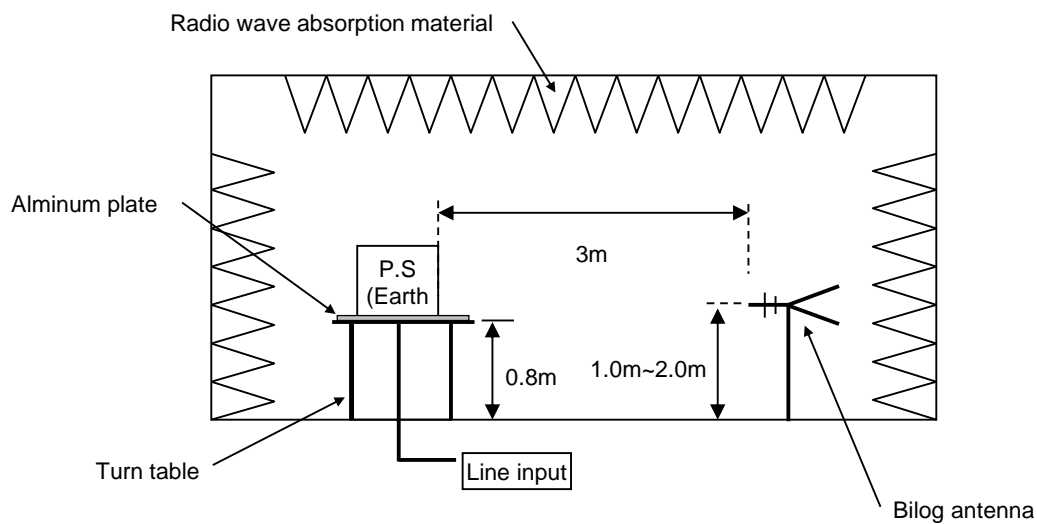

Conditions

Test : EMI

Model Name : LHA300F-48-Y

Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

