



DATA SHEET		Date	11-Oct-19
Model	LHA50F-3R3-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Haginaka

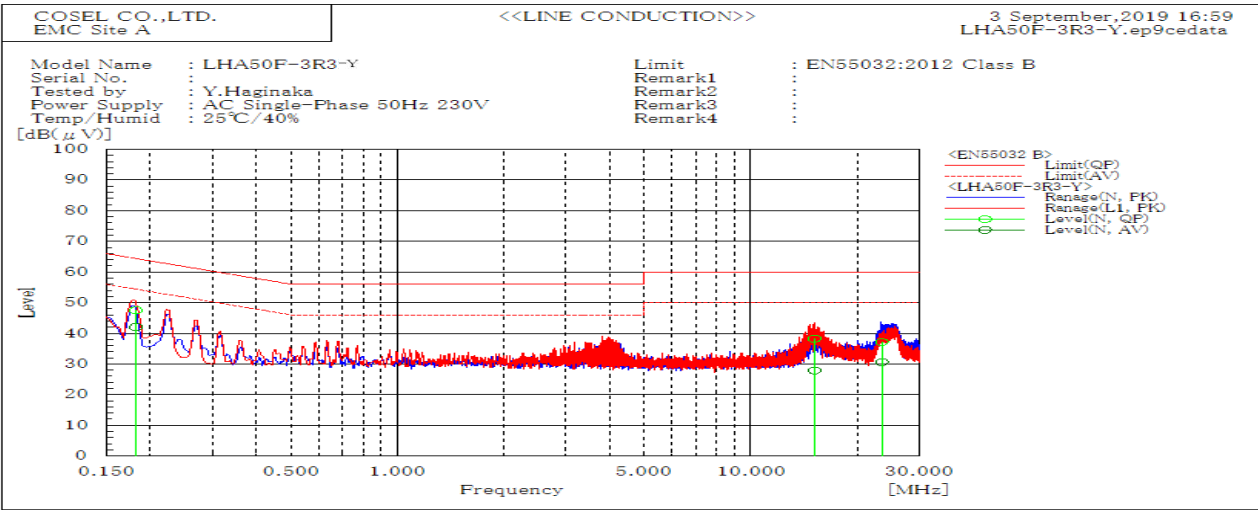


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.182	N	47.5	42.1	64.4	54.4	16.9	12.3	Pass	
15.138	N	38.3	27.9	60	50	21.7	22.1	Pass	
23.46	N	37.2	30.6	60	50	22.8	19.4	Pass	

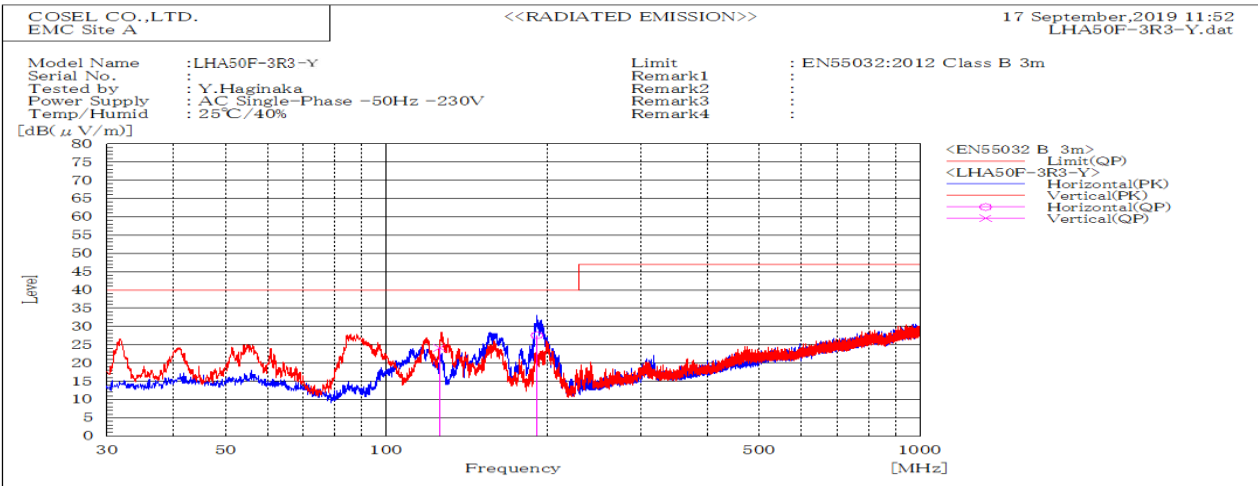


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
191.501	H	Stable	27.6	40	12.4	Pass	175	13.1	
126.077	V	Stable	24.1	40	15.9	Pass	100	180.2	

DATA SHEET		Date	11-Oct-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Haginaka

1. Line conduction

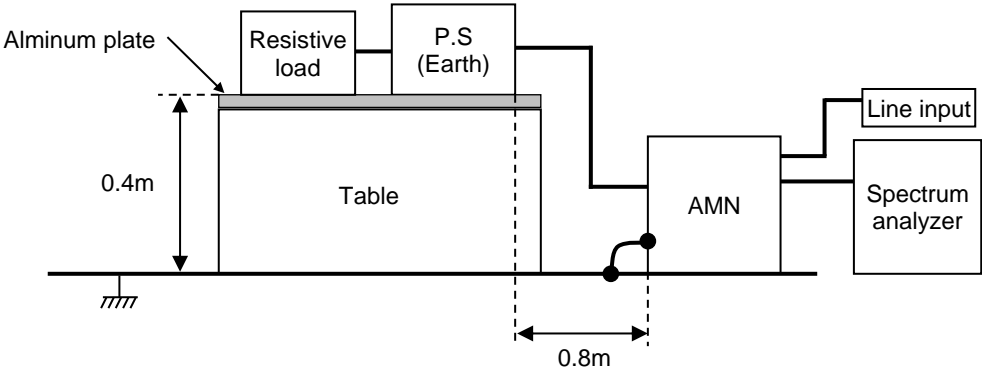

2. Radiated emission

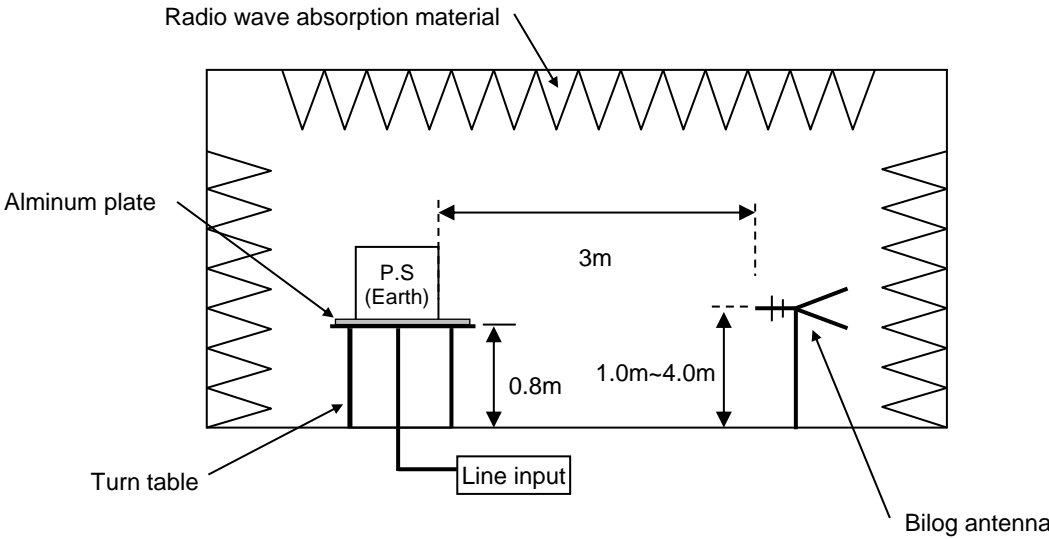

Conditions

Test : EMI
Model Name : LHA50F

Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

