



DATA SHEET		Date	09-Oct-19
Model	LHA75F-3R3-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Takai

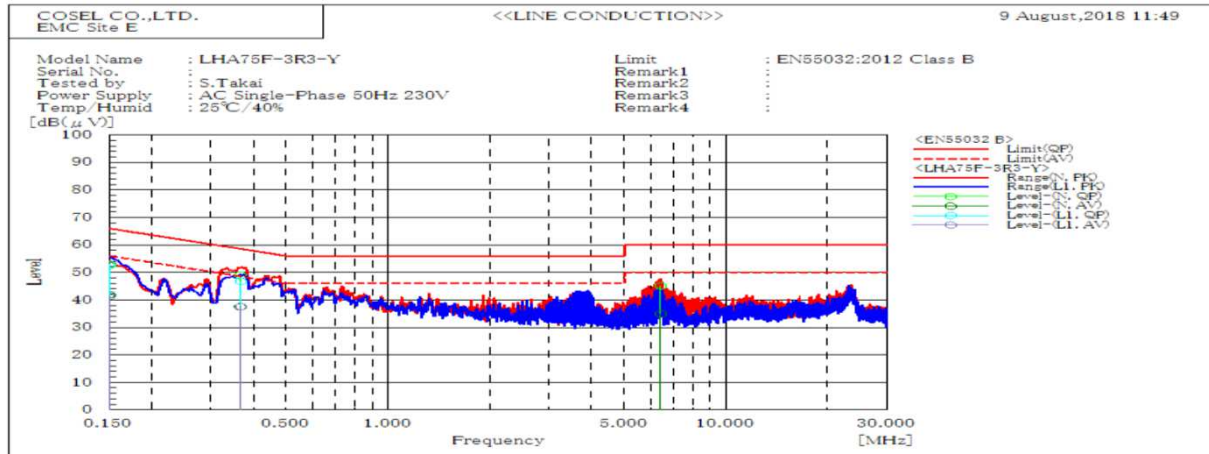


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.15	L1	53	41.4	66	56	13	14.6	Pass	
0.368	L1	46.8	37.5	58.6	48.6	11.8	11.1	Pass	
0.366	N	49.1	37.6	58.6	48.6	9.5	11	Pass	
0.15	N	52.5	42	66	56	13.5	14	Pass	
6.414	N	45.2	34.9	60	50	14.8	15.1	Pass	

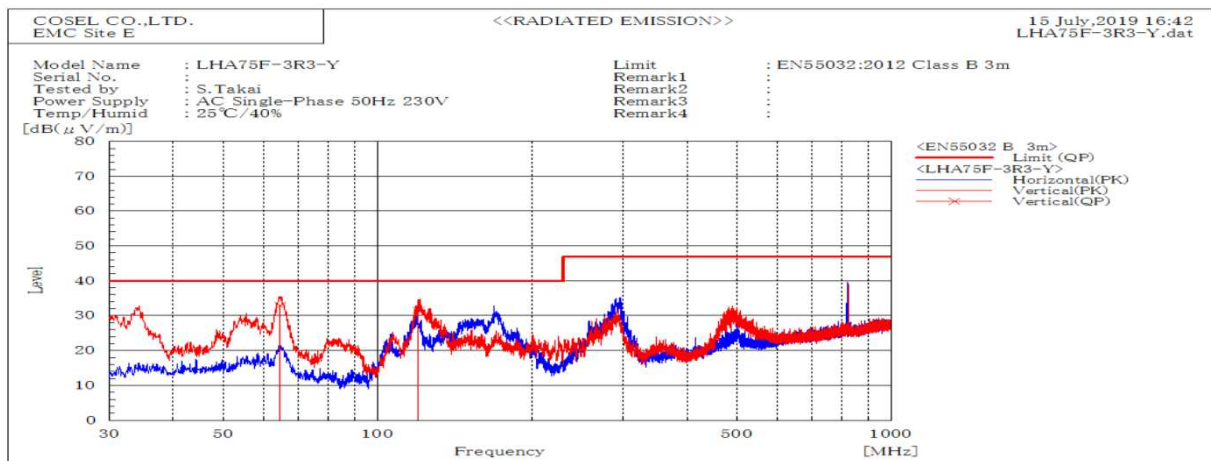


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
64.541	V	Stable	33	40	7	Pass	100	311	
120.162	V	Stable	31.6	40	8.4	Pass	121.4	270	

DATA SHEET		Date	09-Oct-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Takai

1. Line conduction

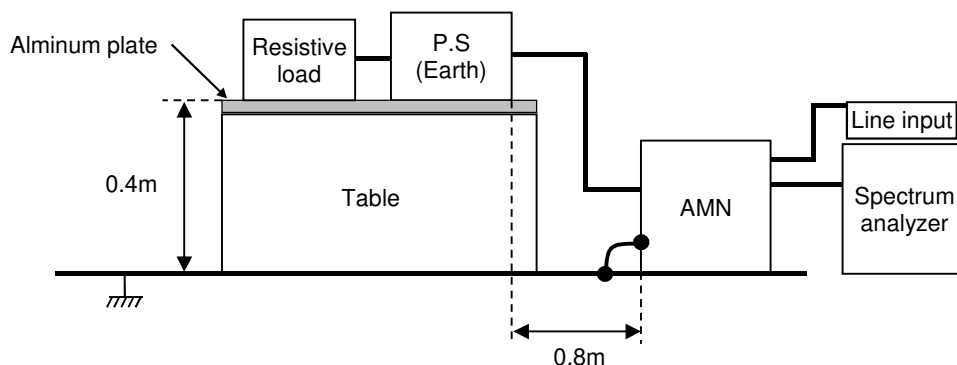

2. Radiated emission

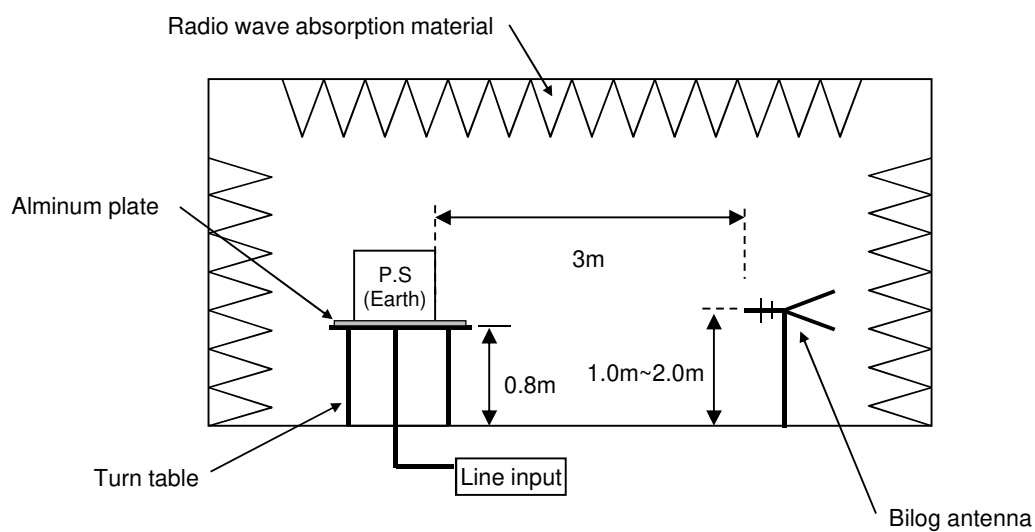

Conditions

Test : EMI

Model Name : LHA75F-3R3-Y

Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

