



DATA SHEET		Date	09-Oct-19
Model	LHA75F-5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Takai

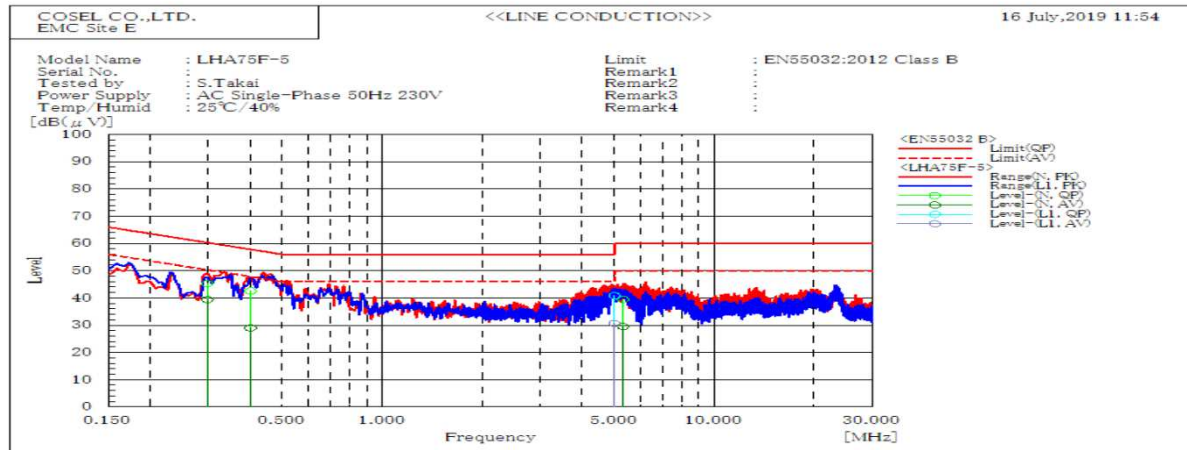


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
4.998	L1	40.9	30.7	56	46	15.1	15.3	Pass	
5.299	N	39.5	29.5	60	50	20.5	20.5	Pass	
0.401	N	42.6	29	57.8	47.8	15.2	18.8	Pass	
0.298	N	45.3	39.4	60.3	50.3	15	10.9	Pass	

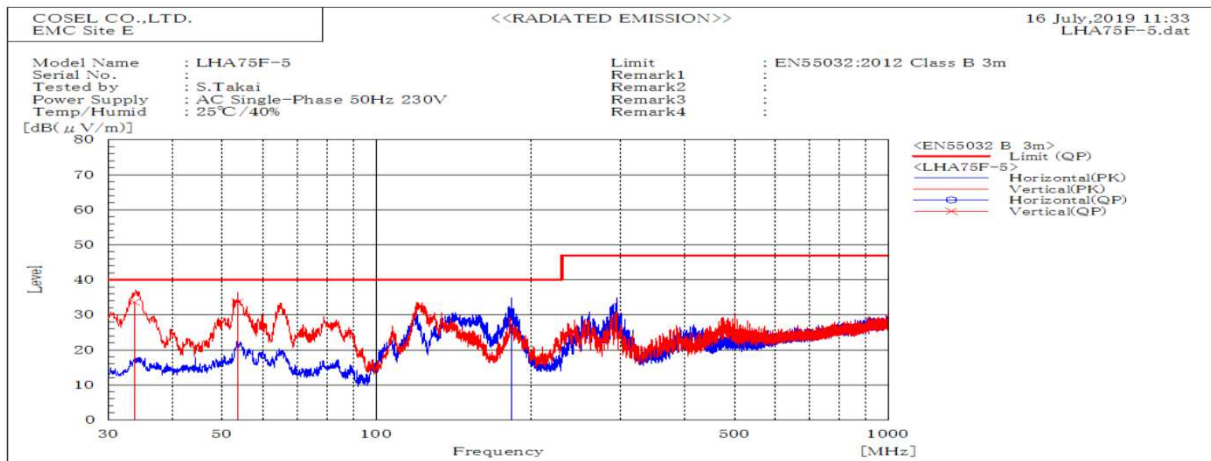


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB		cm	deg	
			QP	QP	QP				
33.691	V	Stable	33.7	40	6.3	Pass	100.2	191.7	
53.545	V	Stable	33.7	40	6.3	Pass	100.2	279.3	
183.666	H	Stable	27.5	40	12.5	Pass	200	163.6	

DATA SHEET		Date	09-Oct-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Takai

1. Line conduction

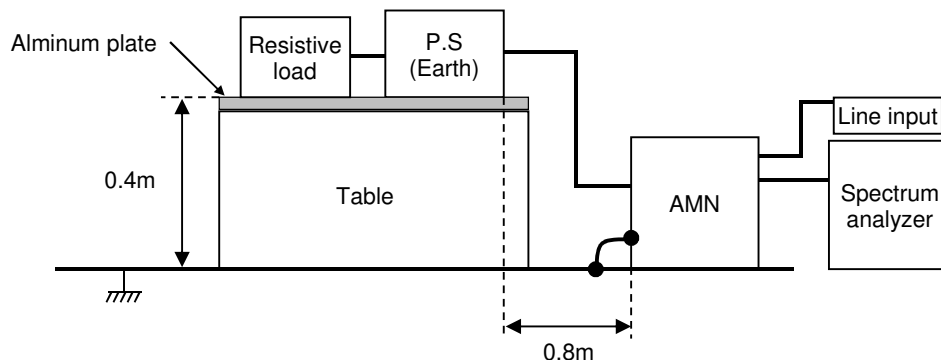

2. Radiated emission

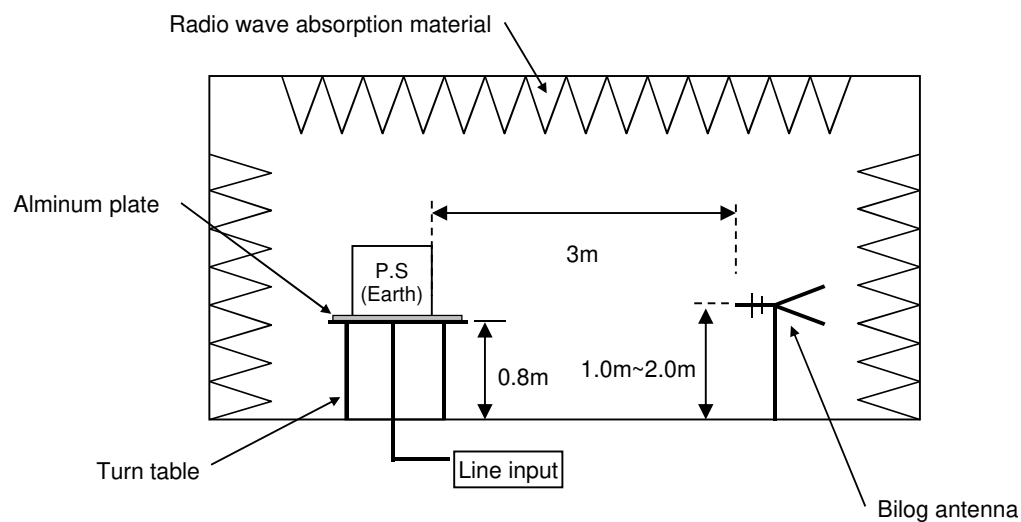

Conditions

Test : EMI
Model Name : LHA75F-5

Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

