



DATA SHEET		Date	05-Jul-21
Model	LHP150F-30-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Nakao

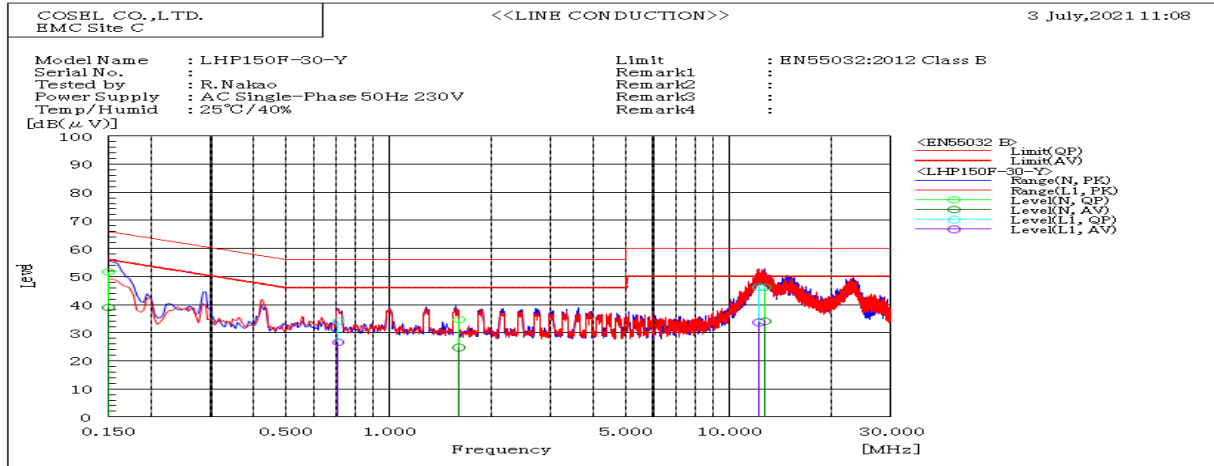


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.150	N	51.7	39.1	66.0	56.0	14.3	16.9	Pass	
1.603	N	34.7	24.8	56.0	46.0	21.3	21.2	Pass	
12.832	N	46.1	34.1	60.0	50.0	13.9	15.9	Pass	
0.710	L1	34.1	26.6	56.0	46.0	21.9	19.4	Pass	
12.262	L1	46.1	33.7	60.0	50.0	13.9	16.3	Pass	

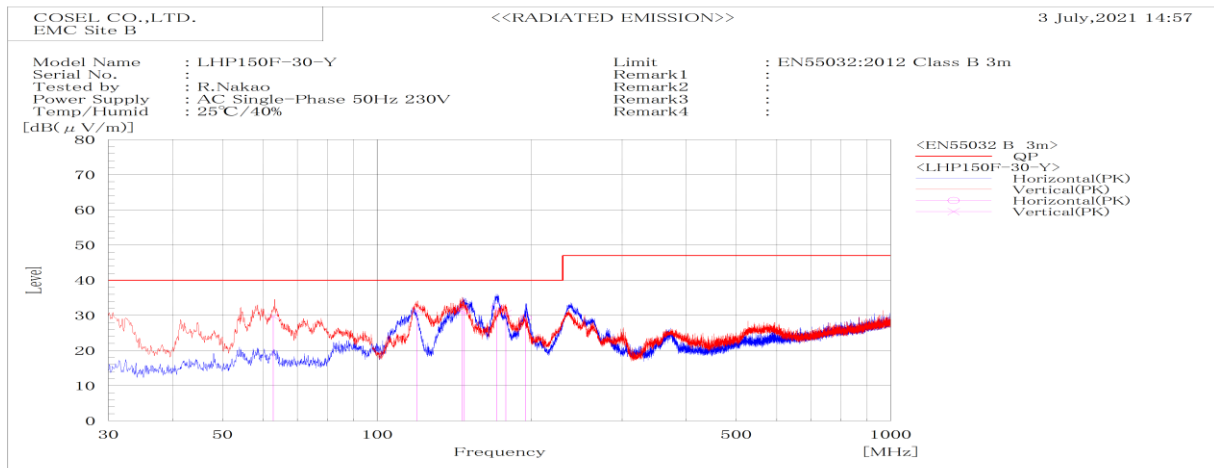


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	AV						
148.061	H	Stable	31.4	40.0	8.6	Pass	199.7	216.0		
171.209	H	Stable	32.4	40.0	7.6	Pass	199.7	322.2		
194.768	H	Stable	29.3	40.0	10.7	Pass	199.7	164.6		
62.818	V	Stable	29.7	40.0	10.3	Pass	100.0	321.2		
119.705	V	Stable	31.3	40.0	8.7	Pass	101.4	267.6		
146.381	V	Stable	31.3	40.0	8.7	Pass	100.0	130.7		
178.126	V	Stable	30.6	40.0	9.4	Pass	101.4	271.9		

DATA SHEET		Date	05-Jul-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Nakao

1. Line conduction

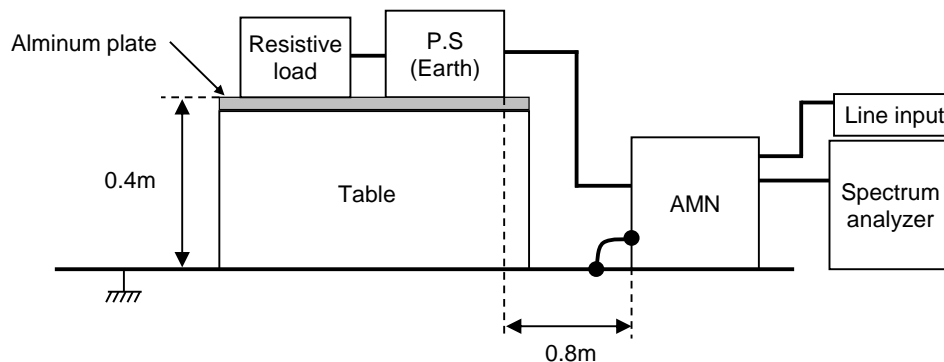

2. Radiated emission

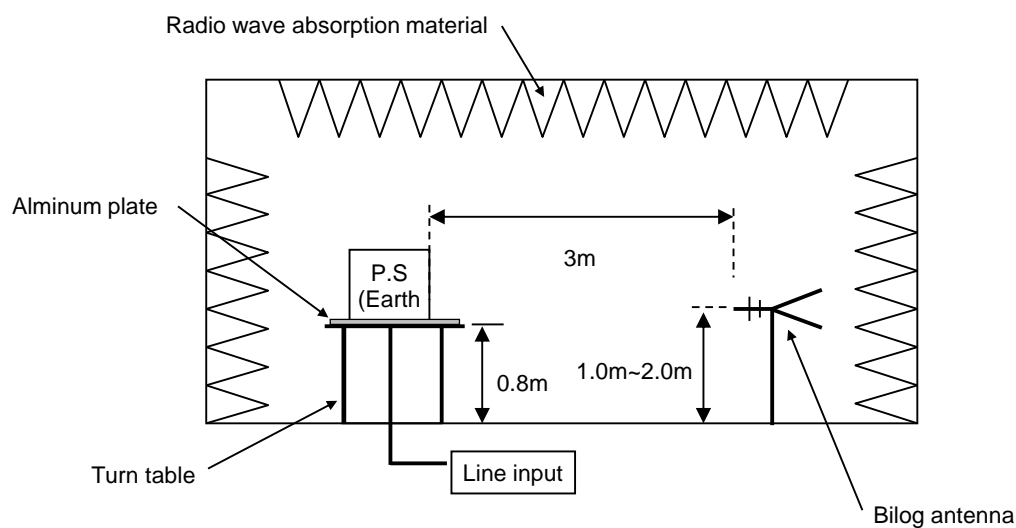


Conditions

Test : EMI
Model Name : LHP150F-30-Y

Photographs of test set-up

1.LINE CONDUCTION

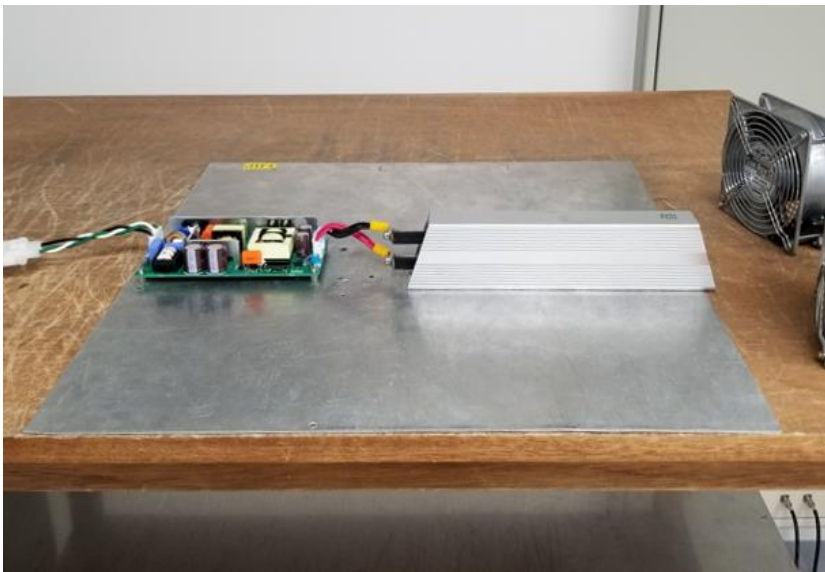

2.RADIATED EMISSION

