



DATA SHEET		Date	05-Jul-21
Model	LHP300F-30-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Nakao

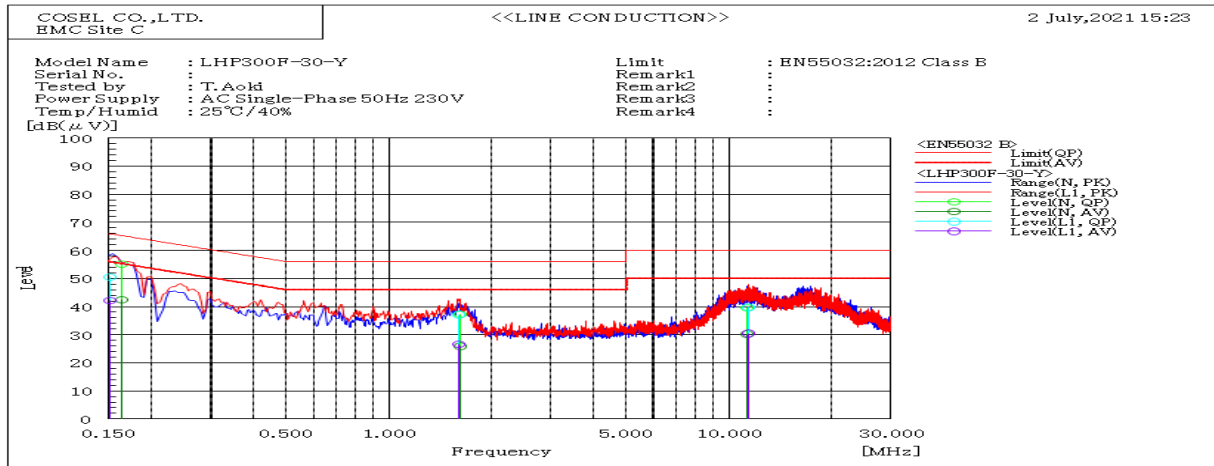


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.163	N	55.1	42.5	65.3	55.3	10.2	12.8	Pass	
1.628	N	37.3	25.9	56.0	46.0	18.7	20.1	Pass	
11.329	N	39.6	30.2	60.0	50.0	20.4	19.8	Pass	
0.151	L1	50.6	42.1	65.9	55.9	15.3	13.8	Pass	
1.600	L1	37.1	26.5	56.0	46.0	18.9	19.5	Pass	
11.487	L1	39.8	30.5	60.0	50.0	20.2	19.5	Pass	

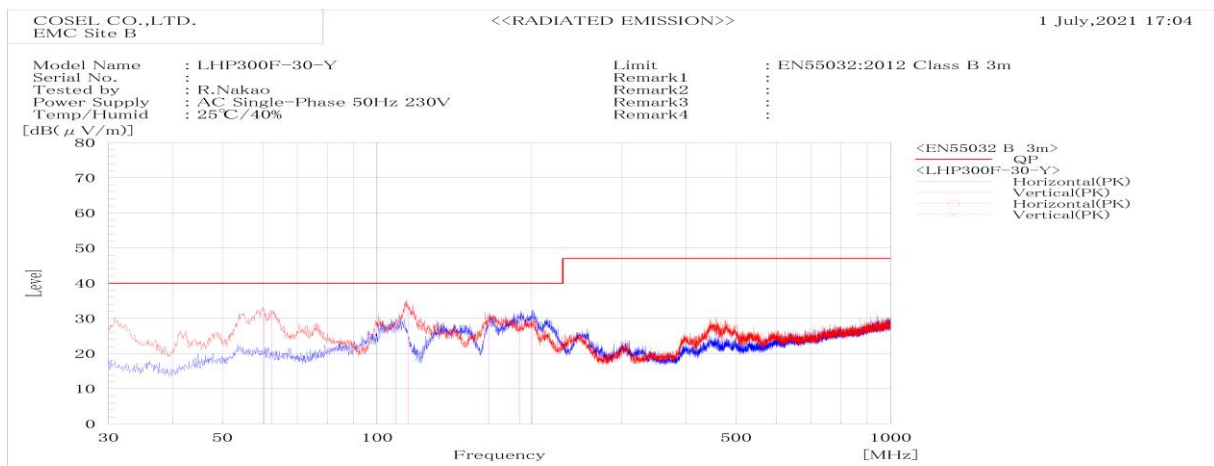


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP					
108.996	H	Stable	27.0	40.0	13.0	Pass	180.6	197.5	
189.356	H	Stable	29.2	40.0	10.8	Pass	199.7	187.5	
200.653	H	Stable	28.1	40.0	11.9	Pass	199.7	344.2	
60.212	V	Stable	31.0	40.0	9.0	Pass	100.4	358.4	
62.394	V	Stable	30.1	40.0	9.9	Pass	100.4	303.8	
114.84	V	Stable	31.5	40.0	8.5	Pass	113.3	120.8	
165.277	V	Stable	28.2	40.0	11.8	Pass	100.2	247.9	

DATA SHEET		Date	05-Jul-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Nakao

## 1. Line conduction

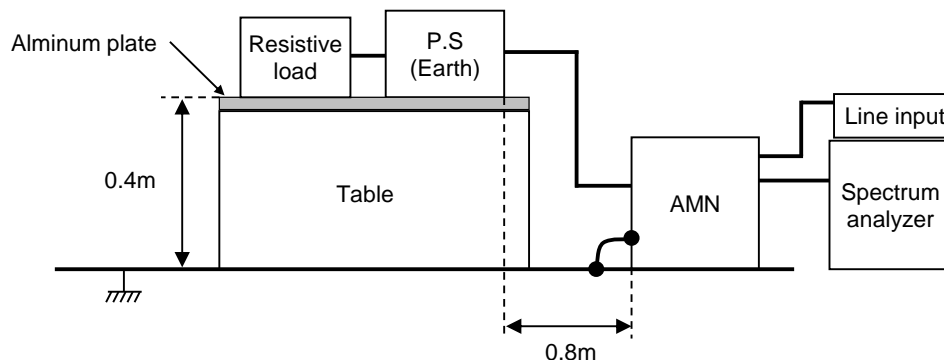

## 2. Radiated emission

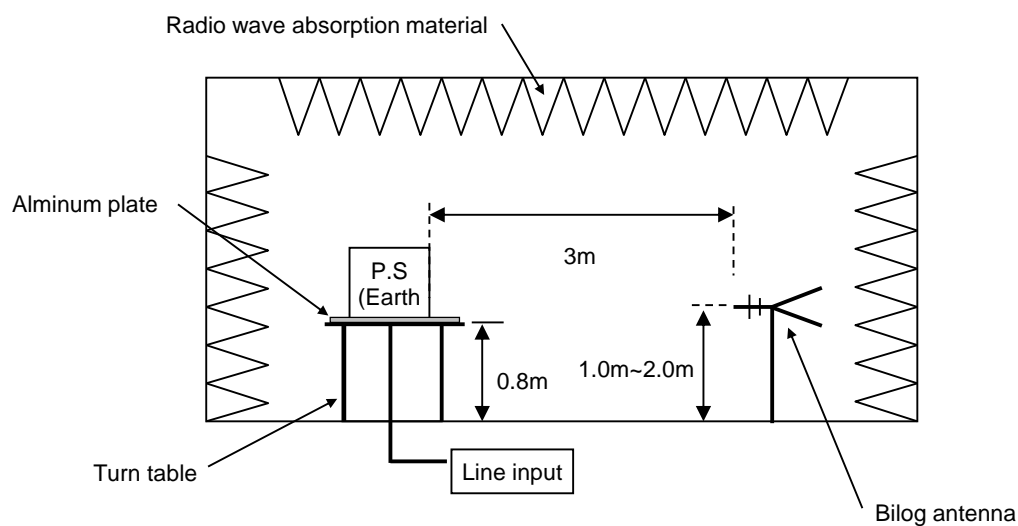


## Conditions

Test : EMI  
Model Name : LHP300F-30-Y

## Photographs of test set-up

### 1.LINE CONDUCTION

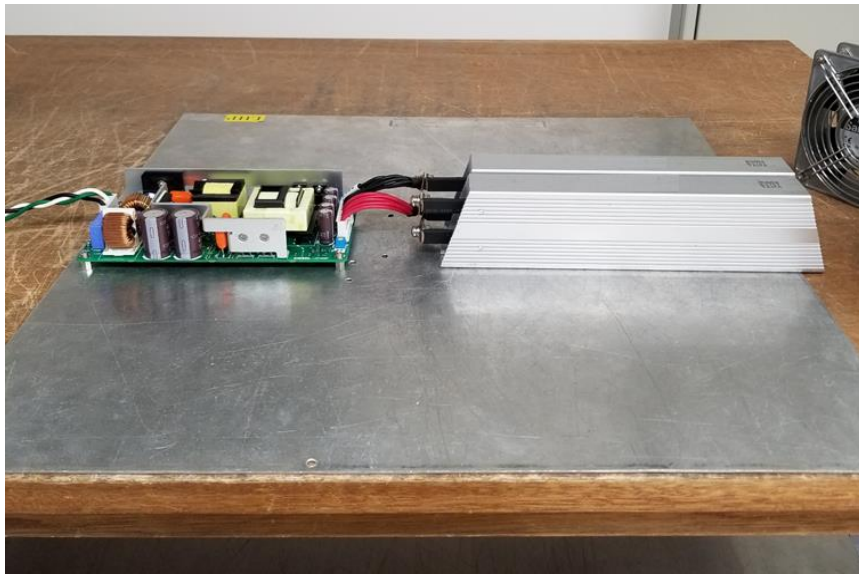

### 2.RADIATED EMISSION

