



DATA SHEET		Date	21-Sep-10
Model	MGW152415	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Ueda

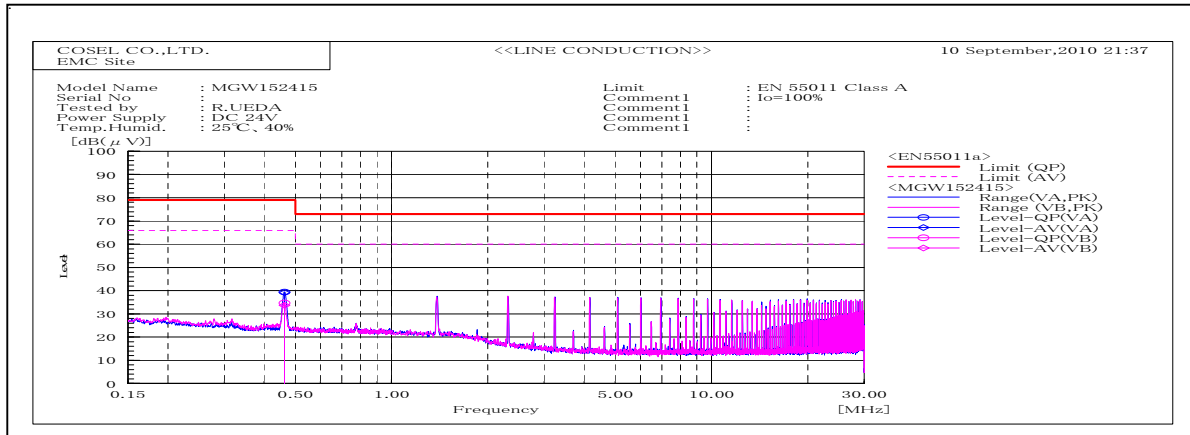

Frequency MHz	Harm	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
			QP	AV		QP	AV	QP	AV	QP	AV		
0.46261		VA	29.3	29	10.1	39.4	39.1	79	66	39.6	26.9	Pass	
0.46276		VB	24.7	23.7	10	34.7	33.7	79	66	44.3	32.3	Pass	

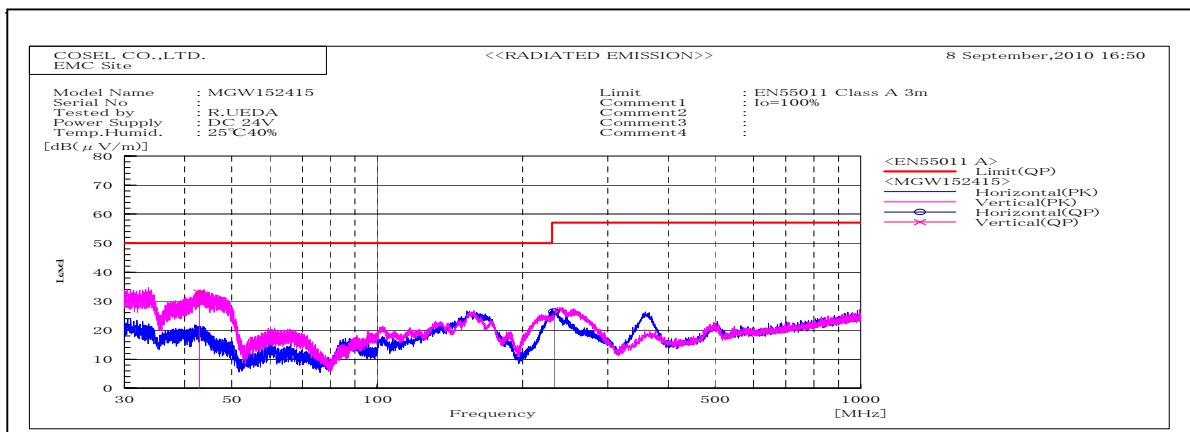

Frequency MHz	Polarization	Stability	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP		QP	QP					
42.884	V	Stable	53	-20.1	32.9	50	17.1	Pass	103	215	
231.998	H	Stable	45.8	-19.4	26.4	57	30.6	Pass	156	1	

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction



2. Radiated emission






Conditions


Test : EMI
Model Name : MGS1524□□/MGW1524□□

○Photographs of Test Set-Up

LINE CONDUCTION

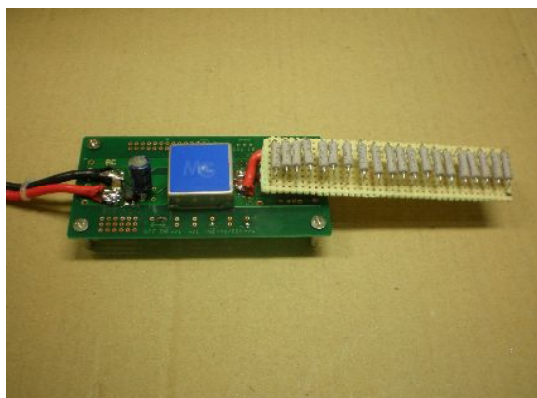

RADIATED EMISSION

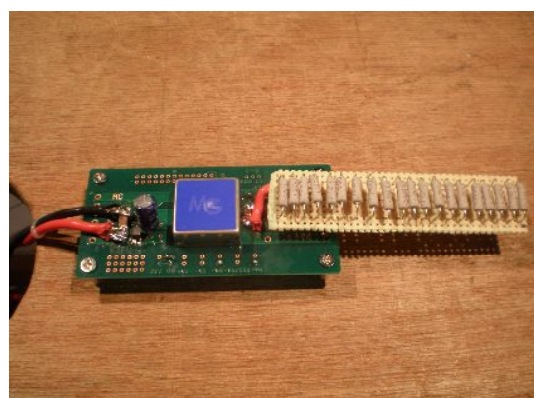

○Testing circuitry

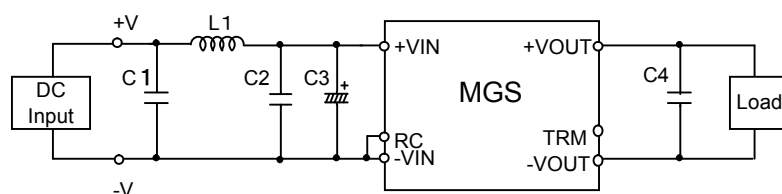


Fig.1 Testing circuitry 1

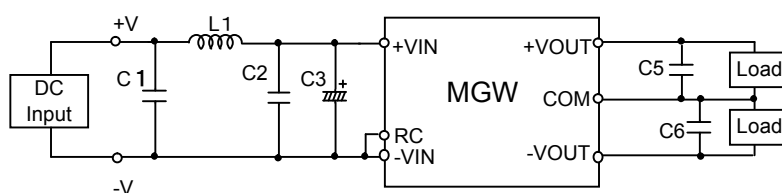


Fig.2 Testing circuitry 2

L1	:	2.2 μ H	CI4C-2R2	(KORIN ELECTRONICS)
C1,C2	:	50V 6.8 μ F	C4532X7R1H685MT	(TDK)
C3	:	50V 100 μ F	LXZ50VB100M	(NIPPON CHEMI-CON)
C4,C5,C6	:	25V 22 μ F	CM32X5R226K25A	(KYOCERA)