

Temperature increase of main components

Model: MHFS324□□


1. Conditions

- (1) Input :DC 24 [V]
- (2) Output :Rated output
- (3) Cooling method :Convection cooling
- (4) Mounting method :Shown as Fig.1.1

2. Result

Table 2.1 Temperature increase of main components

No.	Parts name	Symbol No.	Increase (ΔT)					Rated temp. [°C]	Reference
			[deg]						
			3.3V	5V	9V	12V	15V		
1	Switching MOS-FET	TR101	31	31	29	28	32	150	Junction Temp.
2	Switching MOS-FET	TR111	31	34	30	30	34	150	Junction Temp.
3	Input Choke Coil	L101	29	31	27	26	30	125	
4	Rectified diode(Output)	D201	36	35	29	27	26	150	Junction Temp.
5	Transformer	T11	31	34	30	30	33	130	
6	Photocoupler	PC11	27	27	24	23	26	125	Junction Temp.
7	Case	CASE	29	30	27	26	28	105	Top Surface Center
8									
9									
10									
11									
12									
13									
14									
15									
16									
17									
18									
19									
20									

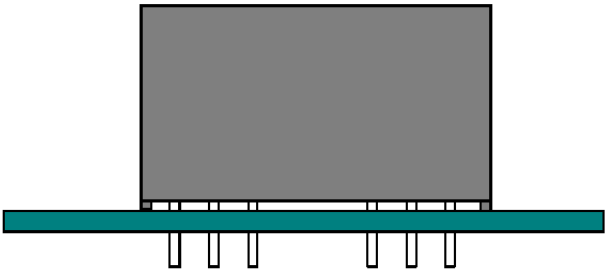

(Side view)

Fig.1.1 Mounting method
(Normal position)